


FED. SUP CLASS
2320

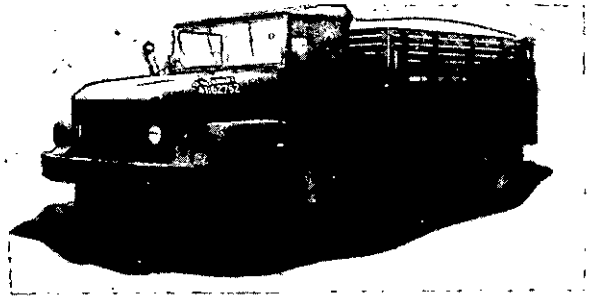

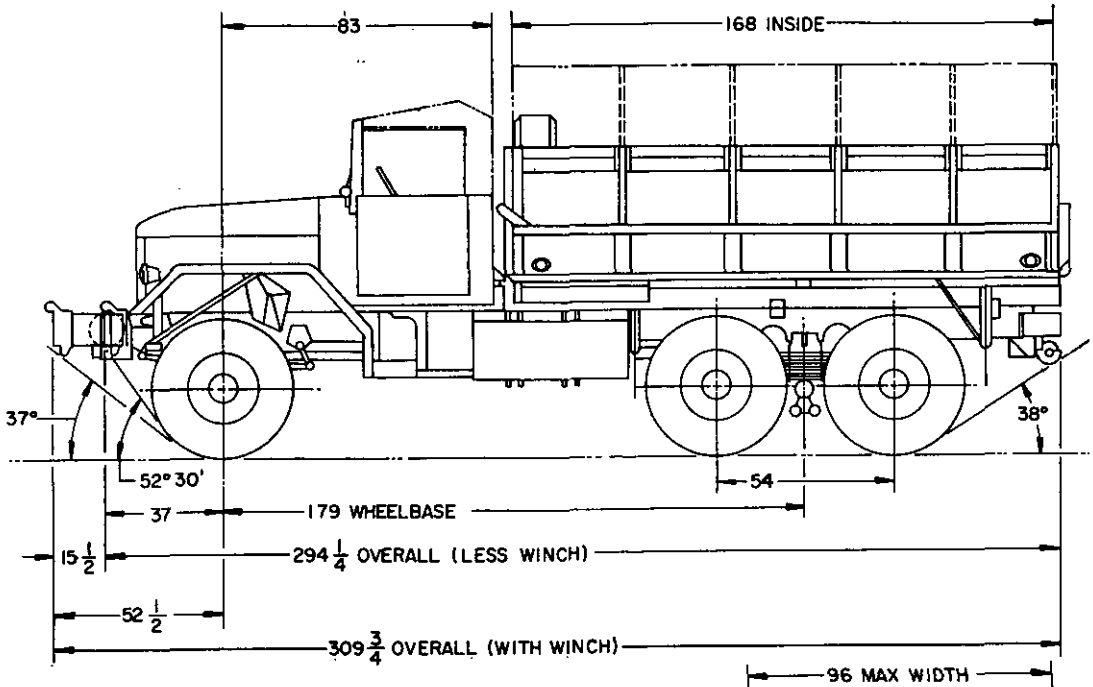

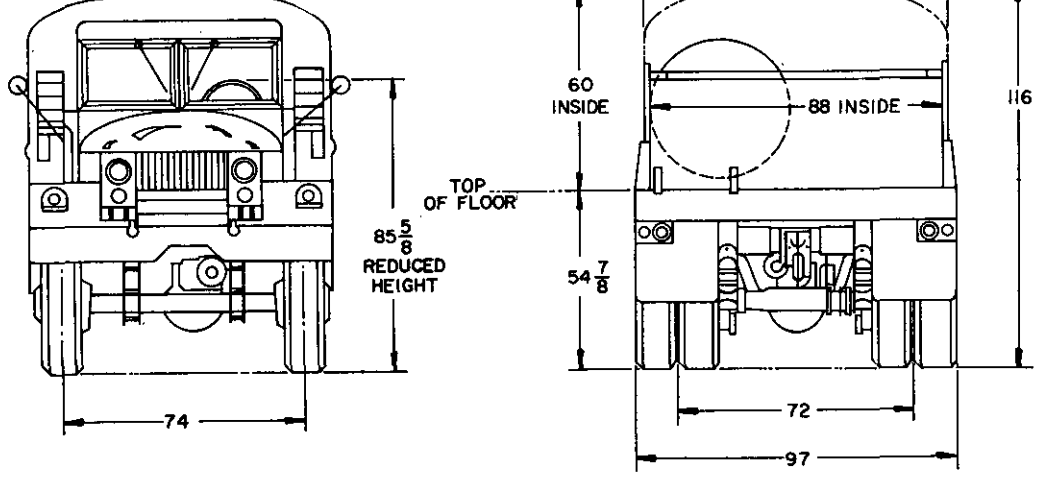

REVIEW ACTIVITIES: ARMY-EL; NAVY-MC
USER ACTIVITY: NAVY-DOCKS

APPROVED 8 FEBRUARY 1965 REVISED (A) 20 MARCH 1974

(A)

CANCELLED AFTER 20 MARCH 1974

SUPERSEDED BY MIL-T-740 (M813)

MS PART NO	DRAWING NO	
MS 53087-1	8358335	WITH WINCH
MS 53087-2	8358348	LESS WINCH

P.A. MO (ATAC)
Other Cust
Navy-MC

TITLE

TRUCK, CARGO, 5 TON, 6 X 6, 179 INCH WHEELBASE, M54

MILITARY STANDARD

MS 53087

PROCUREMENT SPECIFICATION
MIL-T-740

SUPERSEDES:

SHEET 1 OF 2

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:21Z
Check the source to verify that this is the current version before use.

DD FORM 1 SEP 67 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

FED. SUP CLASS 2320

VEHICLE CHARACTERISTICS

MODEL M54 CHASSIS M40
CHASSIS PART No. 8358350 W/WINCH MS51395-1
CHASSIS PART No. 8358349 LESS/WINCH MS51395-2
CURB WEIGHT: FULLY EQUIPPED LESS PAYLOAD AND PERSONNEL

	WO/WINCH	W/WINCH
FRONT AXLE	7884	8735
REAR AXLE (BOGIE)	11347	11210
TOTAL	19231	19945

WEIGHT DISTRIBUTION: LOADED WITHOUT CREW

	CROSS COUNTRY WO/W	CROSS COUNTRY W/W	HIGHWAY WO/W	HIGHWAY W/W
PAYLOAD	10000	10000	20000	20000
FRONT AXLE	8300	9050	8750	9500
INTER AXLE	10600	10525	15375	15300
REAR AXLE	10600	10525	15375	15300
TOTAL-LBS.	29500	30100	39500	40100

TOWED LOAD ALLOWANCE
LIMITED CROSS COUNTRY 15000
HIGHWAY 30000

SHIPPING DIMENSIONS

	WO/W	W/W
CU. FT.	1410	1510
SQ. FT.	201	211

BODY ASSY.
INSTALLATION CARGO BODY DWG. NO 8758001
CARGO BODY PART NO 7410065
CAB ASSY. PART NO 10883174

GENERAL
THIS VEHICLE IS USED TO TRANSPORT GENERAL CARGO OR PERSONNEL. THE CAB IS CANVAS COVERED, OPEN TYPE. THE BODY IS 14 FT. (168x88 IN. INSIDE) FLAT BED TYPE; STEEL CONSTRUCTION. SIDES AND TARPAULIN FRAMES ARE REMOVEABLE, 14 INCH SIDES. 19-3/8 INCH TAILGATE, 60 INCH FLOOR TO UNDERSIDE OF BOWS. COMPLETE WITH SIDE RACKS, TARPS AND TROOP SEATS.

BODY CARGO SPACE 550 CU. FT.
BODY INCLUDES SIX TOP BOWS WITH TARPAULINS AND END FLAPS. STEP ON TAILGATE FOR EASE OF ENTRANCE. FOUR AMBER REFLECTORS, TWO ON FRONT, ONE EACH SIDE FORWARD. FOUR RED REFLECTORS, TWO ON REAR, ONE EACH SIDE REARWARD.

ENGINE GASOLINE 6 CYL. 602 CU. IN.
COMP. RATIO 6.4 TO 1 4 7/8 BORE
5 3/8 STROKE BRAKE HP MAX. NET 196 @ 2800 RPM W/STD ACCESSORIES

FRONT SUSPENSION INSTALL. D.W.G. NO. 10871261
FRONT AXLE PART NO. 7346805
SHOCK ABSORBERS (2) PART NO. 7409617
SPRINGS, FRONT (2) PART NO. 7409345

REAR SUSPENSION INSTALL. DWG. NO. 10883209
REAR AXLE ASSY. (2) PART NO. 8327007
SPRINGS, REAR (2) PART NO. 7409613

WHEELS 7.5x20 (10) MS 53044-6

TIRES 11.00-20 (12) PLY (10) MS 35388-21
TREAD DESIGN NDCC TUBE (10) MS 35392-15
NUMBER OF SPARES - ONE

STEERING CAM AND LEVER PART NO. 8758369

BRAKES SERVICE
FRONT, HUB & DRUM ASSY. LH PART NO. 8758336
HUB & DRUM ASSY. RH PART NO. 8758337
REAR, HUB & DRUM ASSY. LH PART NO. 8758328
HUB & DRUM ASSY. RH PART NO. 8758329
DRUM SIZE - FRONT 16-1/2x5-1/2
REAR 16-1/2x5-1/2
ACTUATION - AIR/HYDRAULIC

BRAKES PARKING
DRUM SIZE - 14x3 MOUNTED ON REAR OF TRANSFER

ELECTRICAL SYSTEM
WATERPROOF AND RADIO SUPPRESSED
POTENTIAL - 24 VOLTS
BATTERIES - (2) 6 TN 12 VOLT MS 35000-4

STOP LIGHT TAILLIGHT (2) MS 51329-1

STOP LIGHT BLACKOUT (1) MS 51302-1

PERFORMANCE MILES PER GALLON 2.7
CRUISING RANGE, HIGHWAY 214 MILES
MAXIMUM SPEED 52 MPH @ 2800 RPM

WINCH CAPACITY 20,000 LBS. MS 51353

PINTLE CAPACITY 100,000 LBS. MS 51117-1

TIE DOWNS 16 (8) EACH SIDE

FORDING KIT PART NO. 5701843
FORDING DEPTH W/FORDING KIT 78 INCHES
FORDING DEPTH WO/FORDING KIT 30 INCHES

THIS VEHICLE IS DESIGNED IN TWO (2) MAJOR COMPONENTS, CHASSIS AND BODY. FOR DATA ON CHASSIS, SEE MS 51395.

THIS VEHICLE SHALL BE IN ACCORDANCE WITH REFERENCED DRAWINGS PART NO. 8358335 WITH WINCH, PART NO. 8358348 WITHOUT WINCH. COPIES OF WHICH MAY BE OBTAINED FROM ARMY TANK-AUTOMOTIVE CENTER, WARREN, MICHIGAN, ATTN: STANDARDIZATION BRANCH.

REVIEW ACTIVITIES: ARMY-EL; NAVY-MC
USER ACTIVITY: NAVY-DOCKS

APPROVED 8 FEBRUARY 1965 REVISED (A) FOR CHANGES SEE SHEET 1

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. MO (ATAC) / Other Cust / Navy-MC	TITLE: TRUCK, CARGO, 5 TON, 6 X 6, 179 INCH WHEELBASE, M54	MILITARY STANDARD MS 53087
PROCUREMENT SPECIFICATION MIL-T-740	SUPERSEDES:	SHEET 2

DD FORM 1 SEP 67 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:21Z
Check the source to verify that this is the current version before use.