
MS9810

FED. SUP CLASS
5306

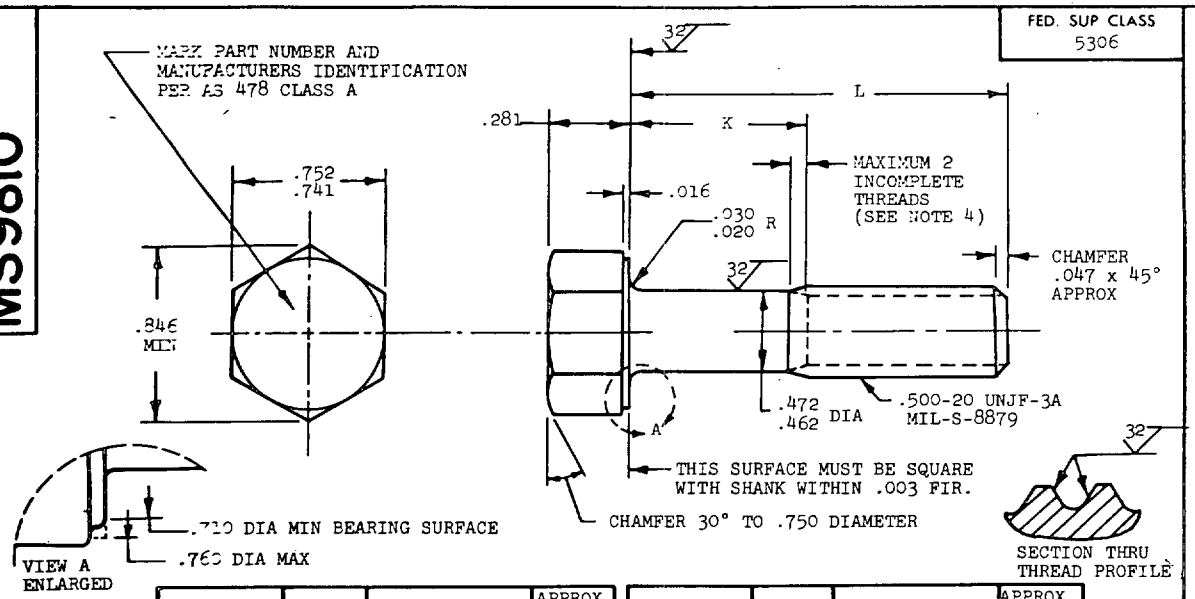

PART NUMBER	L	K	APPROX WEIGHT LB/100
MS9810-03	.750	.105- .125	7.44
MS9810-04	.812	.105- .125	7.74
MS9810-05	.875	.105- .125	8.04
MS9810-06	.938	.105- .125	8.34
MS9810-07	1.000	.105- .125	8.64
MS9810-08	1.062	.105- .125	8.94
MS9810-09	1.125	.105- .125	9.24
MS9810-10	1.188	.105- .125	9.54
MS9810-11	1.250	.105- .125	9.84
MS9810-12	1.312	.105- .125	10.15
MS9810-13	1.375	.105- .125	10.45
MS9810-14	1.438	.128- .188	10.75
MS9810-15	1.500	.190- .250	11.05
MS9810-16	1.562	.252- .312	11.34
MS9810-17	1.625	.315- .375	11.65
MS9810-18	1.688	.378- .438	11.95
MS9810-19	1.750	.440- .500	12.25
MS9810-20	1.812	.502- .562	12.55
MS9810-21	1.875	.565- .625	12.85
MS9810-22	1.938	.628- .688	13.15
MS9810-23	2.000	.690- .750	13.46
MS9810-24	2.125	.815- .875	14.05
MS9810-25	2.250	.940-1.000	14.66
MS9810-26	2.375	1.065-1.125	15.26
MS9810-27	2.500	1.190-1.250	15.87
MS9810-28	2.625	1.315-1.375	16.46
MS9810-29	2.750	1.440-1.500	17.06
MS9810-30	2.875	1.565-1.625	17.69
MS9810-31	3.000	1.690-1.750	18.27
MS9810-32	3.125	1.815-1.875	18.87
MS9810-33	3.250	1.940-2.000	19.47
MS9810-34	3.375	2.065-2.125	20.08
MS9810-35	3.500	2.190-2.250	20.68
MS9810-36	3.625	2.315-2.375	21.27
MS9810-37	3.750	2.440-2.500	21.88
MS9810-38	3.875	2.565-2.625	22.48
MS9810-39	4.000	2.690-2.750	23.09
MS9810-40	4.125	2.815-2.875	23.68
MS9810-41	4.250	2.940-3.000	24.28
MS9810-42	4.375	3.065-3.125	24.89
MS9810-43	4.500	3.190-3.250	25.49
MS9810-44	4.625	3.315-3.375	26.10
MS9810-45	4.750	3.440-3.500	26.69
MS9810-46	4.875	3.565-3.625	27.30
MS9810-47	5.000	3.690-3.750	27.90
MS9810-48	5.125	3.815-3.875	28.50
MS9810-49	5.250	3.940-4.000	29.10
MS9810-50	5.375	4.065-4.125	29.70
MS9810-51	5.500	4.190-4.250	30.31
MS9810-52	5.625	4.315-4.375	30.91
MS9810-53	5.750	4.440-4.500	31.51
MS9810-54	5.875	4.565-4.625	32.11
MS9810-55	6.000	4.690-4.750	32.71

1. SHANK SHALL BE STRAIGHT WITHIN .002 TOTAL PER INCH OF BOLT LENGTH.
2. THE CONCENTRICITY OF THREAD PD IN RELATION TO THE SHANK SHALL BE WITHIN .006 FIR.
3. THE CONCENTRICITY OF THE SHANK IN RELATION TO THE WASHER FACE DIAMETER AND HEXAGON SHALL BE WITHIN .023 FIR.
4. INCOMPLETE THREADS NOT TO ENTER FILLET.
5. MATERIAL: CORROSION RESISTANT STEEL AMS 5643.
6. HARDNESS: ROCKWELL C32-38.
7. MANUFACTURING SPECIFICATION: AMS 7474.
8. FLUORESCENT PENETRANT INSPECTION PER AMS 2645.
9. SURFACE TEXTURE: USAS B46.1-1962. UNLESS OTHERWISE SPECIFIED, SURFACES TO BE 125 MICROINCHES EXCEPT UPSET HEAD.
10. BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
11. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: LINEAR DIMENSIONS ±.010, ANGULAR DIMENSIONS ±5°.
12. DO NOT USE UNASSIGNED PART NUMBERS.

Ⓑ REINSTATED 31 OCT 84

AS & AMS ARE SOCIETY OF AUTOMOTIVE ENGINEERS, INC. PUBLICATIONS.
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE MILITARY SERVICES BY THE SAE AEROSPACE PART STANDARDS DIV.

APPROVED 11 MAR 70 REVISED Ⓐ 21 DEC 83 Ⓑ 31 OCT 84

Review activities:
AIR FORCE 82
DLA IS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

P.A. AS	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
Other Cust Ⓑ AV 99	Ⓑ	BOLT, MACHINE - HEXAGON HEAD, PD SHANK, AMS 5643, .500-20 UNJF-3A	MS9810
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:		PAGE 1 OF 1

DD FORM 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 5306-0883

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:26Z
Check the source to verify that this is the current version before use.

☆U.S. GOVERNMENT PRINTING OFFICE: 1985 — 505-038/20602