
MS 9834

PER MIP CLASS 3307

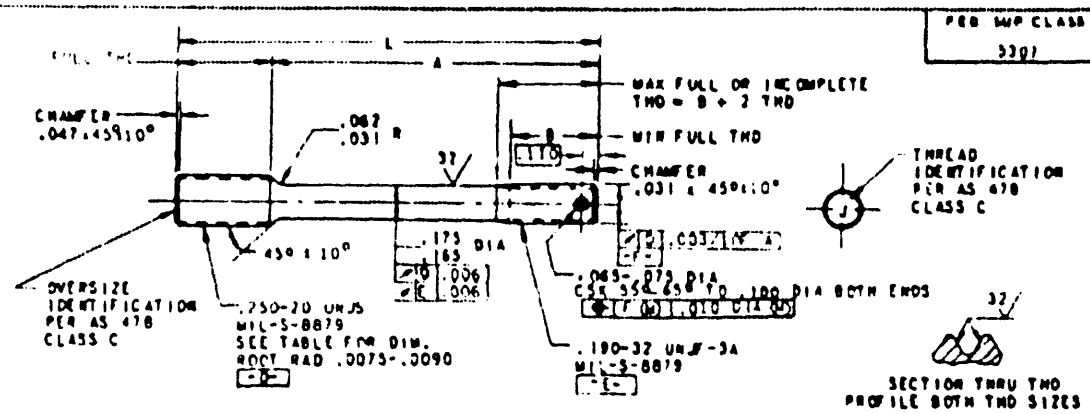

OVERSIZE IDENTIFICATION			STANDARD	+.003 (3)	+.006 (6)	+.009 (9)	+.012 (12)	STANDARD
MAJOR DIAMETER			.245-.250	.245-.250	.245-.250	.254-.259	.254-.259	
PD BEFORE PLATING			.2213-.2223	.2243-.2253	.2273-.2283	.2303-.2313	.2333-.2343	
PD AFTER PLATING			.2210-.2233	.2240-.2263	.2270-.2293	.2300-.2323	.2330-.2353	
PD LEAD THREAD			.2135-.2175	.2165-.2205	.2215-.2235	.2245-.2265	.2275-.2295	
MINOR DIA			.1933-.1980	.1963-.2010	.1993-.2040	.2023-.2070	.2053-.2100	APPROX WEIGHT LBS/100
L	A	B	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER	
1.000	.500	.375	MS9834-011	MS9834-012	MS9834-013	MS9834-014	MS9834-015	.85
1.062	.562	.438	MS9834-016	MS9834-017	MS9834-018	MS9834-019	MS9834-020	.89
1.125	.625	.500	MS9834-021	MS9834-022	MS9834-023	MS9834-024	MS9834-025	.93
1.188	.688	.500	MS9834-026	MS9834-027	MS9834-028	MS9834-029	MS9834-030	.97
1.250	.750	.500	MS9834-031	MS9834-032	MS9834-033	MS9834-034	MS9834-035	1.01
1.312	.812	.500	MS9834-036	MS9834-037	MS9834-038	MS9834-039	MS9834-040	1.05
1.375	.875	.500	MS9834-041	MS9834-042	MS9834-043	MS9834-044	MS9834-045	1.09
1.438	.938	.500	MS9834-046	MS9834-047	MS9834-048	MS9834-049	MS9834-050	1.13
1.500	1.000	.500	MS9834-051	MS9834-052	MS9834-053	MS9834-054	MS9834-055	1.17
1.562	1.062	.500	MS9834-056	MS9834-057	MS9834-058	MS9834-059	MS9834-060	1.21
1.625	1.125	.500	MS9834-061	MS9834-062	MS9834-063	MS9834-064	MS9834-065	1.25
1.688	1.188	.500	MS9834-066	MS9834-067	MS9834-068	MS9834-069	MS9834-070	1.29
1.750	1.250	.500	MS9834-071	MS9834-072	MS9834-073	MS9834-074	MS9834-075	1.33
1.812	1.312	.500	MS9834-076	MS9834-077	MS9834-078	MS9834-079	MS9834-080	1.37

1. MATERIAL: STEEL, AMS 6320, AMS 6322 OR AMS 6327
2. HARDNESS: ROCKWELL C28-32.
3. FINISH: CADMIUM PLATE AMS 2400. DIMENSIONS ARE AFTER PLATING EXCEPT WHERE SHOWN.
4. SURFACE TEXTURE: ANSI B46.1-1962. UNLESS OTHERWISE SPECIFIED, SURFACES TO BE 125 MICROINCHES.
5. DIMENSIONING AND TOLERANCING: ANSI Y14.5-1966.
6. MANUFACTURING SPECIFICATION: AMS 7456 EXCEPT THREAD FORM.
7. MAGNETIC PARTICLE INSPECTION PER AMS 2640 AFTER PLATING.
8. BREAK SHARP EDGES .003 - .015 UNLESS OTHERWISE SPECIFIED.
9. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: LINEAR DIMENSIONS ±.010.
10. MARK PART NUMBER AND MANUFACTURERS IDENTIFICATION ON CONTAINER.
11. DO NOT USE UNASSIGNED PART NUMBERS.

AS & AMS ARE SOCIETY OF AUTOMOTIVE ENGINEERS, INC. PUBLICATIONS.
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE MILITARY SERVICES BY THE SAE AEROSPACE PART STANDARDS DIV.

APPROVED 27 Aug 71 REVISED

P.A. Air Force - 11	TITLE	MILITARY STANDARD
Other Cust. Navy - AS	STUD-STEPPED, DRILLED, 2 DIA ENGAGEMENT, STEEL .250-20 UNJS x .190-32 UNJF	MS9834
PROCUREMENT SPECIFICATION AMS 7456	SUPERSEDES	SHEET 1 OF 1

DD FORM 672-1 (Electrical coordination)

☆ U.S. GOVERNMENT PRINTING OFFICE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:26Z
Check the source to verify that this is the current version before use.