[INCH–POUND]
A–A–59590/10B
22 June 2010
SUPERSEDING
A-A-59590/10A
12 August 2005


COMMERCIAL ITEM DESCRIPTION
SPECIFICATION SHEET

HOLDER, ELECTRICAL CARD, WEDGE RETAINERS, 3 PIECE, SCREW ACTUATED DRIVE, .220 X .220 INCH BODY SIZE, WITH VISUAL INDICATION AND SCREW RETENTION

The General Services Administration has authorized the use of this commercial item description for all federal agencies.

The complete requirements for procuring electrical card holders described herein shall consist of this document and the issue in effect of A–A–59590.

CLASSIFICATION/PART IDENTIFICATION NUMBER (PIN). This commercial item description (CID) specification sheet uses a classification system which is included in the Part Identification Number (PIN) as shown in the following example (see NOTES).

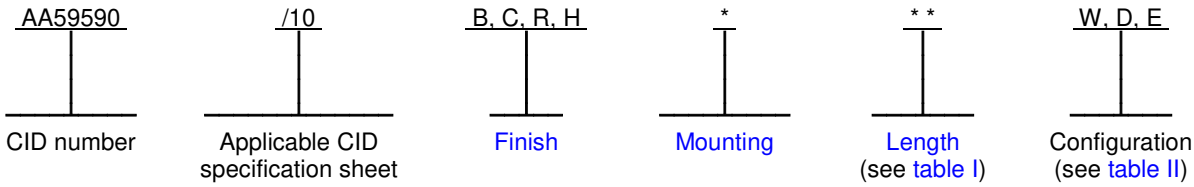

Example: AA59590/10BN38 is the PIN for a hard black anodize finished, 3.8 inch (96.5 mm) long card holder with visual lock indication and a retained actuating screw. The card holder contains no mounting holes for fasteners.

SALIENT CHARACTERISTICS.

Performance. Card holders shall hold the circuit card assembly firmly in its installed position. When the card holder is installed properly, it is capable of withstanding 60g/6ms of shock, 25 G-rms of vibration, and provides from 2 to 4 degrees C/W/inch thermal resistance transfer between the circuit card assembly and the heat sink surfaces. The screw retention feature is to prevent unintentional disassembly of the card holder.


Interface and physical dimensions. The card holders supplied to this CID specification sheet shall be as specified on figures 1, 2, 3, 4, 5 in table 1, and A–A–59590.

Actuating screw hex drive socket. The across flats dimension for the hex drive socket shall be as follows: .094 inch (2.38 mm) for mounting options "J", "N", "T", "R", "V", and "S" and 2.5 mm (0.98 inch) for mounting options "G" and "M".

Material. Unless otherwise specified herein, the card holder materials shall be as specified in A–A–59590.

Visual lock indicator (see figure 2). The visual lock indicator, intended to show when the card holder is in its relaxed unlocked state, shall be as specified in figure 2. When the card holder is in the unlocked (relaxed) state, the end of the actuating screw shall display a red band on the side of the screw. When the actuating screw on the card holder has been tightened (assembly expanded) so that the assembly is in the locked position, this red band shall be concealed.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:20Z
Check the source to verify that this is the current version before use.

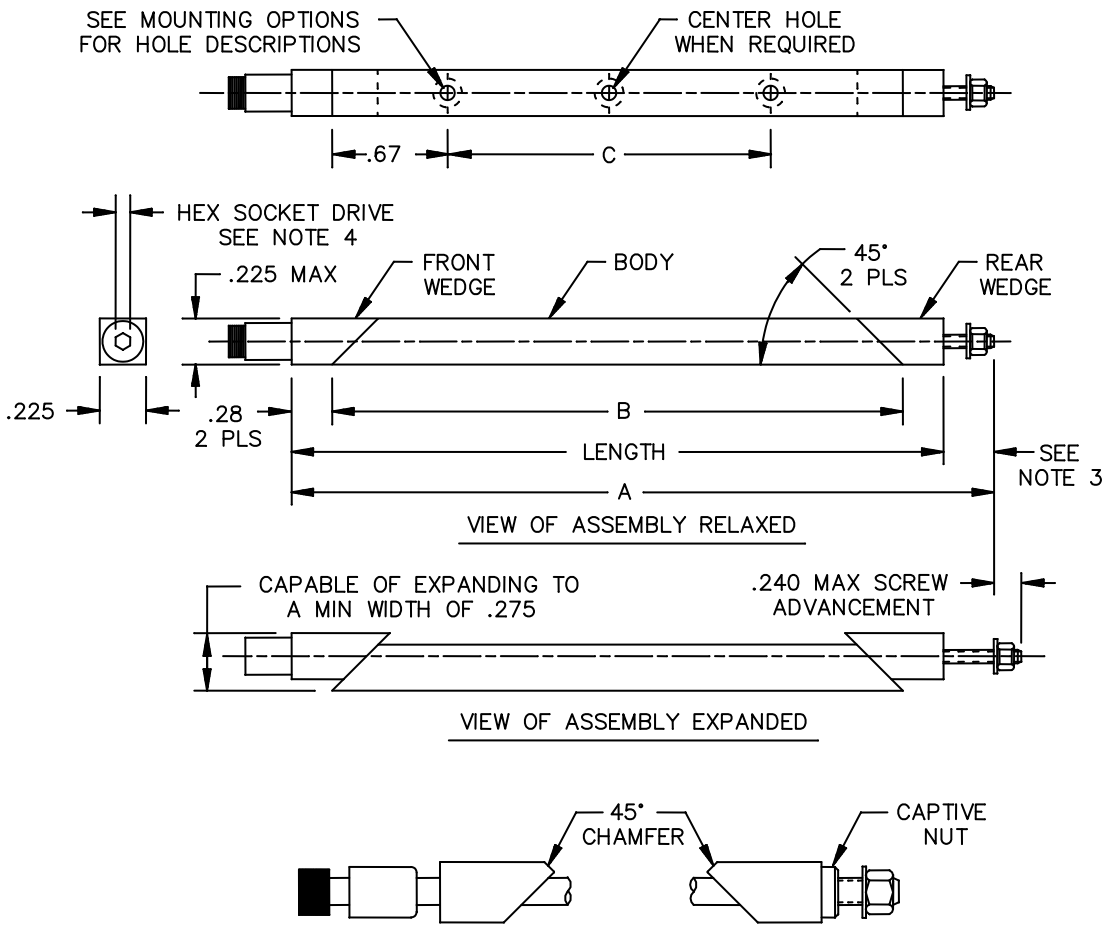

Inches	mm	Inches	mm	Inches	mm
.07	1.8	.225	5.72	.28	7.1
.220	5.59	.275	6.99	.67	17.0

NOTES:

1. Dimensions are in inches. Millimeters are given for general information only.
2. Unless otherwise specified, tolerances are ±.02 inch (0.5 mm) for two place decimals and ±.010 (0.25 mm) for three place decimals.
3. Dimension shall be .20 (5.1 mm) maximum on card holders of the base configuration or configuration "E" and .30 (7.6 mm) maximum on card holders of configuration "W" or "D".
4. The across flats dimension for hex drive socket shall be .094 inch (2.38 mm) for mounting options "J", "N", "T", "R", "V", and "S". The across flats dimension for hex drive socket shall be a metric dimension of 2.5 mm (0.98 inch) across flats for mounting options "G" and "M".
5. An alternate design for the front and rear wedge is used on CAGE 18915 parts. The overall length of the assembly will be reduced by approximately .030 inch (0.76 mm).

FIGURE 1. Relaxed and expanded dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:20Z
Check the source to verify that this is the current version before use.

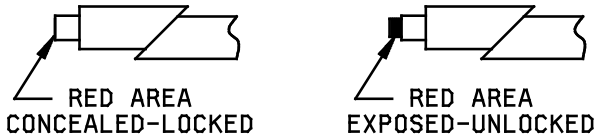


FIGURE 2. Visual lock

Screw retention (locknut, see figure 3). The screw retention feature intended to prevent unintentional disassembly of the card holder. The locknut shall be fabricated of a corrosion resistant material.



FIGURE 3. Screw retaining self-locking nut (corrosion resistant) details.

Nominal installation torque. When card holders are used in cold plate applications, the nominal installation torque of each card holder shall be as follows: 6 inch–pounds (0.68 N–m) for assemblies of the base configuration or configuration "W" and 8 inch–pounds (0.90 N–m) for assemblies of configurations "E" or "D".

Cold plate dimensions. Recommend cold plate slot width to accommodate the circuit card assembly with attached card holder is .250 inch (6.35 mm) plus the thickness of the printed board of the circuit card assembly (see A–A–59590).

Finish. The finish materials shall be as specified in A–A–59590. The finishes available for this CID specification sheet are as follows: "B" (black anodize), "C" (gold chemical film), "R" (clear chemical film), or "H" (hard black anodize).

Mounting. The mounting designators shall be as specified in A–A–59590. The mounting options available for this CID specification sheet are as follows: "J" (rivet mounting holes), "N" (no mounting holes), "T" or "R" (tapped 0-80 UNF 2B holes), "V" or "S" (tapped 2-56 UNC 2B holes), or "G" or "M" (tapped M2.5 x.45 metric holes). See table I and figure 1 for mounting hole spacing requirements. Card holders using mounting option "J" may be shipped unassembled.

Rivet mounting holes. The holes used for rivet mounting shall be .066 to .073 inch (1.68 to 1.85 mm) diameter through holes, countersunk 100 degrees by .140 inch (3.56 mm) diameter with an access/clearance counterbore hole of .156 inch (3.96 mm) diameter by .160 to .175 inch (4.06 to 4.45 mm) deep.

Rivets. This card holder uses rivet style A as specified in A–A–59590 when rivet mounting is used.

Mounting holes and locations (when required). Two mounting holes are required on card holders less than 5.30 inches (134.6 mm) in length. Three mounting holes are required on card holders 5.30 inches (134.6 mm) or greater in length. The third mounting hole shall be centered on the mounting body. See figure 1 and table I for mounting hole locations and spacing requirements.

Length, expanded, and relaxed dimensions. The length, expanded, and relaxed dimensions shall be as specified on figure 1. The length designator shall be as specified in A–A–59590 and the available lengths for this CID specification sheet are listed in table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:20Z
Check the source to verify that this is the current version before use.

TABLE I. Additional assembly dimensions (see figure 1). 1/

PIN length designator	Dimension "LENGTH" ±.02 (0.5)	Dimension "A" (maximum)	Dimension "B" ±.03 (0.8)	Dimension "C" ±.005 (0.13)
18	1.8 (45.7)	2.20 (55.9)	1.24 (31.5)	.75 (19.1)
23	2.3 (58.4)	2.70 (68.6)	1.74 (44.2)	.40 (10.2)
28	2.8 (71.1)	3.20 (81.3)	2.24 (56.8)	.90 (22.9)
30	3.0 (76.2)	3.40 (86.4)	2.44 (62.0)	1.10 (27.9)
33	3.3 (83.8)	3.70 (94.0)	2.74 (69.6)	1.40 (35.6)
35	3.5 (88.9)	3.90 (99.1)	2.94 (74.7)	1.60 (40.6)
38	3.8 (96.5)	4.20 (106.7)	3.24 (82.3)	1.90 (48.3)
43	4.3 (109.2)	4.70 (119.4)	3.74 (95.0)	2.40 (61.0)
48	4.8 (121.9)	5.20 (132.1)	4.24 (107.7)	2.90 (73.7)
53	5.3 (134.6)	5.70 (144.8)	4.74 (120.4)	3.40 (86.4)
58	5.8 (147.3)	6.20 (157.5)	5.24 (133.1)	3.90 (99.1)
63	6.3 (160.0)	6.70 (170.2)	5.74 (145.8)	4.40 (111.8)
68	6.8 (172.7)	7.20 (182.9)	6.24 (158.5)	4.90 (124.5)
73	7.3 (185.4)	7.70 (195.6)	6.74 (171.2)	5.40 (137.2)
78	7.8 (198.1)	8.20 (208.3)	7.24 (183.9)	5.90 (149.9)
83	8.3 (210.8)	8.70 (221.0)	7.74 (196.6)	6.40 (162.6)
88	8.8 (223.5)	9.20 (233.7)	8.24 (209.3)	6.90 (175.3)

1/ Dimensions are in inches. Millimeters, in parenthesis, are given for information only.

Configuration. The configuration of a card holder shall be as specified in table II. The details of a particular configuration consist of those on figures 1, 2, 3, 4, and 5. Card holders not requiring the options described by table II shall leave the configuration position in the PIN blank.

TABLE II. Configurations.

Configuration	Applicable figures	Hardware options
---	1, 2, and 3	No added options
W	1, 2, 3 and 4	Lockwasher and flat washer
E	1, 2, 3 and 5	Screw self-locking element
D	1, 2, 3, 4 and 5	Lockwasher, flat washer and screw self-locking element

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:20Z
Check the source to verify that this is the current version before use.

Lockwasher and flat washer (see figure 4). A lockwasher and flat washer located under the screw head will provide for additional resistance to loosening from shock and vibration. Card holders requiring a lockwasher and flat washer shall include a suffix "W" in the PIN (see classification and notes).

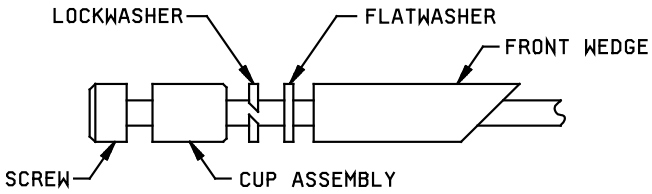


FIGURE 4. Lockwasher and flat washer details.

Screw self-locking element (see figure 5). The use of a screw self-locking element will provide prevailing torque for resistance to loosening from shock and vibration. Card holders requiring a screw self-locking element shall include a suffix "E" in the PIN (see classification and notes).



FIGURE 5. Screw self-locking element details.

Lockwasher, flat washer, and screw self-locking element. Card holders requiring a lockwasher, flat washer, and screw self-locking element configuration shall include a suffix "D" in the PIN (see classification and notes).

NOTES.

PIN. The PIN should be used for Government purposes to buy commercial products to this CID specification sheet. See the classification section for PIN format example.

Source of documents.

Commercial Item Description

A–A–59590 – Holder, Electrical Card, Wedge Retainers, 3 Piece, Screw Actuated Drive, General Requirements For.

(Copies of these documents are available online at https://assist.daps.dla.mil/quicksearch/ or https://assist.daps.dla.mil/ or from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111–5094.)

Ordering data. Ordering data is as specified in A–A–59590.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:20Z
Check the source to verify that this is the current version before use.

Commercial products. As part of the market analysis and research effort, this CID specification sheet was coordinated with the following manufacturers of commercial products. At the time of CID specification sheet preparation and coordination, these manufacturers were known to have commercial products that would meet the requirements of this CID specification sheet. (NOTE: This information should not be considered as a list of approved manufacturers or be used to restrict procurement to only the manufacturers shown.)

Manufacturer CAGE	Manufacturer name and address	Manufacturer contact information
18915	Birtcher – A Division of Pentair Electronic Packaging 7238 Trade Street San Diego, CA 92121–3410	Telephone: (858) 740–2400 Toll Free: (800) 854–7086 Facsimile: (858) 679–4555 (URL): www.birtcherproducts.com
52094	Calmark – A Division of Pentair Electronic Packaging 7238 Trade Street San Diego, CA 92121–3410	Telephone: (858) 740–2400 Toll Free: (800) 854–7086 Facsimile: (858) 740–2430 Electronic mail: sales@calmark.com URL: www.calmark.com
5BG68	Card Locks Unlimited, Inc. 2310 E. Orangethorpe Avenue Anaheim, CA 92806–1231	Telephone: (714) 738–6194 Facsimile: (714) 446–0119 E-mail: sales@clumfg.com URL: www.clumfg.com

Part number supersession data. This CID specification sheet PINS supersede the following manufacturer's part numbers as shown in table III. The CID PINs listed in table II are only for length designator "28". See table IV for CID PIN construction using other available lengths for this specification sheet. This information is being provided to assist in reducing proliferation in the Government inventory system.

TABLE III. Commercial part number supersession data.

PIN designator AA59590/10	Vendor similar designator or type part number 1/ CAGE 18915	Vendor similar designator or type part number 1/ CAGE 52094	Vendor similar designator or type part number 1/ CAGE 5BG68
BJ28	42VI–6–B–LN	VA230CR2.80HR	3230VBA–2.80HR
BN28	42VI–6–B–LN–A	VA230CR2.80R	3230VBA–2.80R
BT28	42VI–6–B–LN–T	VA230CR2.80T0R	3230VBA–2.80T0R
BV28	42VI–6–B–LN–S	VA230CR2.80T2R	3230VBA–2.80T2R
BG28	42VI–6–B–LN–M	MVA230CR2.80TM2.5R	3230MVBA–2.80TM2.5R
BJ28E	42VI–6–B–LN–L	VA230CR2.80HLR	3230VBA–2.80HLR
BN28E	42VI–6–B–LN–AL	VA230CR2.80LR	3230VBA–2.80LR
BT28E	42VI–6–B–LN–TL	VA230CR2.80T0LR	3230VBA–2.80T0LR
BV28E	42VI–6–B–LN–SL	VA230CR2.80T2LR	3230VBA–2.80T2LR
BG28E	42VI–6–B–LN–ML	MVA230CR2.80TM2.5LR	3230MVBA–2.80TM2.5LR

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:20Z
Check the source to verify that this is the current version before use.

TABLE III. Commercial part number supersession data – Continued.

PIN designator AA59590/10	Vendor similar designator or type part number 1/ CAGE 18915	Vendor similar designator or type part number 1/ CAGE 52094	Vendor similar designator or type part number 1/ CAGE 5BG68
BJ28W	42VI–6–B–LF–LN	WVA230CR2.80HR	3230VWBA–2.80HR
BN28W	42VI–6–B–LFLNA	WVA230CR2.80R	3230VWBA–2.80R
BT28W	42VI–6–B–LFLNT	WVA230CR2.80T0R	3230VWBA–2.80T0R
BV28W	42VI–6–B–LFLNS	WVA230CR2.80T2R	3230VWBA–2.80T2R
BG28W	42VI–6–B–LFLNM	MWVA230CR2.80TM2.5R	3230MVWBA–2.80TM2.5R
BJ28D	42VI–6–B–LFLNL	WVA230CR2.80HLR	3230VWBA–2.80HLR
BN28D	42VI–6–BLFLNAL	WVA230CR2.80LR	3230VWBA–2.80LR
BT28D	42VI–6–BLFLNTL	WVA230CR2.80T0LR	3230VWBA–2.80T0LR
BV28D	42VI–6–BLFLNSL	WVA230CR2.80T2LR	3230VWBA–2.80T2LR
BG28D	42VI–6–BLFLNML	MWVA230CR2.80TM2.5LR	3230MVWBA–2.80TM2.5LR
CJ28	42VI–6–LN	V230CR2.80HR	3230VCG–2.80HR
CN28	42VI–6–LN–A	V230CR2.80R	3230VCG–2.80R
CT28	42VI–6–LN–T	V230CR2.80T0R	3230VCG–2.80T0R
CV28	42VI–6–LN–S	V230CR2.80T2R	3230VCG–2.80T2R
CG28	42VI–6–LN–M	MV230CR2.80TM2.5R	3230VCG–2.80TM2.5R
CJ28E	42VI–6–LN–L	V230CR2.80HLR	3230VCG–2.80HLR
CN28E	42VI–6–LN–A–L	V230CR2.80LR	3230VCG–2.80LR
CT28E	42VI–6–LN–T–L	V230CR2.80T0LR	3230VCG–2.80T0LR
CV28E	42VI–6–LN–S–L	V230CR2.80T2LR	3230VCG–2.80T2LR
CG28E	42VI–6–LN–M–L	MV230CR2.80TM2.5LR	3230MVCG–2.80TM2.5LR
CJ28W	42VI–6–LF–LN	WV230CR2.80HR	3230VWCG–2.80HR
CN28W	42VI–6–LF–LN–A	WV230CR2.80R	3230VWCG–2.80R
CT28W	42VI–6–LF–LN–T	WV230CR2.80T0R	3230VWCG–2.80T0R
CV28W	42VI–6–LF–LN–S	WV230CR2.80T2R	3230VWCG–2.80T2R
CG28W	42VI–6–LF–LN–M	MWV230CR2.80TM2.5R	3230MVWCG–2.80TM2.5R
CJ28D	42VI–6–LF–LN–L	WV230CR2.80HLR	3230VWCG–2.80HLR
CN28D	42VI–6–LF–LNAL	WV230CR2.80LR	3230VWCG–2.80LR
CT28D	42VI–6–LF–LNTL	WV230CR2.80T0LR	3230VWCG–2.80T0LR
CV28D	42VI–6–LF–LNSL	WV230CR2.80T2LR	3230VWCG–2.80T2LR
CG28D	42VI–6–LF–LNML	MWV230CR2.80TM2.5LR	3230MVWCG–2.80TM2.5LR

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:20Z
Check the source to verify that this is the current version before use.

TABLE III. Commercial part number supersession data – Continued.

PIN designator AA59590/10	Vendor similar designator or type part number 1/ CAGE 18915	Vendor similar designator or type part number 1/ CAGE 52094	Vendor similar designator or type part number 1/ CAGE 5BG68
RJ28	42VI–6–CC–LN	VR230CR2.80HR	3230VCC–2.80HR
RN28	42VI–6–CC–LN–A	VR230CR2.80R	3230VCC–2.80R
RT28	42VI–6–CC–LN–T	VR230CR2.80T0R	3230VCC–2.80T0R
RV28	42VI–6–CC–LN–S	VR230CR2.80T2R	3230VCC–2.80T2R
RG28	42VI–6–CC–LN–M	MVR230CR2.80TM2.5R	3230MVCC–2.80TM2.5R
RJ28E	42VI–6–CC–LN–L	VR230CR2.80HLR	3230VCC–2.80HLR
RN28E	42VI–6–CC–LNAL	VR230CR2.80LR	3230VCC–2.80LR
RT28E	42VI–6–CC–LNTL	VR230CR2.80T0LR	3230VCC–2.80T0LR
RV28E	42VI–6–CC–LNSL	VR230CR2.80T2LR	3230VCC–2.80T2LR
RG28E	42VI–6–CC–LNML	MVR230CR2.80TM2.5LR	3230MVCC–2.80TM2.5LR
RJ28W	42VI–6–CC–LFLN	WVR230CR2.80HR	3230VWCC–2.80HR
RN28W	42VI–6–CCLFLNA	WVR230CR2.80R	3230VWCC–2.80R
RT28W	42VI–6–CCLFLNT	WVR230CR2.80T0R	3230VWCC–2.80T0R
RV28W	42VI–6–CCLFLNS	WVR230CR2.80T2R	3230VWCC–2.80T2R
RG28W	42VI–6–CCLFLNM	MWVR230CR2.80TM2.5R	3230MVWCC–2.80TM2.5R
RJ28D	42VI–6CCLFLNL	WVR230CR2.80HLR	3230VWCC–2.80HLR
RN28D	42VI–6CCLFLNAL	WVR230CR2.80LR	3230VWCC–2.80LR
RT28D	42VI–6CCLFLNTL	WVR230CR2.80T0LR	3230VWCC–2.80T0LR
RV28D	42VI–6CCLFLNSL	WVR230CR2.80T2LR	3230VWCC–2.80T2LR
RG28D	42VI–6CCLFLNML	MWVR230CR2.80TM2.5LR	3230MVWCC–2.80TM2.5LR
HJ28	42VI–6–B3–LN	VHA230CR2.80HR	3230VHA–2.80HR
HN28	42VI–6–B3–LN–A	VHA230CR2.80R	3230VHA–2.80R
HT28	42VI–6–B3–LN–T	VHA230CR2.80T0R	3230VHA–2.80T0R
HV28	42VI–6–B3–LN–S	VHA230CR2.80T2R	3230VHA–2.80T2R
HG28	42VI–6–B3–LN–M	MVHA230CR2.80TM2.5R	3230MVHA–2.80TM2.5R
HJ28E	42VI–6–B3–LN–L	VHA230CR2.80HLR	3230VHA–2.80HLR
HN28E	42VI–6–B3–LNAL	VHA230CR2.80LR	3230VHA–2.80LR
HT28E	42VI–6–B3–LNTL	VHA230CR2.80T0LR	3230VHA–2.80T0LR
HV28E	42VI–6–B3–LNSL	VHA230CR2.80T2LR	3230VHA–2.80T2LR
HG28E	42VI–6–B3–LNML	MVHA230CR2.80TM2.5LR	3230MVHA–2.80TM2.5LR

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:20Z
Check the source to verify that this is the current version before use.

TABLE III. Commercial part number supersession data – Continued.

PIN designator AA59590/10	Vendor similar designator or type part number 1/ CAGE 18915	Vendor similar designator or type part number 1/ CAGE 52094	Vendor similar designator or type part number 1/ CAGE 5BG68
HJ28W	42VI–6–B3–LFLN	WVHA230CR2.80HR	3230VWHA–2.80HR
HN28W	42VI–6–B3LFLNA	WVHA230CR2.80R	3230VWHA–2.80R
HT28W	42VI–6–B3LFLNT	WVHA230CR2.80T0R	3230VWHA–2.80T0R
HV28W	42VI–6–B3LFLNS	WVHA230CR2.80T2R	3230VWHA–2.80T2R
HG28W	42VI–6–B3LFLNM	MWVHA230CR2.80TM2.5R	3230MVWHA–2.80TM2.5R
HJ28D	42VI–6–B3LFLNL	WVHA230CR2.80HLR	3230VWHA–2.80HLR
HN28D	42VI–6B3LFLNAL	WVHA230CR2.80LR	3230VWHA–2.80LR
HT28D	42VI–6B3LFLNTL	WVHA230CR2.80T0LR	3230VWHA–2.80T0LR
HV28D	42VI–6B3LFLNSL	WVHA230CR2.80T2LR	3230VWHA–2.80T2LR
HG28D	42VI–6B3LFLNML	MWVHA230CR2.80TM2.5LR	3230MVWHA–2.80TM2.5LR

1/ The manufacturer's part number shall not be used for procurement to the requirements of this CID specification sheet. At the time of preparation of this CID specification sheet, the aforementioned commercial products were reviewed and could be replaced by the CID PIN shown. For actual part marking requirements, see the marking paragraph in A–A–59590.

TABLE IV. Example of PIN with available length designators.

PIN designator AA59590/10	Vendor similar designator or type part number 1/ 2/ CAGE 18915	Vendor similar designator or type part number 1/ 2/ CAGE 52094	Vendor similar designator or type part number 1/ 2/ CAGE 5BG68
BN18	42VI–4–B–LN–A		3230VBA–1.80T2LR
BN23	42VI–5–B–LN–A	VA230CR2.30T2LR	3230VBA–2.30T2LR
BN28	42VI–6–B–LN–A	VA230CR2.80T2LR	3230VBA–2.80T2LR
BN30	3/	VA230CR3.00T2LR	3230VBA–3.00T2LR
BN33	42VI–7–B–LN–A	VA230CR3.30T2LR	3230VBA–3.30T2LR
BN35	3/	VA230CR3.50T2LR	3230VBA–3.50T2LR
BN38	42VI–8–B–LN–A	VA230CR3.80T2LR	3230VBA–3.80T2LR
BN43	42VI–9–B–LN–A	VA230CR4.30T2LR	3230VBA–4.30T2LR
BN48	42VI–10–B–LN–A	VA230CR4.80T2LR	3230VBA–4.80T2LR
BN53	42VI–11–B–LN–A	VA230CR5.30ET2LR	3230VBA–5.30ET2LR
BN58	42VI–12–B–LN–A	VA230CR5.80ET2LR	3230VBA–5.80ET2LR
BN63	42VI–13–B–LN–A	VA230CR6.30ET2LR	3230VBA–6.30ET2LR

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:20Z
Check the source to verify that this is the current version before use.

TABLE IV. Example of PIN with available length designators – Continued.

PIN designator AA59590/10	Vendor similar designator or type part number 1/ 2/ CAGE 18915	Vendor similar designator or type part number 1/ 2/ CAGE 52094	Vendor similar designator or type part number 1/ 2/ CAGE 5BG68
BN68	42VI–14–B–LN–A	VA230CR6.80ET2LR	3230VBA–6.80ET2LR
BN73	42VI–15–B–LN–A	VA230CR7.30ET2LR	3230VBA–7.30ET2LR
BN78	42VI–16–B–LN–A	VA230CR7.80ET2LR	3230VBA–7.80ET2LR
BN83	42VI–17–B–LN–A	VA230CR8.30ET2LR	3230VBA–8.30ET2LR
BN88	42VI–18–B–LN–A	VA230CR8.80ET2LR	3230VBA–8.80ET2LR

1/ The manufacturer's part number shall not be used for procurement to the requirements of this CID specification sheet. At the time of preparation of this CID specification sheet, the aforementioned commercial products were reviewed and could be replaced by the CID PIN shown. For actual part marking requirements, see the marking paragraph in A–A–59590.
2/ Other lengths are available on request.
3/ Consult manufacturer for part number.

MILITARY INTERESTS:

Custodians:
Army – CR
Navy – EC
Air Force – 85
DLA – CC

Review Activities:
Army – MI
Air Force – 99

CIVIL AGENCY COORDINATING ACTIVITY:

GSA – FAS

Preparing Activity:
DLA – CC

Project 5998–2009–064

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.daps.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:20Z
Check the source to verify that this is the current version before use.