[INCH–POUND]
A–A–59590/11B
11 October 2010
SUPERSEDING
A-A-59590/11A
19 January 2006

COMMERCIAL ITEM DESCRIPTION
SPECIFICATION SHEET

HOLDER, ELECTRICAL CARD, WEDGE RETAINERS, 3 PIECE, SCREW ACTUATED DRIVE, .240 X .180 INCH BODY SIZE

The General Services Administration has authorized the use of this commercial item description for all federal agencies.

The complete requirements for procuring electrical card holders described herein shall consist of this document and the latest issue in effect of A–A–59590.

CLASSIFICATION/PART IDENTIFICATION NUMBER (PIN). This commercial item description (CID) specification sheet uses a classification system which is included in the Part Identification Number (PIN) as shown in the following example (see notes).

AA59590	/11	*	*	* *	W, D, E
CID number	Applicable CID specification sheet	Finish	Mounting	Length (see table I)	Configuration (see table II)

Example: AA59590/11BV38 is the PIN for a black anodize finished, 3.8 inch long card holder. The card holder also features two tapped mounting holes for use with 2–56 UNC 2B fasteners.

SALIENT CHARACTERISTICS.

Performance. Card holders shall hold the circuit card assembly firmly in its installed position. When the card holder is installed properly, it is capable of withstanding 60g/6ms of shock, 25 G-rms of vibration, and provides from 2 to 4 degrees C/W/inch thermal resistance transfer between the circuit card assembly and the heat sink surfaces.

Material. Unless otherwise specified herein, the card holder materials shall be as specified in A–A–59590.


Interface and physical dimensions. The card holders supplied to this CID specification sheet shall be as specified on figures 1, 2, 3, in table I, and A–A–59590.

Actuating screw hex drive socket. The across flats dimension for the hex drive socket shall be as follows: .094 inch (2.38 mm) for mounting options "J", "N", "T", "R", "V", and "S" and 2.5 mm (.098 inch) for mounting options "G" and "M".

Nominal installation torque. When card holders are used in cold plate applications, the nominal installation torque of each card holder shall be 4 to 6 inch-pounds (0.45 to 0.68 N-m).

Cold plate slot width dimensions (when applicable). The recommended cold plate slot width to accommodate the circuit card assembly with attached card holder is .210 inch (5.33 mm) plus the thickness of the printed board of the circuit card assembly (see A–A–59590).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:19Z
Check the source to verify that this is the current version before use.

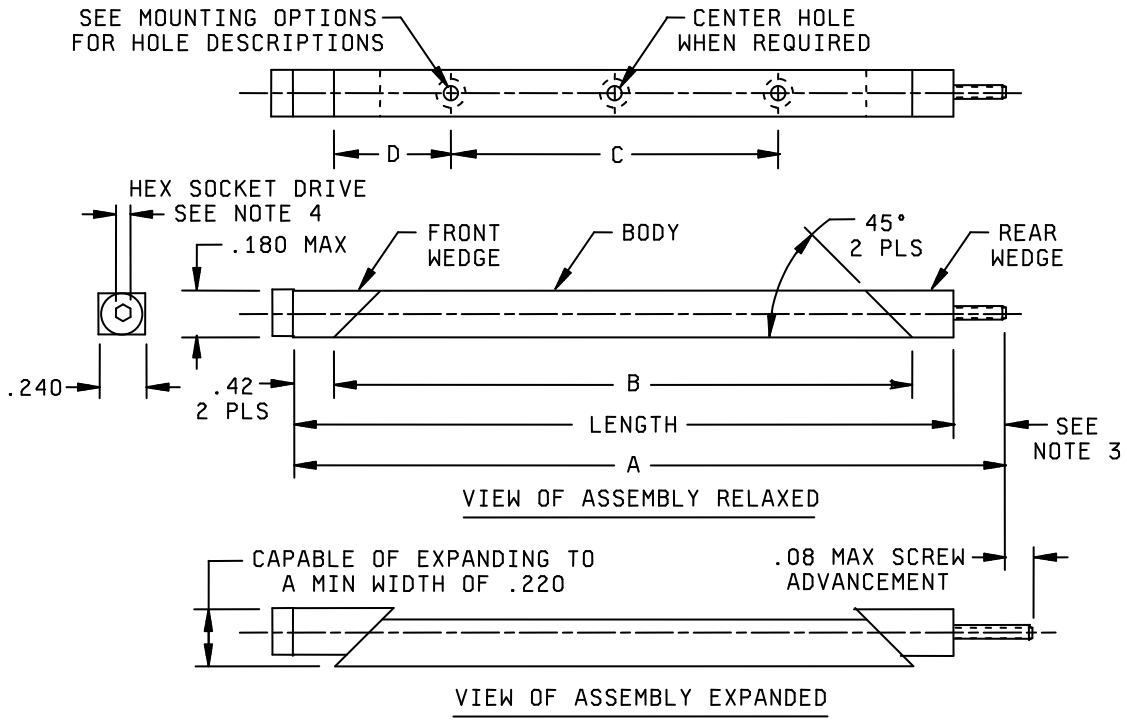

Inches	mm	Inches	mm	Inches	mm
.08	2.0	.220	5.59	.42	10.7
.180	4.57	.240	6.09		

NOTES:

1. Dimensions are in inches. Millimeters are given for general information only.
2. Unless otherwise specified, tolerances are ±.02 inch (0.5 mm) for two place decimals and ±.010 inch (0.25 mm) for three place decimals.
3. Dimension shall be .20 inch (5.1 mm) maximum on card holders without option "W" or "D" and .30 inch (7.6 mm) maximum on card holders with option "W" or "D".
4. The across flats dimension for hex drive socket shall be .094 inch (2.38 mm) for mounting options "J", "K", "N", "T", "R", "V", and "S". The across flats dimension for hex drive socket shall be a metric dimension of 2.5 mm (.098 inch) across flats for mounting options "G" and "M".

FIGURE 1. Relaxed and expanded dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:19Z
Check the source to verify that this is the current version before use.

Finish. The finish designator shall be as specified in A–A–59590. The finishes available for this CID specification sheet are as follows: "B" (black anodize), "C" (gold chemical film), "E" (electroless nickel), "H" (hard black anodize), "R" (clear chemical film).

Mounting. The mounting designators shall be as specified in A–A–59590. The mounting options available for this CID specification sheet are as follows: "J" (rivet mounting holes), "N" (no mounting holes), "T" or "R" (tapped 0–80 UNF 2B holes), "V" or "S" (tapped 2–56 UNC 2B holes), or "G" or "M" (tapped M2.5 x.45 metric holes). Card holders using mounting option "J" may be shipped unassembled. See figure 1 for mounting hole spacing requirements.

Mounting hole locations (when required). Two mounting holes are required on card holders less than 5.30 inches (134.6 mm) in length. Three mounting holes are required on card holders 5.30 inches (134.6 mm) or greater in length. The third mounting hole shall be centered on the mounting body. See figure 1 and table I for mounting hole locations and spacing requirements.

Rivet mounting holes. The holes used for rivet mounting shall be .066 to .073 inch (1.68 to 1.85 mm) diameter through holes, countersunk 100 degrees by .140 inch (3.56 mm) diameter with an access/clearance counterbore hole of .156 inch (3.96 mm) diameter by .130 to .140 inch (3.30 to 3.56 mm) deep.

Rivets. This card holder uses rivet style A as specified in A–A–59590 when rivet mounting is used.

Length, expanded, and relaxed dimensions. The length, expanded, and relaxed dimensions shall be as specified on figure 1. The length designator shall be as specified in A–A–59590 and the available lengths for this specification sheet are listed in table I.

TABLE I. Additional assembly dimensions (see figure 1). 1/

PIN length designator	Dimension "LENGTH" ±.02 (0.5)	Dimension "A" (maximum)		Dimension "B" ±.02 (0.5)	Dimension "C" ±.005 (0.13)	Dimension "D" ±.01 (0.3)
		Without options "W" or "D"	With options "W" or "D"			
18	1.8 (45.7)	2.00 (50.8)	2.10 (53.3)	.95 (24.1)	.40 (10.2)	.275 (6.99)
23	2.3 (58.4)	2.50 (63.5)	2.60 (66.0)	1.45 (36.8)	.70 (17.8)	.370 (9.39)
28	2.8 (71.1)	3.00 (76.2)	3.10 (78.7)	1.95 (49.5)	.90 (22.9)	.525 (13.3)
30	3.0 (76.2)	3.20 (81.3)	3.30 (83.8)	2.15 (54.6)	1.10 (27.9)	.525 (13.3)
33	3.3 (83.8)	3.50 (88.9)	3.6.0 (91.4)	2.45 (62.2)	1.40 (35.6)	.525 (13.3)
35	3.5 (88.9)	3.70 (94.0)	3.80 (96.5)	2.65 (67.3)	1.60 (40.6)	.525 (13.3)
38	3.8 (96.5)	4.00 (101.6)	4.10 (104.1)	2.95 (74.9)	1.90 (48.3)	.525 (13.3)
40	4.0 (101.6)	4.20 (106.4)	4.30 (109.2)	3.15 (80.0)	2.10 (53.3)	.525 (13.3)
43	4.3 (109.2)	4.50 (114.3)	4.60 (116.8)	3.45 (87.6)	2.40 (60.9)	.525 (13.3)
45	4.5 (114.3)	4.70 (119.4)	4.80 (121.9)	3.65 (92.7)	2.60 (66.0)	.525 (13.3)
48	4.8 (121.9)	5.00 (127.0)	5.10 (129.5)	3.95 (100.3)	2.90 (73.7)	.525 (13.3)
50	5.0 (127.0)	5.20 (132.1)	5.30 (134.6)	4.15 (105.4)	3.10 (78.7)	.525 (13.3)
53	5.3 (134.6)	5.50 (139.7)	5.60 (142.2)	4.45 (113.0)	3.40 (86.4)	.525 (13.3)
58	5.8 (147.3)	6.00 (152.4))	6.10 (154.9)	4.95 (125.7)	3.90 (99.1)	.525 (13.3)

1/ Dimensions are in inches. Millimeters, in parenthesis, are given for information only.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:19Z
Check the source to verify that this is the current version before use.

Configuration. The configuration of a card holder shall be as specified in table II. The details of a particular configuration consist of those on figures 1, 2, and 3. Card holders not requiring the options described by table II shall leave the configuration position in the PIN blank.

TABLE II. Configurations.

Configuration	Applicable figures	Hardware options
---	1	No added options
W	1 and 2	Lockwasher and flat washer
E	1 and 3	Screw self-locking element
D	1, 2, and 3	Lockwasher, flat washer and screw self-locking element

Lockwasher and flat washer (see figure 2). The use of a lockwasher and flat washer located under the screw head will provide additional resistance to loosening from shock and vibration. Card holders requiring a lockwasher and flat washer shall include a suffix "W" in the PIN (see classification and notes).

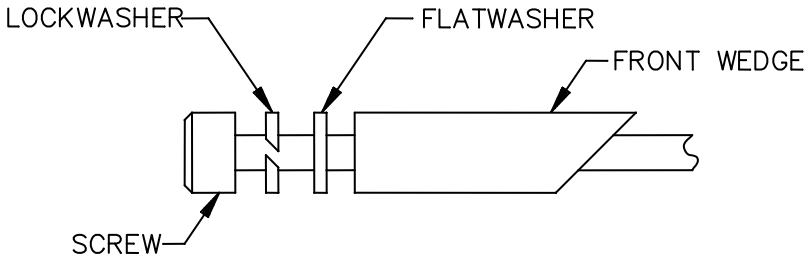


FIGURE 2. Lockwasher and flat washer details.

Screw self-locking element (see figure 3). The use of a screw self-locking element will provide prevailing torque for resistance to loosening from shock and vibration. Card holders requiring a screw self-locking element shall include a suffix "E" in the PIN (see classification and notes).

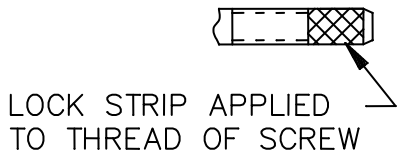


FIGURE 3. Screw self-locking element details.

Lockwasher, flat washer, and screw self-locking element. Card holders requiring a lockwasher, flat washer, and screw self-locking element configuration shall include a suffix "D" in the PIN (see classification and notes).

NOTES.

PIN. The PIN should be used for Government purposes to buy commercial products to this CID specification sheet. See the classification section for PIN format example.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:19Z
Check the source to verify that this is the current version before use.

Source of documents.

Commercial Item Description

A–A–59590 – Holder, Electrical Card, Wedge Retainers, 3 Piece, Screw Actuated Drive, General Requirements For.

(Copies of these documents are available online at https://assist.daps.dla.mil/quicksearch/ or https://assist.daps.dla.mil or from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111–5094.)

Ordering data. Ordering data is as specified in A–A–59590.

Commercial products. As part of the market analysis and research effort, this CID specification sheet was coordinated with the following manufacturers of commercial products. At the time of CID specification sheet preparation and coordination, these manufacturers were known to have commercial products that would meet the requirements of this CID specification sheet. (NOTE: This information should not be considered as a list of approved manufacturers or be used to restrict procurement to only the manufacturers shown.)

Manufacturer CAGE	Manufacturer name and address	Manufacturer contact information
18915	Birtcher A Division of Pentair Electronic Packaging 7328 Trade Street San Diego, CA 92121–3410	Telephone: (858) 740–2400 Toll Free: (800) 854–7086 Facsimile: (858) 740–2430 Electronic mail: (URL): www.birtcherproducts.com
61081	Calmark A Division of Pentair Electronic Packaging 7328 Trade Street San Diego, CA 92121–3410	Telephone: (858) 740–2400 Toll Free: (800) 854–7086 Facsimile: (858) 740–2430 Electronic mail: sales@calmark.com URL: www.calmark.com
5BG68	Card Locks Unlimited, Inc. 2310 E. Orangethorpe Avenue Anaheim, CA 92806–1231	Telephone: (714) 738–6194 Facsimile: (714) 446–0119 E-mail: sales@clumfg.com URL: www.clumfg.com

Part number supersession data. This CID specification sheet PINs supersede the following manufacturer's part numbers in table III and on DESC Drawing 84103 (table IV) as shown. The CID PINs listed in table II are only for length designator "28". See table V for CID PIN construction using other available lengths for this specification sheet. This information is being provided to assist in reducing proliferation in the Government inventory system.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:19Z
Check the source to verify that this is the current version before use.

TABLE III. Commercial part number supersession data.

PIN designator AA59590/11	Vendor similar designator or type part number 1/ CAGE 18915	Vendor similar designator or type part number 1/ CAGE 61081	Vendor similar designator or type part number 1/ CAGE 5BG68
BJ28	41–6–B	A240–2.80H	3240BA–2.80H
BN28	41–6–B–A	A240–2.80	3240BA–2.80
BT28	41–6–B–T	A240–2.80T0	3240BA–2.80T0
BV28	41–6–B–S	A240–2.80T2	3240BA–2.80T2
BG28	41–6–B–M	MA240–2.80TM2.5	3240MBA–2.80TM2.5
BJ28E	41–6–B–L	A240–2.80HL	3240BA–2.80HL
BN28E	41–6–B–A–L	A240–2.80L	3240BA–2.80L
BT28E	41–6–B–T–L	A240–2.80T0L	3240BA–2.80T0L
BV28E	41–6–B–S–L	A240–2.80T2L	3240BA–2.80T2L
BG28E	41–6–B–M–L	MA240–2.80TM2.5L	3240MBA–2.80TM2.5L
BJ28W	41–6–B–LF	WA240–2.80H	3240WBA–2.80H
BN28W	41–6–B–LF–A	WA240–2.80	3240WBA–2.80
BT28W	41–6–B–LF–T	WA240–2.80T0	3240WBA–2.80T0
BV28W	41–6–B–LF–S	WA240–2.80T2	3240WBA–2.80T2
BG28W	41–6–B–LF–M	MWA240–2.80TM2.5	3240MWBA–2.80TM2.5
BJ28D	41–6–B–LF–L	WA240–2.80HL	3240WBA–2.80HL
BN28D	41–6–B–LF–A–L	WA240–2.80L	3240WBA–2.80L
BT28D	41–6–B–LF–T–L	WA240–2.80T0L	3240WBA–2.80T0L
BV28D	41–6–B–LF–S–L	WA240–2.80T2L	3240WBA–2.80T2L
BG28D	41–6–B–LF–M–L	MWA240–2.80TM2.5L	3240MWBA–2.80TM2.5L
CJ28	41–6	240–2.80H	3240CG–2.80H
CN28	41–6–A	240–2.80	3240CG–2.80
CT28	41–6–T	240–2.80T0	3240CG–2.80T0
CV28	41–6–S	240–2.80T2	3240CG–2.80T2
CG28	41–6–M	M240–2.80TM2.5	3240MCG–2.80TM2.5
CJ28E	41–6–L	240–2.80HL	3240CG–2.80HL
CN28E	41–6–A–L	240–2.80L	3240CG–2.80L
CT28E	41–6–T–L	240–2.80T0L	3240CG–2.80T0L
CV28E	41–6–S–L	240–2.80T2L	3240CG–2.80T2L
CG28E	41–6–M–L	M240–2.80TM2.5L	3240MCG–2.80TM2.5L

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:19Z
Check the source to verify that this is the current version before use.

TABLE III. Commercial part number supersession data – Continued.

PIN designator AA59590/11	Vendor similar designator or type part number 1/ CAGE 18915	Vendor similar designator or type part number 1/ CAGE 61081	Vendor similar designator or type part number 1/ CAGE 5BG68
CJ28W	41–6–LF	W240–2.80H	3240WCG–2.80H
CN28W	41–6–LF–A	W240–2.80	3240WCG–2.80
CT28W	41–6–LF–T	W240–2.80T0	3240WCG–2.80T0
CV28W	41–6–LF–S	W240–2.80T2	3240WCG–2.80T2
CG28W	41–6–LF–M	MW240–2.80TM2.5	3240MWCG–2.80TM2.5
CJ28D	41–6–LF–L	W240–2.80HL	3240WCG–2.80HL
CN28D	41–6–LF–A–L	W240–2.80L	3240WCG–2.80L
CT28D	41–6–LF–T–L	W240–2.80T0L	3240WCG–2.80T0L
CV28D	41–6–LF–S–L	W240–2.80T2L	3240WCG–2.80T2L
CG28D	41–6–LF–M–L	MW240–2.80TM2.5L	3240MWCG–2.80TM2.5L
EJ28	41–6–EN	EN240–2.80H	3240EN–2.80H
EN28	41–6–EN–A	EN240–2.80	3240EN–2.80
ET28	41–6–EN–T	EN240–2.80T0	3240EN–2.80T0
EV28	41–6–EN–S	EN240–2.80T2	3240EN–2.80T2
EG28	41–6–EN–M	MEN240–2.80TM2.5	3240EN–2.80TM2.5
EJ28E	41–6–EN–L	EN240–2.80HL	3240EN–2.80HL
EN28E	41–6–EN–A–L	EN240–2.80L	3240EN–2.80L
ET28E	41–6–EN–T–L	EN240–2.80T0L	3240EN–2.80T0L
EV28E	41–6–EN–S–L	EN240–2.80T2L	3240EN–2.80T2L
EG28E	41–6–EN–M–L	MEN240–2.80TM2.5L	3240MEN–2.80TM2.5L
EJ28W	41–6–EN–LF	WEN240–2.80H	3240WEN–2.80H
EN28W	41–6–EN–LF–A	WEN240–2.80	3240WEN–2.80
ET28W	41–6–EN–LF–T	WEN240–2.80T0	3240WEN–2.80T0
EV28W	41–6–EN–LF–S	WEN240–2.80T2	3240WEN–2.80T2
EG28W	41–6–EN–LF–M	MWEN240–2.80TM2.5	3240MWEN–2.80TM2.5
EJ28D	41–6–EN–LF–L	WEN240–2.80HL	3240WEN–2.80HL
EN28D	41–6–EN–LF–A–L	WEN240–2.80L	3240WEN–2.80L
ET28D	41–6–EN–LF–T–L	WEN240–2.80T0L	3240WEN–2.80T0L
EV28D	41–6–EN–LF–S–L	WEN240–2.80T2L	3240WEN–2.80T2L
EG28D	41–6–EN–LF–M–L	MWEN240–2.80TM2.5L	3240MWEN–2.80TM2.5L

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:19Z
Check the source to verify that this is the current version before use.

TABLE III. Commercial part number supersession data – Continued.

PIN designator AA59590/11	Vendor similar designator or type part number 1/ CAGE 18915	Vendor similar designator or type part number 1/ CAGE 61081	Vendor similar designator or type part number 1/ CAGE 5BG68
HJ28	41–6–B3	HA240–2.80H	3240BH–2.80H
HN28	41–6–B3–A	HA240–2.80	3240BH–2.80
HT28	41–6–B3–T	HA240–2.80T0	3240BH–2.80T0
HV28	41–6–B3–S	HA240–2.80T2	3240BH–2.80T2
HG28	41–6–B3–M	MHA240–2.80TM2.5	3240MBH–2.80TM2.5
HJ28E	41–6–B3–L	HA240–2.80HL	3240BH–2.80HL
HN28E	41–6–B3–A–L	HA240–2.80L	3240BH–2.80L
HT28E	41–6–B3–T–L	HA240–2.80T0L	3240BH–2.80T0L
HV28E	41–6–B3–S–L	HA240–2.80T2L	3240BH–2.80T2L
HG28E	41–6–B3–M–L	MHA240–2.80TM2.5L	3240MBH–2.80TM2.5L
HJ28W	41–6–B3–LF	WHA240–2.80H	3240WBH–2.80H
HN28W	41–6–B3–LF–A	WHA240–2.80	3240WBH–2.80
HT28W	41–6–B3–LF–T	WHA240–2.80T0	3240WBH–2.80T0
HV28W	41–6–B3–LF–S	WHA240–2.80T2	3240WBH–2.80T2
HG28W	41–6–B3–LF–M	MWHA240–2.80TM2.5	3240MWBH–2.80TM2.5
HJ28D	41–6–B3–LF–L	WHA240–2.80HL	3240WBH–2.80HL
HN28D	41–6–B3–LF–A–L	WHA240–2.80L	3240WBH–2.80L
HT28D	41–6–B3–LF–T–L	WHA240–2.80T0L	3240WBH–2.80T0L
HV28D	41–6–B3–LF–S–L	WHA240–2.80T2L	3240WBH–2.80T2L
HG28D	41–6–B3–LF–M–L	MWHA240–2.80TM2.5L	3240MWBH–2.80TM2.5L
RJ28	41–6–CC	R240–2.80H	3240CC–2.80H
RN28	41–6–CC–A	R240–2.80	3240CC–2.80
RT28	41–6–CC–T	R240–2.80T0	3240CC–2.80T0
RV28	41–6–CC–S	R240–2.80T2	3240CC–2.80T2
RG28	41–6–CC–M	MR240–2.80TM2.5	3240MCC–2.80TM2.5
RJ28E	41–6–CC–L	R240–2.80HL	3240CC–2.80HL
RN28E	41–6–CC–A–L	R240–2.80L	3240CC–2.80L
RT28E	41–6–CC–T–L	R240–2.80T0L	3240CC–2.80T0L
RV28E	41–6–CC–S–L	R240–2.80T2L	3240CC–2.80T2L
RG28E	41–6–CC–M–L	MR240–2.80TM2.5L	3240MCC–2.80TM2.5L

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:19Z
Check the source to verify that this is the current version before use.

TABLE III. Commercial part number supersession data – Continued.

PIN designator AA59590/11	Vendor similar designator or type part number 1/ CAGE 18915	Vendor similar designator or type part number 1/ CAGE 61081	Vendor similar designator or type part number 1/ CAGE 5BG68
RJ28W	41–6–CC–LF	WR240–2.80H	3240WCC–2.80H
RN28W	41–6–CC–LF–A	WR240–2.80	3240WCC–2.80
RT28W	41–6–CC–LF–T	WR240–2.80T0	3240WCC–2.80T0
RV28W	41–6–CC–LF–S	WR240–2.80T2	3240WCC–2.80T2
RG28W	41–6–CC–LF–M	MWR240–2.80TM2.5	3240MWCC–2.80TM2.5
RJ28D	41–6–CC–LF–L	WR240–2.80HL	3240WCC–2.80HL
RN28D	41–6–CC–LF–A–L	WR240–2.80L	3240WCC–2.80L
RT28D	41–6–CC–LF–T–L	WR240–2.80T0L	3240WCC–2.80T0L
RV28D	41–6–CC–LF–S–L	WR240–2.80T2L	3240WCC–2.80T2L
RG28D	41–6–CC–LF–M–L	MWR240–2.80TM2.5L	3240MWCC–2.80TM2.5L

1/ The manufacturer's part number shall not be used for procurement to the requirements of this CID specification sheet. At the time of preparation of this CID specification sheet, the aforementioned commercial products were reviewed and could be replaced by the CID PIN shown. For actual part marking requirements, see the marking paragraph in A–A–59590.

TABLE IV. Supersession information.

Superseded (old) PIN in accordance with DESC Drawing 84103	Superseding (new) CID PIN	Superseded (old) PIN in accordance with DESC Drawing 84103	Superseding (new) CID PIN
84103–15B	AA59590/11BJ28W	84103–15C	AA59590/11CJ28W
84103–16B	AA59590/11BJ38W	84103–16C	AA59590/11CJ38W
84103–17B	AA59590/11BJ48W	84103–17C	AA59590/11CJ48W

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:19Z
Check the source to verify that this is the current version before use.

TABLE V. Example of PIN with available length designators.

PIN designator AA59590/11	Vendor similar designator or type part number 1/ 2/ CAGE 18915	Vendor similar designator or type part number 1/ 2/ CAGE 61081	Vendor similar designator or type part number 1/ 2/ CAGE 5BG68
BV18	41–4–B–S	A240–1191T2	3240BA–1.80T2
BV23	41–5–B–S	A240–2.30T2	3240BA–2.30T2
BV28	41–6–B–S	A240–2.80T2	3240BA–2.80T2
BV30	3/	A240–3.00T2	3240BA–3.00T2
BV33	41–7–B–S	A240–3.30T2	3240BA–3.30T2
BV35	3/	A240–3.50T2	3240BA–3.50T2
BV38	41–8–B–S	A240–3.80T2	3240BA–3.80T2
BV40	3/	A240–4.00T2	3240BA–4.00T2
BV43	41–9–B–S	A240–4.30T2	3240BA–4.30T2
BV45	3/	A240–4.50T2	3240BA–4.50T2
BV48	41–10–B–S	A240–4.80T2	3240BA–4.80T2
BV50	3/	A240–5.00T2	3240BA–5.00T2
BS53	41–11–B–S	A240–5.30ET2	3240BA–5.30ET2
BS58	41–12–B–S	A240–5.80ET2	3240BA–5.80ET2

1/ The manufacturer's part number shall not be used for procurement to the requirements of this CID specification sheet. At the time of preparation of this CID specification sheet, the aforementioned commercial products were reviewed and could be replaced by the CID PIN shown. For actual part marking requirements, see the marking paragraph in A–A–59590.
2/ Other lengths are available on request.
3/ Consult manufacturer for part number.

MILITARY INTERESTS:

Custodians:
Army – CR
Navy – EC
Air Force – 85
DLA – CC

Review activity:
Air Force – 99

CIVIL AGENCY COORDINATING ACTIVITY:

GSA – FAS

Preparing Activity:
DLA – CC

Project 5998–2010–021

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:19Z
Check the source to verify that this is the current version before use.