[INCH–POUND]
A−A−59590/17D
17 July 2022
SUPERSEDING
A−A−59590/17C
17 July 2017


COMMERCIAL ITEM DESCRIPTION
SPECIFICATION SHEET

HOLDER, ELECTRICAL CARD, WEDGE RETAINERS, 3 PIECE, SCREW ACTUATED DRIVE, .260 X .260 INCH BODY SIZE, WEDGE MOUNTING BODY

The General Services Administration has authorized the use of this commercial item description for all federal agencies.

The complete requirements for procuring electrical card holders described herein shall consist of this document and the latest issue in effect of A−A−59590.

CLASSIFICATION/PART IDENTIFICATION NUMBER (PIN). This commercial item description (CID) specification sheet uses a classification system which is included in the Part Identification Number (PIN) as shown in the following example (see notes).

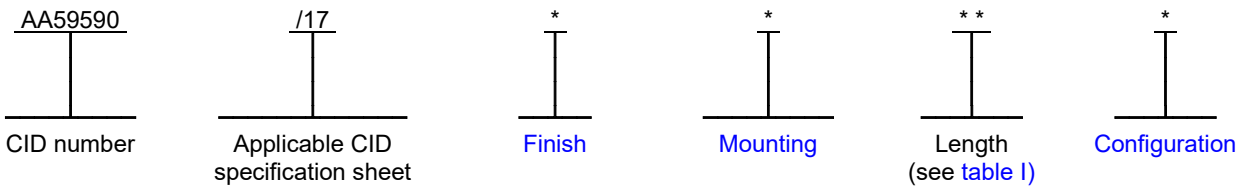

Example: AA59590/17EV28D is the PIN for a nickel plated, 2.8 inches (71 mm) long card holder with a flat washer, lockwasher, and screw self-locking element. The card holder also features two tapped mounting holes for use with metric M2.5 x 0.45 fasteners.

SALIENT CHARACTERISTICS.

Performance. Card holders shall hold the circuit card assembly firmly in its installed position and prevent loosening or movement as a result shock and vibration. It shall also provide a thermal transfer path from the circuit card assembly to the cold plate or heat sink surfaces.

Interface and physical dimensions. The card holders supplied to this CID specification sheet shall be as specified herein (see figures 1, 2, 3, and table I) and meet the general requirements of CID A−A−59590.

Material. Unless otherwise specified herein, the card holder materials shall be as specified in A−A−59590.


Actuating screw hex drive socket. The dimension for hex drive socket shall be .094 inch (2.39 mm) for mounting options "J", "N", "T" and "V". The dimension for hex drive socket shall be a metric dimension of 2.5 mm (.098 inch) across flats for mounting option "G".

Cold plate dimensions. The recommend cold plate slot width to accommodate the circuit card assembly with attached card holder is .300 inch (7.62 mm) plus the thickness of the printed board of the circuit card assembly (see A−A−59590).

Nominal installation torque. When card holders are used in cold plate applications, the nominal installation torque of each card holder shall be as follows: 10 inch-pounds (1.1 N-m) for assemblies using no options or option "W" and 12 inch-pounds (1.4 N-m) for assemblies using options "D" or "E".

AMSC N/A
DISTRIBUTION STATEMENT A. Approved for public release. Distribution is unlimited.
FSC 5998

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:20Z
Check the source to verify that this is the current version before use.

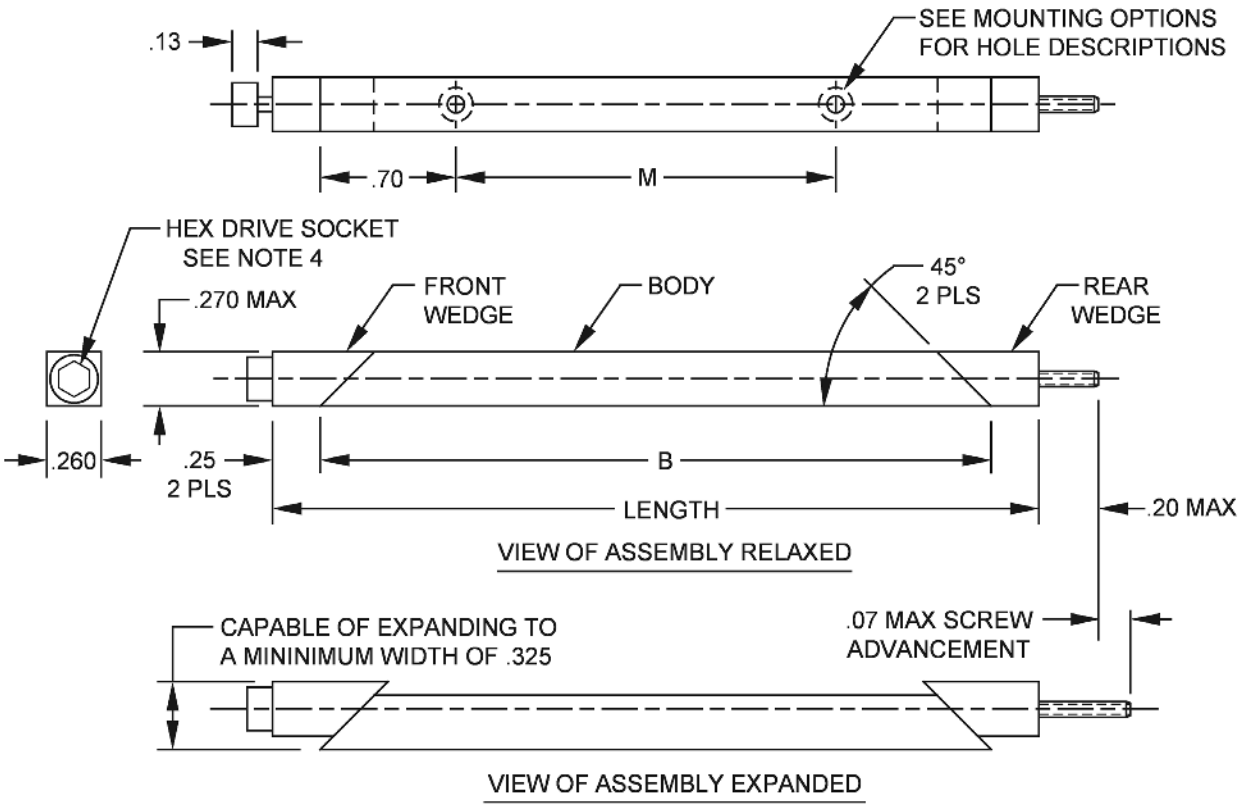

Inches	mm	Inches	mm	Inches	mm	Inches	mm
.07	1.8	.20	5.1	.260	6.6	.325	8.26
.13	3.3	.25	6.4	.270	6.86	.70	17.8

NOTES:

1. Dimensions are in inches. Millimeters are given for general information only.
2. Unless otherwise specified, tolerances are ±.02 inch (0.51 mm) for two place decimals and ±.010 inch (0.25 mm) for three place decimals.
3. The tolerance for the mounting hole spacing is ±.005 inches (0.13 mm).
4. The across flats dimension for hex drive socket shall be .094 inch (2.39 mm) for mounting options "J", "N", "T" and "V". The across flats dimension for hex drive socket shall be a metric dimension of 2.5 mm (.098 inch) across flats for mounting option "G".

FIGURE 1. Relaxed and expanded dimensions, basic configuration.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:20Z
Check the source to verify that this is the current version before use.

Finish. The finish designator shall be as specified in A−A−59590. The finishes available for this CID specification sheet are as follows: "B" (black anodize), "C" (gold chemical film), "E" (electroless nickel), "H" (hard black anodize), or "R" (clear chemical film).

Mounting. The mounting designators shall be as specified in A−A−59590. Except when using mounting option "N", two mounting holes are required on the card holders. The mounting options available for this CID specification sheet are as follows: "J" (rivet mounting holes), "N" (no mounting holes), "T" (tapped 0-80 UNF 2B holes), "V" (tapped 2-56 UNC 2B holes), or "G" (tapped M2.5 x.45 metric holes). See figure 1 and table I for mounting hole spacing requirements. Card holders using mounting option "J" may be shipped unassembled.

Counterbore holes (for rivet mounting). The holes used for rivet mounting shall be .068/.073 inch (1.73/1.85 mm) diameter, countersunk 100 degrees by .140 inch (3.56 mm) diameter through holes with an access/clearance counterbore of .156 inch (3.96 mm) diameter by .200 inch (5.08 mm) deep.

Rivets. This card holder uses rivet style A as specified in A−A−59590 when rivet mounting is used.

Length, expanded, and relaxed dimensions. The length designator shall be as specified in A−A−59590 and the lengths available for this CID specification sheet are listed in table I. The length, expanded, and relaxed dimensions shall be as specified on figure 1.

TABLE I. Assembly dimensions (see figure 1). 1/

PIN length designator	Dimension "LENGTH" ±.02 (0.5 mm)	Dimension "B" ±.03 (0.8 mm)	Dimension "M" ±.005 (0.13 mm)
28	2.8 (71 mm)	2.30 (58.4 mm)	.90 (22.9 mm)
38	3.8 (97 mm)	3.30 (83.8 mm)	1.90 (48.3 mm)
48	4.8 (122 mm)	4.30 (109.2 mm)	2.90 (73.7 mm)
58	5.8 (147 mm)	5.30 (134.6 mm)	3.90 (99.1 mm)

1/ Dimensions are in inches. Millimeters, in parenthesis, are given for general information only.

Configuration. The configuration of a card holder shall be as specified in table II. The details of a particular configuration consist of those on figure 1 and may include those on figures 2 and 3. The correct PIN configuration identifier for each option is listed in table II. Card holders not requiring the options described by table II shall leave the configuration position in the PIN blank.

TABLE II. Configuration.

Configuration	Applicable figures	Hardware added to basic configuration
	1	No changes from the base configuration
W	1 and 2	Lockwasher and flat washer
E	1 and 3	Screw self-locking element
D	1, 2, and 3	Lockwasher, flat washer, and screw self-locking element

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:20Z
Check the source to verify that this is the current version before use.

No added hardware. The base configuration of the card holder is as depicted by figure 1. Card holders requiring no added hardware options do not include a configuration identifier in the PIN (see classification, table I and notes section herein).

Lockwasher and flat washer (see figure 2). The use of a lockwasher and flat washer located under the screw head will provide for additional resistance to loosening of the card holder assembly from shock and vibration. Card holders requiring a lockwasher and flat washer shall include a suffix "W" in the PIN (see classification, table II and notes section herein).

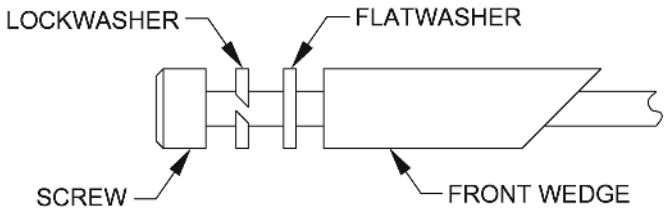


FIGURE 2. Lockwasher and flat washer details.

Screw self-locking element (see figure 3). The use of a screw self-locking element on the screw will provide a prevailing-torque for increased resistance to loosening of the card holder assembly from shock and vibration. Card holders requiring a screw self-locking element shall include a suffix "E" in the PIN (see classification, table II and notes section herein).

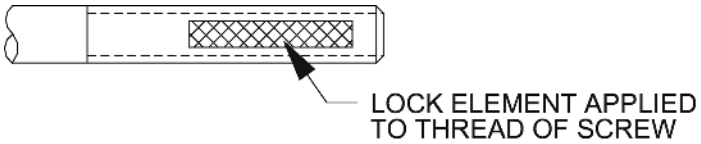


FIGURE 3. Screw self-locking element details.

Lockwasher, flat washer, and screw self-locking element. Card holders requiring a lockwasher, flat washer, and screw self-locking element option shall include a suffix "D" in the PIN (see classification, table II and notes section herein).

NOTES.

PIN. The PIN should be used for Government purposes to buy commercial products to this CID specification sheet. See the classification section for PIN format example.

Source of documents.

Commercial Item Description.

A−A−59590 − Holder, Electrical Card, Wedge Retainers, 3 Piece, Screw Actuated Drive, General Requirements For.

(Copies of these documents are available online at https://quicksearch.dla.mil.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:20Z
Check the source to verify that this is the current version before use.

Ordering data. Ordering data shall be as specified in A−A−59590.

Commercial products. As part of the market analysis and research effort, this CID specification sheet was coordinated with the following manufacturers of commercial products. At the time of CID specification sheet preparation and coordination, these manufacturers were known to have commercial products that would meet the requirements of this CID specification sheet. (NOTE: This information should not be considered as a list of approved manufacturers or be used to restrict procurement to only the manufacturers shown.)

Manufacturer CAGE	Manufacturer name and address	Manufacturer contact information
5BG68	American Circuit Card Retainers, Inc. 2310 E. Orangethorpe Avenue Anaheim, CA 92806−1231	Telephone: (714) 738−6194 Facsimile: (714) 446−0119 E-mail: sales@accrmfg.com URL: www.accrmfg.com
61081	Schroff, Inc. 7328 Trade Street San Diego, CA 92121−3410	Telephone: (858) 740−2400 Toll Free: (800) 854−7086 Facsimile: (858) 740−2430 E-mail: askschroff@nVent.com URL: https://schroff.nvent.com

Part number supersession data. These CID specification sheet PINs supersedes the following manufacturer's part numbers as shown in table III. The CID PINs listed in table III are only for length designator "28". See table IV for CID PIN construction using other available lengths for this specification sheet. This information is being provided to assist in reducing proliferation in the Government inventory system.

TABLE III. Commercial part number supersession data.

PIN designator AA59590/17	Vendor similar designator or type part number 1/ 2/	
	CAGE 61081	CAGE 5BG68
BJ28	A245−2.80H	3246BA−2.80H
BN28	A245−2.80	3246BA−2.80
BT28	A245−2.80T0	3246BA−2.80T0
BV28	A245−2.80T2	3246BA−2.80T2
BG28	MA245−2.80TM2.5	3246MBA−2.80TM2.5
BJ28W	WA245−2.80H	3246WBA−2.80H
BN28W	WA245−2.80	3246WBA−2.80
BT28W	WA245−2.80T0	3246WBA−2.80T0
BV28W	WA245−2.80T2	3246WBA−2.80T2
BG28W	MWA245−2.80TM2.5	3246MWBA−2.80TM2.5

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:20Z
Check the source to verify that this is the current version before use.

TABLE III. Commercial part number supersession data - Continued.

PIN designator AA59590/17	Vendor similar designator or type part number 1/ 2/	
	CAGE 61081	CAGE 5BG68
BJ28E	A245-2.80HL	3246BA-2.80HL
BN28E	A245-2.80L	3246BA-2.80L
BT28E	A245-2.80T0L	3246BA-2.80T0L
BV28E	A245-2.80T2L	3246BA-2.80T2L
BG28E	MA245-2.80TM2.5L	3246MBA-2.80TM2.5L
BJ28D	WA245-2.80HL	3246WBA-2.80HL
BN28D	WA245-2.80L	3246WBA-2.80L
BT28D	WA245-2.80T0L	3246WBA-2.80T0L
BV28D	WA245-2.80T2L	3246WBA-2.80T2L
BG28D	MWA245-2.80TM2.5L	3246MWBA-2.80TM2.5L
CJ28	245-2.80H	3246CG-2.80H
CN28	245-2.80	3246CG-2.80
CT28	245-2.80T0	3246CG-2.80T0
CV28	245-2.80T2	3246CG-2.80T2
CG28	M245-2.80TM2.5	3246MCG-2.80TM2.5
CJ28W	W245-2.80H	3245WCG-2.80H
CN28W	W245-2.80	3246WCG-2.80
CT28W	W245-2.80T0	3246WCG-2.80T0
CV28W	W245-2.80T2	3246WCG-2.80T2
CG28W	MW245-2.80TM2.5	3246MWCG-2.80TM2.5
CJ28E	245-2.80HL	3246CG-2.80HL
CN28E	245-2.80L	3246CG-2.80L
CT28E	245-2.80T0L	3246CG-2.80T0L
CV28E	245-2.80T2L	3246CG-2.80T2L
CG28E	M245-2.80TM2.5L	3246MCG-2.80TM2.5L
CJ28D	W245-2.80HL	3246WCG-2.80HL
CN28D	W245-2.80L	3246WCG-2.80L
CT28D	W245-2.80T0L	3246WCG-2.80T0L
CV28D	W245-2.80T2L	3246WCG-2.80T2L
CG28D	MW245-2.80TM2.5L	3246MWCG-2.80TM2.5L

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:20Z
Check the source to verify that this is the current version before use.

TABLE III. Commercial part number supersession data - Continued.

PIN designator AA59590/17	Vendor similar designator or type part number 1/ 2/	
	CAGE 61081	CAGE 5BG68
EJ28	EN245-2.80H	3246EN-2.80H
EN28	EN245-2.80	3246EN-2.80
ET28	EN245-2.80T0	3246EN-2.80T0
EV28	EN245-2.80T2	3246EN-2.80T2
EG28	MEN245-2.80TM2.5L	3246MEN-2.80TM2.5
EJ28W	WEN245-2.80H	3246WEN-2.80H
EN28W	WEN245-2.80	3246WEN-2.80
ET28W	WEN245-2.80T0	3246WEN-2.80T0
EV28W	WEN245-2.80T2	3246WEN-2.80T2
EG28W	MWEN245-2.80TM2.5	3246MWEN-2.80TM2.5
EJ28E	EN245-2.80HL	3246EN-2.80HL
EN28E	EN245-2.80L	3246EN-2.80L
ET28E	EN245-2.80T0L	3246EN-2.80T0L
EV28E	EN245-2.80T2L	3246EN-2.80T2L
EG28E	MEN245-2.80TM2.5L	3246MEN-2.80TM2.5L
EJ28D	WEN245-2.80HL	3246WEN-2.80HL
EN28D	WEN245-2.80L	3246WEN-2.80L
ET28D	WEN245-2.80T0L	3246WEN-2.80T0L
EV28D	WEN245-2.80T2L	3246WEN-2.80T2L
EG28D	MWEN245-2.80TM2.5L	3246MWEN-2.80TM2.5L
HJ28	HA245-2.80H	3246BH-2.80H
HN28	HA245-2.80	3246BH-2.80
HT28	HA245-2.80T0	3246BH-2.80T0
HV28	HA245-2.80T2	3246BH-2.80T2
HG28	MHA245-2.80TM2.5L	3246MBH-2.80TM2.5
HJ28W	WHA245-2.80H	3246WBH-2.80H
HN28W	WHA245-2.80	3246WBH-2.80
HT28W	WHA245-2.80T0	3246WBH-2.80T0
HV28W	WHA245-2.80T2	3246WBH-2.80T2
HG28W	MWHA245-2.80TM2.5L	3246MWBH-2.80TM2.5

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:20Z
Check the source to verify that this is the current version before use.

TABLE III. Commercial part number supersession data - Continued.

PIN designator AA59590/17	Vendor similar designator or type part number 1/ 2/	
	CAGE 61081	CAGE 5BG68
HJ28E	HA245-2.80HL	3246BH-2.80HL
HN28E	HA245-2.80L	3246BH-2.80L
HT28E	HA245-2.80T0L	3246BH-2.80T0L
HV28E	HA245-2.80T2L	3246BH-2.80T2L
HG28E	MHA245-2.80TM2.5L	3246MBH-2.80TM2.5L
HJ28D	WHA245-2.80HL	3246WBH-2.80HL
HN28D	WHA245-2.80L	3246WBH-2.80L
HT28D	WHA245-2.80T0L	3246WBH-2.80T0L
HV28D	WHA245-2.80T2L	3246WBH-2.80T2L
HG28D	MWHA245-2.80TM2.5L	3246MWBH-2.80TM2.5L
RJ28	R245-2.80HL	3246CC-2.80HL
RN28	R245-2.80L	3246CC-2.80L
RT28	R245-2.80T0L	3246CC-2.80T0L
RV28	R245-2.80T2L	3246CC-2.80T2L
RG28	MR245-2.80TM2.5L	3246MCC-2.80TM2.5L
RJ28W	WR245-2.80H	3246WCC-2.80H
RN28W	WR245-2.80	3246WCC-2.80
RT28W	WR245-2.80T0	3246WCC-2.80T0
RV28W	WR245-2.80T2	3246WCC-2.80T2
RG28W	MWR245-2.80TM2.5	3246MWCC-2.80TM2.5
RJ28E	WR245-2.80H	3246CC-2.80HL
RN28E	WR245-2.80	3246CC-2.80L
RT28E	WR245-2.80T0	3246CC-2.80T0L
RV28E	WR245-2.80T2	3246CC-2.80T2L
RG28E	MWR245-2.80TM2.5	3246MCC-2.80TM2.5L
RJ28D	WR245-2.80HL	3246WCC-2.80HL
RN28D	WR245-2.80L	3246WCC-2.80L
RT28D	WR245-2.80T0L	3246WCC-2.80T0L
RV28D	WR245-2.80T2L	3246WCC-2.80T2L
RG28D	MWR245-2.80TM2.5L	3246MWCC-2.80TM2.5L

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:20Z
Check the source to verify that this is the current version before use.

TABLE III. Commercial part number supersession data − Continued.

1/ The CID PINs listed are only for length designator "28".
2/ The manufacturer's part number shall not be used for procurement to the requirements of this CID specification sheet. At the time of preparation of this CID specification sheet, the aforementioned commercial products were reviewed and could be replaced by the CID PIN shown. For actual part marking requirements, see the marking paragraph in A−A−59590.

PIN length examples. The CID PINs listed in table IV are for all available standard card holder lengths for this specification sheet. However, only one specific finish, mounting and configuration are listed (see PIN example for a break-down of the codes).

TABLE IV. Example of PIN with available length designators.

PIN designator AA59590/17	Vendor similar designator or type part number 1/ 2/	
	CAGE 61081	CAGE 5BG68
EV28D	WEN245−2.80T2L	3246WEN−2.80T2L
EV38D	WEN245−3.80T2L	3246WEN−3.80T2L
EV48D	WEN245−4.80T2L	3246WEN−4.80T2L
EV58D	WEN245−5.80T2L	3246WEN−5.80T2L

1/ The manufacturer's part number shall not be used for procurement to the requirements of this CID specification sheet. At the time of preparation of this CID specification sheet, the aforementioned commercial products were reviewed and could be replaced by the CID PIN shown. For actual part marking requirements, see the marking paragraph in A−A−59590.
2/ Other lengths are available on request.

Changes from previous issue. The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

MILITARY INTERESTS:

Custodians:
Army − CR
Navy − EC
Air Force − 85
DLA − CC

CIVIL AGENCY COORDINATING ACTIVITY:

GSA − FAS

Preparing Activity:
DLA − CC

Project 5998−2022−027

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:20Z
Check the source to verify that this is the current version before use.