[INCH–POUND]
A–A–59590/25C
25 May 2018
SUPERSEDING
A–A–59590/25B
25 May 2013

COMMERCIAL ITEM DESCRIPTION
SPECIFICATION SHEET

# HOLDER, ELECTRICAL CARD, WEDGE RETAINERS, 3 PIECE, SCREW ACTUATED DRIVE, .225 X .260 INCH BODY SIZE, WEDGE MOUNTING BODY, WITH EJECTION ACTION AND VISUAL LOCK INDICATION

The General Services Administration has authorized the use of this commercial item description for all federal agencies.

The complete requirements for procuring electrical card holders described herein shall consist of this document and the latest issue in effect of A–A–59590.

CLASSIFICATION/PART IDENTIFICATION NUMBER (PIN). This commercial item description (CID) specification sheet uses a classification system which is included in the Part Identification Number (PIN) as shown in the following example (see notes).

| AA59590 | /25 | * | * | * * | W, D, E |
|---|---|---|---|---|---|
| CID number | Applicable CID specification sheet | Finish | Mounting | Length (see table I) | Configuration (see table II) |

Example: AA59590/25EJ58 is the PIN for an electroless nickel finished, 5.8 inches (147.3 mm) long card holder with both ejection action and visual lock indication. The card holder contains two counterbore holes for rivet mounting and may be shipped unassembled to allow for rivet installation.

SALIENT CHARACTERISTICS.

Interface and physical dimensions. The card holders supplied to this CID specification sheet shall be as specified herein (see figures 1, 2, 3, 4, 5, and table I) and meet the general requirements of A–A–59590.

Material. Unless otherwise specified herein, the card holder materials shall be as specified in A–A–59590.

Ejection action (see figure 2). Card holders shall have an ejection action feature that forces the circuit card assembly to disengage from its installed position. The ejection action shall allow for the initial ejection of the circuit card assembly from its installed position without damaging circuits, components, or the mating connector(s). The minimal amount of ejection distance shall be .25 inch (6.4 mm).


Visual lock indicator (see figure 3). Card holders shall have a visual indicator to show when the assembly is in its relaxed (unlocked) and expanded (locked) states. When the card holder is in the relaxed (unlocked) state, the actuating end of the screw shall display a red band on the side of the screw. When the actuating screw on the card holder has been tightened so that the assembly is in the expanded (locked) position, this red band shall be concealed.

Performance. Card holders shall hold the circuit card assembly it is attached to firmly in its installed position and prevent loosening or movement as a result of shock and vibration. The card holder shall also provide a thermal transfer path from the circuit card assembly to the cold plate or heat sink surfaces.

Actuating screw hex drive socket. The dimension for hex drive socket shall be as specified on figure 1.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:20Z
Check the source to verify that this is the current version before use.

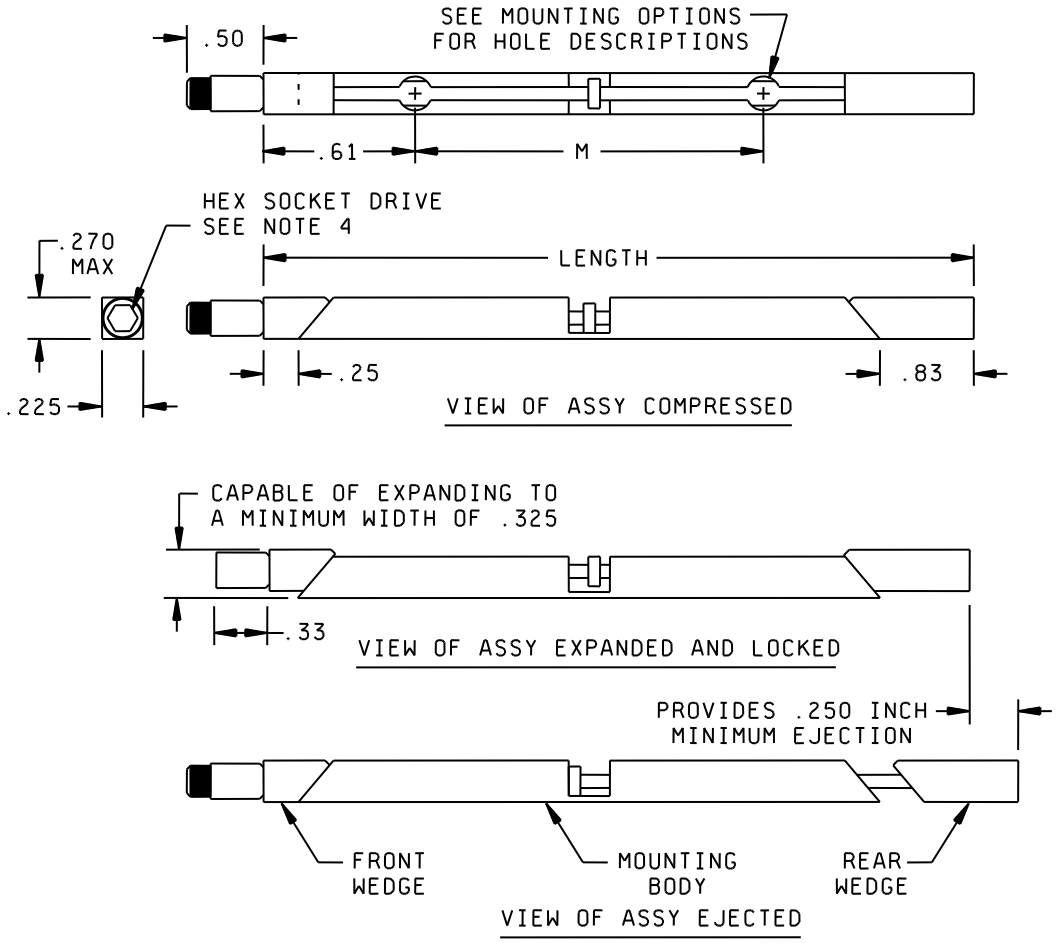


| Inches | mm | Inches | mm | Inches | mm | Inches | mm | Inches | mm |
|---|---|---|---|---|---|---|---|---|---|
| .225 | 5.72 | .25 | 6.4 | .270 | 6.86 | .33 | 8.4 | .61 | 15.5 |
| | | .250 | 6.35 | .325 | 8.26 | .50 | 12.7 | .83 | 21.1 |

NOTES:

1. Dimensions are in inches. Millimeters are given for general information only.
2. Unless otherwise specified, tolerances are ±.02 inch (0.51 mm) for two place decimals and ±.010 inch (0.25 mm) for three place decimals.
3. The tolerance for the mounting hole spacing is ±.005 inch (0.13 mm).
4. The across flats dimension for hex drive socket shall be .094 inch (2.39 mm) for mounting options "J", "N", "T", and "V". The across flats dimension for hex drive socket shall be a metric dimension of 2.5 mm (.098 inch) across flats for mounting option "G".

FIGURE 1. Relaxed and expanded dimensions.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:20Z
Check the source to verify that this is the current version before use.

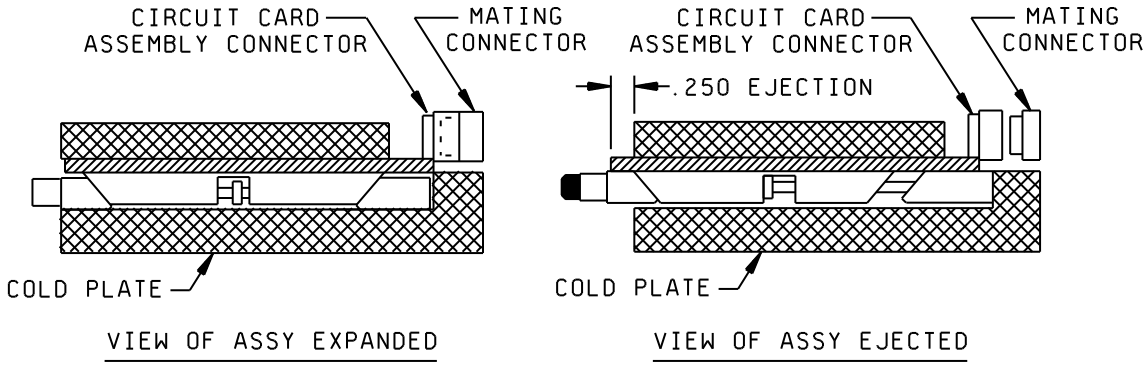



FIGURE 2. View of assembly installed and ejected.

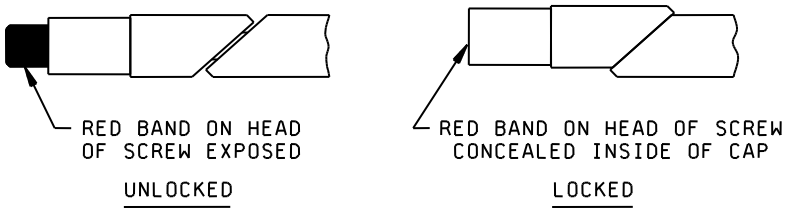



FIGURE 3. Visual lock indicator.

Nominal installation torque. When card holders are used in cold plate applications, the nominal installation torque of each card holder shall be as follows: 6 inch-pounds (0.68 N-m) for assemblies using no options or option “W” and 8 inch-pounds (0.9 N-m) for assemblies using options "D" or "E".

Cold plate slot width dimensions. The recommend cold plate slot width to accommodate the circuit card assembly with attached card holder is .300 inch (7.62 mm) plus the thickness of the printed board of the circuit card assembly (see A–A–59590).

Finish. The finish designator shall be as specified in A–A–59590. The wedge body finishes available for this CID specification sheet are as follows: "B" (black anodize), "C" (gold chemical film), "H" (hard black anodize), or "R" (clear chemical film).

Mounting options. The mounting designators shall be as specified in A–A–59590. Except when using mounting option "N", two mounting holes are required on the card holders. The mounting options available for this CID specification sheet are as follows: "J" (rivet mounting holes), "N" (no mounting holes), "T" (tapped 0–80 UNF 2B holes), "V" (tapped 2–56 UNC 2B holes), or "G" (tapped M2.5 x.45 metric holes). See figure 1 and table I for mounting hole spacing requirements. Card holders using mounting option "J" may be shipped unassembled.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:20Z
Check the source to verify that this is the current version before use.

Rivet mounting holes. The holes used for rivet mounting shall be .066/.073 inch (1.68/1.85 mm) diameter, countersunk 100 degrees by .140 inch (3.56 mm) diameter through holes with an access/clearance counterbore of .156 inch (3.96 mm) diameter by .200 inch (5.08 mm) deep.

Rivets. This card holder uses rivet style A as specified in A–A–59590 when rivet mounting is used.

Length, expanded, and relaxed dimensions. The length, expanded, and relaxed dimensions shall be as specified on figure 1. The length designator shall be as specified in A–A–59590 and the lengths available for this CID specification sheet are listed in table I.

TABLE I. Assembly dimensions (see figure 1). 1/

| PIN length designator | Dimension "LENGTH" ± .02 (0.5 mm) | Dimension "M" ± .005 (0.13 mm) |
|---|---|---|
| 28 | 2.8 (71 mm) | 1.00 (25.4 mm) |
| 32 | 3.2 (81 mm) | 1.40 (35.6 mm) |
| 38 | 3.8 (97 mm) | 2.00 (50.8 mm) |
| 48 | 4.8 (122 mm) | 3.00 (76.2 mm) |
| 64 | 6.4 (163 mm) | 4.60 (116.8 mm) |

1/ Dimensions are in inches. Millimeters, in parenthesis, are given for general information only.

Configuration. The configuration of a card holder shall be as specified in table II. The details of a particular configuration consist of those on figures 1 and 2, and may include those on figures 3 and 4. Card holders not requiring the options described by table II shall leave the configuration position in the PIN blank.

TABLE II. Configuration.

| Configuration designator | Applicable figures | Hardware options |
|---|---|---|
| | 1 and 2 | No added options |
| W | 1, 2, and 3 | Lockwasher and flat washer |
| E | 1, 2, and 4 | Screw self-locking element |
| D | 1, 2, 3, and 4 | Lockwasher, flat washer and screw self-locking element |

No added hardware. The base configuration of the card holder is as depicted by figure 1. Card holders requiring no added hardware options do not include a configuration identifier in the PIN (see classification, table II and notes section herein).

Lockwasher and flat washer (see figure 4). The use of a lockwasher and flat washer located under the screw head will provide for additional resistance to loosening of the card holder assembly from shock and vibration. Card holders requiring a lockwasher and flat washer option shall include a suffix "W" in the PIN (see classification, table II and notes section herein).



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:20Z
Check the source to verify that this is the current version before use.

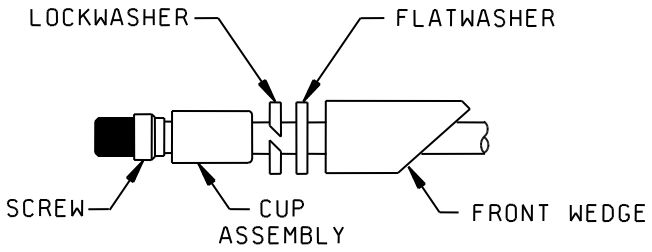



FIGURE 4. Lockwasher and flat washer details.

Screw self-locking element (see figure 5). The use of a screw self-locking element on the screw will provide a prevailing-torque for increased resistance to loosening of the card holder assembly from shock and vibration. The screw self-locking element shall be as specified in A–A–59590. Card holders requiring a screw self-locking element shall include configuration identifier "E" in the PIN (see classification, table II and notes section herein).

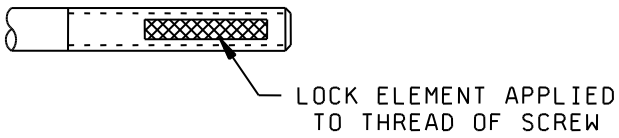



FIGURE 5. Screw self-locking element details.

Lockwasher, flat washer, and screw self-locking element. Card holders requiring a lockwasher, flat washer, and screw self-locking element option shall include a suffix "D" in the PIN (see classification, table II and notes section herein).

NOTES.

PIN. The PIN should be used for Government purposes to buy commercial products to this CID specification sheet. See the classification section for PIN format example.

Source of documents.

Commercial Item Description

A–A–59590 – Holder, Electrical Card, Wedge Retainers, 3 Piece, Screw Actuated Drive, General Requirements For.

(Copies of these documents are available online at http://quicksearch.dla.mil.)

Ordering data. Ordering data shall be as specified in A–A–59590.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:20Z
Check the source to verify that this is the current version before use.

Commercial products. As part of the market analysis and research effort, this CID specification sheet was coordinated with the following manufacturers of commercial products. At the time of CID specification sheet preparation and coordination, these manufacturers were known to have commercial products that would meet the requirements of this CID specification sheet. (NOTE: This information should not be considered as a list of approved manufacturers or be used to restrict procurement to only the manufacturers shown.)

| Manufacturer CAGE | Manufacturer name and address | Manufacturer contact information |
|---|---|---|
| 61081 (1) | Pentair Technical Products<br>(formerly Birtcher)<br>7328 Trade Street<br>San Diego, CA 92121–3410 | Telephone: (858) 740–2400<br>Facsimile: (858) 740–2430<br>E-mail: schroff.us@pentair.com<br>URL: https://schroff.nvent.com |
| 61081 (2) | Pentair Technical Products<br>(formerly Calmark)<br>7328 Trade Street<br>San Diego, CA 92121–3410 | |
| 5BG68 | American Circuit Card Retainers, Inc.<br>2310 E. Orangethorpe Avenue<br>Anaheim, CA 92806–1231 | Telephone: (714) 738–6194<br>Facsimile: (714) 446–0119<br>E-mail: sales@accrmfg.com<br>URL: www.accrmfg.com |

Part number supersession data. These CID specification sheet PINs supersedes the following manufacturer's part numbers as shown in table III. The CID PINs listed in table III are only for length designator "28". See table IV for CID PIN construction using other available lengths for this specification sheet. This information is being provided to assist in reducing proliferation in the Government inventory system.

TABLE III. Commercial part number supersession data.

| PIN designator AA59590/25 | Vendor similar designator or type part number 1/ 2/ | | |
|---|---|---|---|
| | CAGE 61081 (1) 3/ | CAGE 61081 (2) 4/ | CAGE 5BG68 |
| BJ28 | 45–5073–2.80–B | VEA225–2.80H | 3225VEBA–2.80H |
| BN28 | 45–5073–2.80–BA | VEA225–2.80 | 3225VEBA–2.80 |
| BT28 | 45–5073–2.80–BT | VEA225–2.80T0 | 3225VEBA–2.80T0 |
| BV28 | 45–5073–2.80–BS | VEA225–2.80T2 | 3225VEBA–2.80T2 |
| BG28 | 45–5073–2.80–BM | MVEA225–2.80TM2.5 | 3225VEMBA–2.80TM2.5 |
| B28E | 45–5073–2.80–BL | VEA225–2.80HL | 3225VEBA–2.80HL |
| BN28E | 45–5073–2.80–BAL | VEA225–2.80L | 3225VEBA–2.80L |
| BT28E | 45–5073–2.80–BTL | VEA225–2.80T0L | 3225VEBA–2.80T0L |
| BV28E | 45–5073–2.80–BSL | VEA225–2.80T2L | 3225VEBA–2.80T2L |
| BG28E | 45–5073–2.80–BML | MVEA225–2.80TM2.5L | 3225VEMBA–2.80TM2.5L |

See footnotes at end of table.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:20Z
Check the source to verify that this is the current version before use.

TABLE III. Commercial part number supersession data – Continued.

| PIN designator AA59590/25 | Vendor similar designator or type part number 1/ 2/ | | |
|---|---|---|---|
| | CAGE 61081 (1) 3/ | CAGE 61081 (2) 4/ | CAGE 5BG68 |
| BJ28W | 45–5074–2.80–B | WVEA225–2.80H | 3225VEWBA–2.80H |
| BN28W | 45–5074–2.80–BA | WVEA225–2.80 | 3225VEWBA–2.80 |
| BT28W | 45–5074–2.80–BT | WVEA225–2.80T0 | 3225VEWBA–2.80T0 |
| BV28W | 45–5074–2.80–BS | WVEA225–2.80T2 | 3225VEWBA–2.80T2 |
| BG28W | 45–5074–2.80–BM | MWVEA225–2.80TM2.5 | 3225VEWMBA–2.80TM2.5 |
| BJ28D | 45–5074–2.80–BL | WVEA225–2.80HL | 3225VEWBA–2.80HL |
| BN28D | 45–5074–2.80–BAL | WVEA225–2.80L | 3225VEWBA–2.80L |
| BT28D | 45–5074–2.80–BTL | WVEA225–2.80T0L | 3225VEWBA–2.80T0L |
| BV28D | 45–5074–2.80–BSL | WVEA225–2.80T2L | 3225VEWBA–2.80T2L |
| BG28D | 45–5074–2.80–BML | MWVEA225–2.80TM2.5L | 3225VEWMBA–2.80TM2.5L |
| CJ28 | 45–5073–2.80 | VE225–2.80H | 3225VECG–2.80H |
| CN28 | 45–5073–2.80–A | VE225–2.80 | 3225VECG–2.80 |
| CT28 | 45–5073–2.80–T | VE225–2.80T0 | 3225VECG–2.80T0 |
| CV28 | 45–5073–2.80–S | VE225–2.80T2 | 3225VECG–2.80T2 |
| CG28 | 45–5073–2.80–M | MVE225–2.80TM2.5 | 3225VEMCG–2.80TM2.5 |
| CJ28E | 45–5073–2.80–L | VE225–2.80HL | 3225VECG–2.80HL |
| CN28E | 45–5073–2.80–AL | VE225–2.80L | 3225VECG–2.80L |
| CT28E | 45–5073–2.80–TL | VE225–2.80T0L | 3225VECG–2.80T0L |
| CV28E | 45–5073–2.80–SL | VE225–2.80T2L | 3225VECG–2.80T2L |
| CG28E | 45–5073–2.80–ML | MVE225–2.80TM2.5L | 3225VEMCG–2.80TM2.5L |
| CJ28W | 45–5074–2.80 | WVE225–2.80H | 3225VEWCG–2.80H |
| CN28W | 45–5074–2.80–A | WVE225–2.80 | 3225VEWCG–2.80 |
| CT28W | 45–5074–2.80–T | WVE225–2.80T0 | 3225VEWCG–2.80T0 |
| CV28W | 45–5074–2.80–S | WVE225–2.80T2 | 3225VEWCG–2.80T2 |
| CG28W | 45–5074–2.80–M | MWVE225–2.80TM2.5 | 3225VEMWCG–2.80TM2.5 |
| CJ28D | 45–5074–2.80–L | WVE225–2.80HL | 3225VEWCG–2.80HL |
| CN28D | 45–5074–2.08–AL | WVE225–2.80L | 3225VEWCG–2.80L |
| CT28D | 45–5074–2.80–TL | WVE225–2.80T0L | 3225VEWCG–2.80T0L |
| CV28D | 45–5074–2.80–SL | WVE225–2.80T2L | 3225VEWCG–2.80T2L |
| CG28D | 45–5074–2.80–ML | MWV225–2.80TM2.5L | 3225VEMWCG–2.80TM2.5L |

See footnotes at end of table.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:20Z
Check the source to verify that this is the current version before use.

TABLE III. Commercial part number supersession data – Continued.

| PIN designator AA59590/25 | Vendor similar designator or type part number 1/ 2/ | | |
|---|---|---|---|
| | CAGE 61081 (1) 3/ | CAGE 61081 (2) 4/ | CAGE 5BG68 |
| EJ28 | 45–5073–2.80–EN | VEEN225–2.80H | 3225VEEN–2.80H |
| EN28 | 45–5073–2.80ENA | VEEN225–2.80 | 3225VEEN–2.80 |
| ET28 | 45–5073–2.80ENT | VEEN225–2.80T0 | 3225VEEN–2.80T0 |
| EV28 | 45–5073–2.80ENS | VEEN225–2.80T2 | 3225VEEN–2.80T2 |
| EG28 | 45–5073–2.80ENM | MVEEN225–2.80TM2.5 | 3225VEMEN–2.80TM2.5 |
| EJ28E | 45–5073–2.80ENL | VEEN225–2.80HL | 3225VEEN–2.80HL |
| EN28E | 45–5073–280ENAL | VEEN225–2.80L | 3225VEEN–2.80L |
| ET28E | 45–5073–280ENTL | VEEN225–2.80T0L | 3225VEEN–2.80T0L |
| EV28E | 45–5073–280ENSL | VEEN225–2.80T2L | 3225VEEN–2.80T2L |
| EG28E | 45–5073–280ENML | MVEEN225–2.80TM2.5L | 3225VEMEN–2.80TM2.5L |
| EJ28W | 45–5074–2.80–EN | WVEEN225–2.80H | 3225VEWEN–2.80H |
| EN28W | 45–5074–2.80ENA | WVEEN225–2.80 | 3225VEWEN–2.80 |
| ET28W | 45–5074–2.80ENT | WVEEN225–2.80T0 | 3225VEWEN–2.80T0 |
| EV28W | 45–5074–2.80ENS | WVEEN225–2.80T2 | 3225VEWEN–2.80T2 |
| EG28W | 45–5074–2.80ENM | MWVEEN225–2.80TM2.5 | 3225VEWMEN–2.80TM2.5 |
| EJ28D | 45–5074–2.80ENL | WVEEN225–2.80HL | 3225VEWEN–2.80HL |
| EN28D | 45–5074–280ENAL | WVEEN225–2.80L | 3225VEWEN–2.80L |
| ET28D | 45–5074–280ENTL | WVEEN225–2.80T0L | 3225VEWEN–2.80T0L |
| EV28D | 45–5074–280ENSL | WVEEN225–2.80T2L | 3225VEWEN–2.80T2L |
| EG28D | 45–5074–280ENML | MWVEEN225–2.80TM2.5L | 3225VEWMEN–2.80TM2.5L |
| HJ28 | 45–5073–2.80–B3 | VEHA225–2.80H | 3225VEBH–2.80H |
| HN28 | 45–5073–2.80B3A | VEHA225–2.80 | 3225VEBH–2.80 |
| HT28 | 45–5073–2.80B3T | VEHA225–2.80T0 | 3225VEBH–2.80T0 |
| HV28 | 45–5073–2.80B3S | VEHA225–2.80T2 | 3225VEBH–2.80T2 |
| HG28 | 45–5073–2.80B3M | MVEHA225–2.80TM2.5 | 3225VEMBH–2.80TM2.5 |
| HJ28E | 45–5073–2.80B3L | VEHA225–2.80HL | 3225VEBH–2.80HL |
| HN28E | 45–5073–280B3AL | VEHA225–2.80L | 3225VEBH–2.80L |
| HT28E | 45–5073–280B3TL | VEHA225–2.80T0L | 3225VEBH–2.80T0L |
| HV28E | 45–5073–280B3SL | VEHA225–2.80T2L | 3225VEBH–2.80T2L |
| HG28E | 45–5073–280B3ML | MVEHA225–2.80TM2.5L | 3225VEMBH–2.80TM2.5L |

See footnotes at end of table.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:20Z
Check the source to verify that this is the current version before use.

TABLE III. Commercial part number supersession data – Continued.

| PIN designator AA59590/25 | Vendor similar designator or type part number 1/ 2/ | | |
|---|---|---|---|
| | CAGE 61081 (1) 3/ | CAGE 61081 (2) 4/ | CAGE 5BG68 |
| HJ28W | 45–5074–2.80–B3 | WVEHA225–2.80H | 3225VEWBH–2.80H |
| HN28W | 45–5074–2.80B3A | WVEHA225–2.80 | 3225VEWBH–2.80 |
| HT28W | 45–5074–2.80B3T | WVEHA225–2.80T0 | 3225VEWBH–2.80T0 |
| HV28W | 45–5074–2.80B3S | WVEHA225–2.80T2 | 3225VEWBH–2.80T2 |
| HG28W | 45–5074–2.80B3M | MWVEHA225–2.80TM2.5 | 3225VEMWBH–2.80TM2.5 |
| HJ28D | 45–5074–2.80B3L | WVEHA225–2.80HL | 3225VEWBH–2.80HL |
| HN28D | 45–5074–280B3AL | WVEHA225–2.80L | 3225VEWBH–2.80L |
| HT28D | 45–5074–280B3TL | WVEHA225–2.80T0L | 3225VEWBH–2.80T0L |
| HV28D | 45–5074–280B3SL | WVEHA225–2.80T2L | 3225VEWBH–2.80T2L |
| HG28D | 45–5074–280B3ML | MWVEHA225–2.80TM2.5L | 3225VEMWBH–2.80TM2.5L |
| RJ28 | 45–5073–2.80–CC | VER225–2.80H | 3225VECC–2.80H |
| RN28 | 45–5073–2.80CCA | VER225–2.80 | 3225VECC–2.80 |
| RT28 | 45–5073–2.80CCT | VER225–2.80T0 | 3225VECC–2.80T0 |
| RV28 | 45–5073–2.80CCS | VER225–2.80T2 | 3225VECC–2.80T2 |
| RG28 | 45–5073–2.80CCM | MVER225–2.80TM2.5 | 3225VEMCC–2.80TM2.5 |
| RJ28E | 45–5073–2.80CCL | VER225–2.80HL | 3225VECC–2.80HL |
| RN28E | 45–5073–280CCAL | VER225–2.80L | 3225VECC–2.80L |
| RT28E | 45–5073–280CCTL | VER225–2.80T0L | 3225VECC–2.80T0L |
| RV28E | 45–5073–280CCSL | VER225–2.80T2L | 3225VECC–2.80T2L |
| RG28E | 45–5073–280CCML | MVER225–2.80TM2.5L | 3225VEMCC–2.80TM2.5L |
| RJ28W | 45–5074–2.80–CC | WVER225–2.80H | 3225VEWCC–2.80H |
| RN28W | 45–5074–2.80CCA | WVER225–2.80 | 3225VEWCC–2.80 |
| RT28W | 45–5074–2.80CCT | WVER225–2.80T0 | 3225VEWCC–2.80T0 |
| RV28W | 45–5074–2.80CCS | WVER225–2.80T2 | 3225VEWCC–2.80T2 |
| RG28W | 45–5074–2.80CCM | MWVER225–2.80TM2.5 | 3225VEMWCC–2.80TM2.5 |
| RJ28D | 45–5074–2.80B3L | WVER225–2.80HL | 3225VEWCC–2.80HL |
| RN28D | 45–5074–280B3AL | WVER225–2.80L | 3225VEWCC–2.80L |
| RT28D | 45–5074–280B3TL | WVER225–2.80T0L | 3225VEWCC–2.80T0L |
| RV28D | 45–5074–280B3SL | WVER225–2.80T2L | 3225VEWCC–2.80T2L |
| RG28D | 45–5074–280B3ML | MWVER225–2.80TM2.5L | 3225VEMWCC–2.80TM2.5L |

See footnotes at end of table.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:20Z
Check the source to verify that this is the current version before use.

TABLE III. Commercial part number supersession data – Continued.

1/ The CID PINs listed are only for length designator "28".
2/ The manufacturer's part number shall not be used for procurement to the requirements of this CID specification sheet. At the time of preparation of this CID specification sheet, the aforementioned commercial products were reviewed and could be replaced by the CID PIN shown. For actual part marking requirements, see the marking paragraph in A–A–59590.
3/ PINs listed are for CAGE 61081 (1).
4/ PINs listed are for CAGE 61081 (2).

TABLE IV. Example of PIN with available length designators.

| PIN designator AA59590/25 | Vendor similar designator or type part number 1/ 2/ | | |
|---|---|---|---|
| | CAGE 61081 (1) 3/ | CAGE 61081 (2) 4/ | CAGE 5BG68 |
| EJ28 | 45–5073–2.80–EN | VEEN225–2.80H | 3225VEEN–2.80H |
| EJ32 | 45–5073–3.20–EN | VEEN225–3.20H | 3225VEEN–3.20H |
| EJ38 | 45–5073–3.80–EN | VEEN225–3.80H | 3225VEEN–3.80H |
| EJ48 | 45–5073–4.80–EN | VEEN225–4.80H | 3225VEEN–4.80H |
| EJ64 | 45–5073–6.40–EN | VEEN225–6.40H | 3225VEEN–6.40H |

1/ The manufacturer's part number shall not be used for procurement to the requirements of this CID specification sheet. At the time of preparation of this CID specification sheet, the aforementioned commercial products were reviewed and could be replaced by the CID PIN shown. For actual part marking requirements, see the marking paragraph in A–A–59590.
2/ Other lengths are available on request.
3/ PINs listed are for CAGE 61081 (1).
4/ PINs listed are for CAGE 61081 (2).

Guidance on use of alternative parts with less hazardous or non–hazardous materials. This CID specification sheet provides for a number of alternative plating materials via the PIN. Users should select the PIN with the least hazardous material that meets the form, fit, and function requirements of their application.

Changes from previous issue. The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:20Z
Check the source to verify that this is the current version before use.

MILITARY INTERESTS:

Custodians:
Army – CR
Navy – EC
Air Force – 85
DLA – CC

Review activity:
Air Force – 99

CIVIL AGENCY COORDINATING ACTIVITY:

GSA – FAS

Preparing activity:
DLA – CC

Project 5998–2018–025

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:20Z
Check the source to verify that this is the current version before use.