METRIC
A-A-59592B
4 April 2017
SUPERSEDING
A-A-59592A
14 January 2009

COMMERCIAL ITEM DESCRIPTION

CAN, FUEL, MILITARY: 20-LITER CAPACITY

The General Services Administration has authorized the use of this commercial item description for all federal agencies.

1. SCOPE. This Commercial Item Description (CID) covers rectangular military fuel cans (jerrican) with a 20-liter capacity and flexible spout. The fuel can is used for temporary portable storage, transportation, and dispensing of military fuels.

2. CLASSIFICATION. The fuel can assembly includes the fuel can and cap and shall conform to the following types. The desired color of the fuel can assembly and cap to be furnished shall be as specified.

Type 1 – Desert sand
Type 2 – Field drab

3. SALIENT CHARACTERISTICS.

3.1 Materials. Unless otherwise specified herein, the materials used shall be in accordance with the manufacturer's specification for fuel can assemblies and spouts. The materials shall be of sufficient durability to meet the operational and environmental requirements as specified herein. Materials shall be resistant to fuel and fuel esters, ultraviolet radiation, and ozone depletion. Materials shall be non-corrosive and non-sparking. The material shall have no adverse effect on the health of personnel when the fuel can assembly is used for its intended purpose. To the maximum extent possible, toxic chemicals or other hazardous substances shall not be used. Ozone Depleting Chemicals (ODC) shall not be used.

3.1.1 Deterioration prevention and control. The fuel can assembly and spout shall be

FSC 7420

Comments, suggestions, or questions on this document should be addressed to U.S. Army RDECOM, Tank Automotive Research Development and Engineering Center, ATTN: RDTA-SIE-ES-PLEP-PLDE-DIS, MS #268, 6501 E. 11 Mile Road, Warren, MI 48397-5000 or sent by email to usarmy.detroit.rdecom.mbx.tardec-standardization@mail.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at https://assist.dla.mil.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:20Z
Check the source to verify that this is the current version before use.

fabricated from compatible materials, inherently corrosion and deterioration resistant, or treated to provide protection against the various forms of corrosion and deterioration to which they are susceptible.

3.1.2 Dissimilar metals. Dissimilar materials shall be isolated from one another to prevent or minimize galvanic corrosion.

3.1.3 Cleaning and treatment. The exterior surfaces of the fuel can assembly and spout shall have a smooth lusterless finish throughout. All surfaces shall be free of dirt, dust, air bubbles, and foreign matter inclusion.

3.2 Performance requirements. The fuel can assembly shall meet the requirements of ASTM F852 with the following exceptions and additional requirements. When required for a test, the cap shall be screwed onto the filler neck of the fuel can with a torque of 14 ±1 Nm.

3.2.1 Color. Color shall be specified in the contract. The colors shall be either lusterless desert sand ANA 616, #30279, or lusterless field drab camo, #33105, of SAE AMS-STD-595.

3.2.2 Capacity. The capacity of the fuel can shall be 20 +1/-0 liters. The capacity shall be determined with the fuel can standing on a level surface and its contents at 23 ±2 ºC.

3.2.3 Stability. The fuel can assembly shall not upset when used on an inclined plane at an angle of 12 degrees with the horizontal, in accordance with the Stability Test of ASTM F852.

3.2.4 Carrying handles. Three carrying handles shall be located on the top of the fuel can (see Figure 1). When tested in accordance with the Handle Strength Test of ASTM F852, using a free fall height of 61 centimeters (cm), the fuel can assembly shall not show evidence of leakage or damage to the handles. Each of the three handles shall be tested three times, for a total of nine drops. Any leakage from the fuel can assembly or damage to the handles making it unable to serve its intended purpose shall constitute failure of this requirement. Leakage shall be defined as visible moisture from the contents apparent on any external surface of the fuel can assembly.

3.2.5 Drop strength.

3.2.5.1 Ambient temperature. The fuel can assembly shall show no evidence of rupture, cracks, or leakage when tested in accordance with the Drop Strength Test of ASTM F852 from a minimum height of 2.4 meters (m). After completion of the drops, the fuel can assembly shall be inverted for a minimum of 5 minutes and observed for leakage. Leakage shall be defined as visible moisture from the contents apparent on any external surface of the fuel can assembly. Any leakage from the fuel can assembly shall constitute failure.

3.2.5.2 Low temperature. The fuel can assembly, filled with a blend of 50% glycol and 50% water, shall be cooled to -40 °C ±3 °C and conditioned for a period of 12 hours. The fuel can assembly shall show no evidence of rupture, cracks, or leakage when tested in accordance with the Drop Strength Test of ASTM F852, from a height of 1.2 m. After completion of the drops, the fuel can assembly shall be inverted for 5 minutes and observed for leakage. Leakage shall be

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:20Z
Check the source to verify that this is the current version before use.

defined as visible moisture from the contents apparent on any external surface of the fuel can assembly. Any leakage from the fuel can assembly shall constitute failure.

3.2.5.3 High temperature. The fuel can assembly, filled with a blend of 50% glycol and 50% water, shall be heated to 70 °C ±3 °C and conditioned for a period of 12 hours. The fuel can assembly shall show no evidence of rupture, cracks, or leakage when tested in accordance with the Drop Strength Test of ASTM F852, from a height of 1.2 m. After completion of the drops, the fuel can assembly shall be inverted for 5 minutes and observed for leakage. Leakage shall be defined as visible moisture from the contents apparent on any external surface of the fuel can assembly. Any leakage from the fuel can assembly shall constitute failure.

3.2.6 Internal pressure.

3.2.6.1 Hydrostatic pressure. The fuel can assembly shall show no evidence of rupture, cracks, or leakage when tested in accordance with the Hydrostatic Pressure Test of ASTM F852, using an internal gage pressure of 206.8 kilopascals (kPa) maintained for one hour. Any evidence of rupture, cracks, or leakage constitutes failure of the test.

3.2.6.1.1 Hydrostatic pressure spot test. Subject the same fuel can assembly that passed in 3.2.6.1 to an internal gage pressure of 413.7 kPa for 5 seconds. Any evidence of rupture, cracks, or leakage constitutes failure of the test.

3.2.6.2 Non-destructive hydrostatic pressure. The fuel can assembly shall show no evidence of rupture, cracks, or leakage when subjected to an internal gage air pressure of 103 kPa applied through an adapter inserted into the cap assembly. The pressurized fuel can assembly shall be placed under water and all surfaces shall be wiped clean of clinging bubbles. Prior to performing the inspection, the water shall be allowed to stabilize and clarify for not less than 2 minutes. Upon inspection of the fuel can assembly, any air leaking from the fuel can assembly shall constitute failure of this test.

3.2.7 Air transportability. Fuel can assemblies shall comply with ICAO 9284 requirements for air transport.

3.2.8 Aging. The fuel can assembly and components shall not crack, deteriorate, or degrade when tested in accordance with the Aging Test 1 of ASTM F852, with the following changes: a 6,000-watt Xenon or Carbon Arc weathering device shall be used for 720 hours. The test cycle shall consist of four one-half hour moisture cycles per 24-hour period. At the completion of the tests, each sample shall be inspected at a 7 times magnification. Any cracking, deterioration, or degradation of materials constitutes failure of the test.

3.2.9 Fuel can assembly and spout leakage. The fuel can assembly shall be filled with water to its nominal capacity and secured with the cap closed. The fuel can assembly shall be inverted for 30 minutes. After the 30 minute period, inspect the fuel can assembly. Any evidence of rupture, cracks, or leakage constitutes failure of the test. Leakage shall be defined as visible moisture from the contents apparent on any external surface of the fuel can assembly. The spout shall not leak when attached to the fuel can when performing the following: Water shall be

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:20Z
Check the source to verify that this is the current version before use.

poured from the fuel can through the spout and observed for leakage. Leakage shall be defined as visible moisture from the contents apparent on any external surface of the fuel can.

3.2.10 Penetration resistance. The fuel can assembly shall withstand the impact from an 227 ±10 gm, hardened steel plum bob with a point having an inclined angle of 36° and a point radius of 0.0635 cm maximum without penetration or leakage. The distance of the fall, measured from the tip of the plumb bob to the top surface of the can, shall be 61 cm. The test shall be repeated on the top, sides, and bottom of the fuel can. Following these penetration tests, the fuel can assembly shall be checked under water with an internal gage air pressure of 34.5 kPa. Any evidence of leakage of air from the fuel can assembly shall be considered as failure of this test.

3.2.11 EPA compliance. In addition to all federal requirements, the fuel can assembly shall meet the EPA requirements in 40CFR §59, Subpart F - Control of Evaporative Emissions from New and In-Use Portable Fuel Containers unless the manufacturer has been granted a National Security Exemption from the United States Environmental Protection Agency under 40CFR §59.

3.2.12 Cap. The cap shall have features to provide a secure handgrip for opening and closing for personnel wearing protective gear.

3.2.12.1 Gasket. The gasket, captive in the fuel can cap, shall be a fluoroelastomer with a durometer hardness of 60 ±5 and maximum swell of 10%, in accordance with ASTM D2240 and ASTM D471 using ASTM F852 as guidance.

3.2.12.2 Cap tether. The fuel can cap shall include a tether to securely connect the cap to the fuel can. The tether shall be retained at the filler neck retention groove (see Figure 2) on the fuel can to preclude loss of the cap.

3.2.13 Spout. When specified (see 7.3), the spout shall be capable of flexing to a minimum angle of 60° without binding or straining. The length of the spout shall be 45 ±5 cm in with a maximum external diameter no larger than 3.8 cm. The mating thread of the spout shall interface with the external thread design on the filler neck of the fuel can (see Figure 2). The spout shall provide a high flow rate allowing the contents of the fuel can to be emptied in less than one minute.

3.2.13.1 Filtration. The spout shall filter out debris from the contents when poured with no larger than 100 mesh screen size.

3.2.14 Air vent. The fuel can shall have a means to provide proper ventilation, to ensure smooth fuel flow, while dispensing the fuel to the end item. The ventilation shall be able to withstand all of the testing required within this document and during normal usage and be in compliance with 3.2.11. Any leakage or damage to the ventilation area shall be considered a failure.

3.3 Fire safety. The fuel can assembly shall not contribute to the hazards from fire and explosion inherent in the fuels it will contain. When engulfed in a fire, the fuel can assembly shall not explode nor vent fuel vapor in a manner that creates a flaming jet-like plume.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:20Z
Check the source to verify that this is the current version before use.

3.4 Interface and interoperability requirements.

3.4.1 Fuel can envelope. The fuel can assembly design shall incorporate the size constraints (see Figure 1) imposed by the bracket assembly as specified in A-A-52513.

3.4.2 Fuel compatibility. The fuel can assembly, and the spout, shall be compatible with all military fuels, to include: ASTM D975 (diesel), ASTM D1655 (Jet A-1), MIL-DTL-83133 (JP-8, NATO F-34, NATO F-35), MIL-DTL-5624 (JP-5, NATO F-44), AFLP-3747 (NATO F-24), and unleaded gasoline ASTM D4814 (unleaded gasoline).

3.4.3 Spout and filler neck. The mating thread of the spout shall interface with the external thread design on the filler neck of the fuel can (see Figure 2).

3.5 Marking. The warning statements “FOR STORAGE OF FUELS ONLY” and “DO NOT USE FOR DRINKING WATER” shall be added. The statement “U.S. GOVERNMENT PROPERTY” will also be added. Lettering shall be capitalized and sized to match existing lettering. Figures 1 and 3 provide the locations and applicable nomenclature for additional markings to be placed on the fuel can. UN marking shall be in accordance with AFM 24-204, “Sample of UN Non-bulk Specification Packaging Marking for Liquids” (See figure 3).

3.6 Workmanship. The fuel can assembly and spout shall be clean and free from flash, bubbles, cuts, tears, holes, burns, breaks, cracks, pinholes, pits, warpage, blisters, and scratches. The fuel can assembly and spout shall show no sign of discoloration, surface deterioration, roughness, orange peel, or grease.

4. REGULATORY REQUIREMENTS. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

5. PRODUCT CONFORMANCE PROVISIONS

5.1 Product conformance. The products provided shall meet the salient characteristics of this CID, conform to the producer’s own drawings, specifications, standards, and quality assurance practices, and be the same product offered for sale in the commercial marketplace. The Government reserves the right to require proof of such conformance.

5.2 Inspection. The fuel can assembly and spout shall be inspected to determine compliance with all requirements specified in this CID. The contractor is responsible for the performance of all inspections (examinations and tests).


5.3 Certificate of conformity. Unless otherwise specified, the contractor shall provide a copy of the certificate of conformity issued by the EPA (see 3.2.11) for the specified production period.

6. PACKAGING. Preservation and packing shall be as specified in the contract or order (see 7.3).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:20Z
Check the source to verify that this is the current version before use.

7. NOTES

7.1 Part or Identification Number (PIN). The PINs to be used for fuel can assemblies or components acquired to this CID are created as follows:

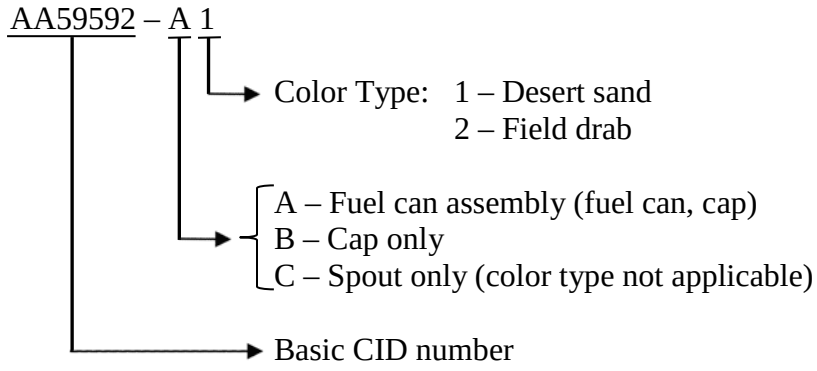


7.2 Ordering data. Acquisition documents must specify the following:


a. CID document number, revision, and CID PIN.
b. Any special marking (see 3.5).
c. Product conformance provisions.
d. NSN's: 7240-01-337-5268 Military Fuel Can, color American Sand
7240-01-337-5269 Military Fuel Can, color Field Drab
7240-00-177-6154 Spout, 1"
7240-21-911-8834 MFC Adapter, Multi-Function
7240-21-912- 7162 MFC Adapter, Gravity Feed
7310-01-455-3736 MFC Adapter, Suction Feed
e. Packaging required (see 6).

7.3 Key words.

Container
Plastic
Can
Fuel
Jerrican

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:20Z
Check the source to verify that this is the current version before use.

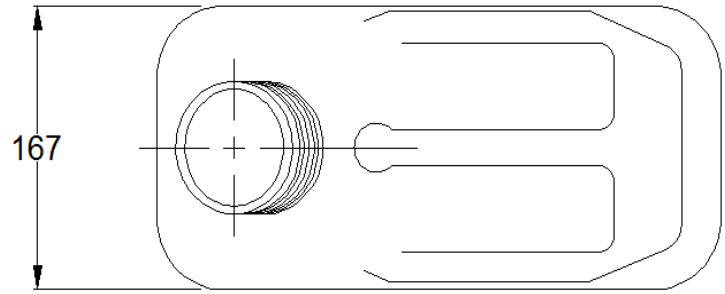

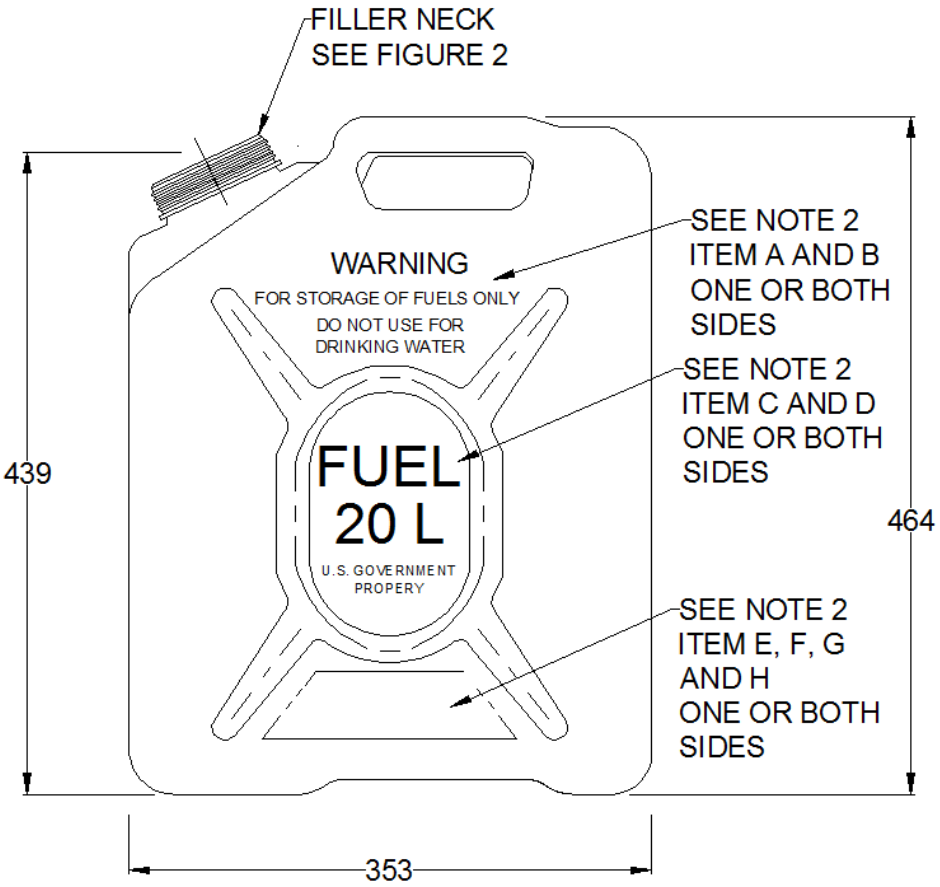

NOTES:
1. Unless otherwise specified, dimensions are in millimeters (mm).
2. All markings shall be located as close to the location shown. Refer to Table I and Figure 3 for specific marking descriptions. Unless otherwise specified, Tolerance: ± 5 mm in Figure 1 and Table I.
3. No other markings authorized.


FIGURE 1. Fuel can - dimensions and marking.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:20Z
Check the source to verify that this is the current version before use.

TABLE I. Marking for fuel can.

ITEM	LEGEND	CHARACTER HEIGHT ±5	EMBOSSED FORM
A	WARNING	15	RAISED
B	FOR STORAGE OF FUELS ONLY DO NOT USE FOR DRINKING WATER	13	RAISED
C	FUEL 20 L	32	DEPRESSED (±2) Width of letter - 15 Width of depression - 7 Depression depth - 3
D	U.S. GOVERNMENT PROPERTY	13	RAISED
E	See Figure 3	-	RAISED
F	49CFR59.660 EXEMPT FOR MILITARY USE ONLY	7	RAISED
G	Manufacture's Name or CAGE Code	7	RAISED
H	Insert appropriate recyle symbol anywhere on the container but, not within 50 mm of A - G above. Below is a typical symbol for a normal plastic fuel container made of high-density polyethelene: 	15	RAISED

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:20Z
Check the source to verify that this is the current version before use.

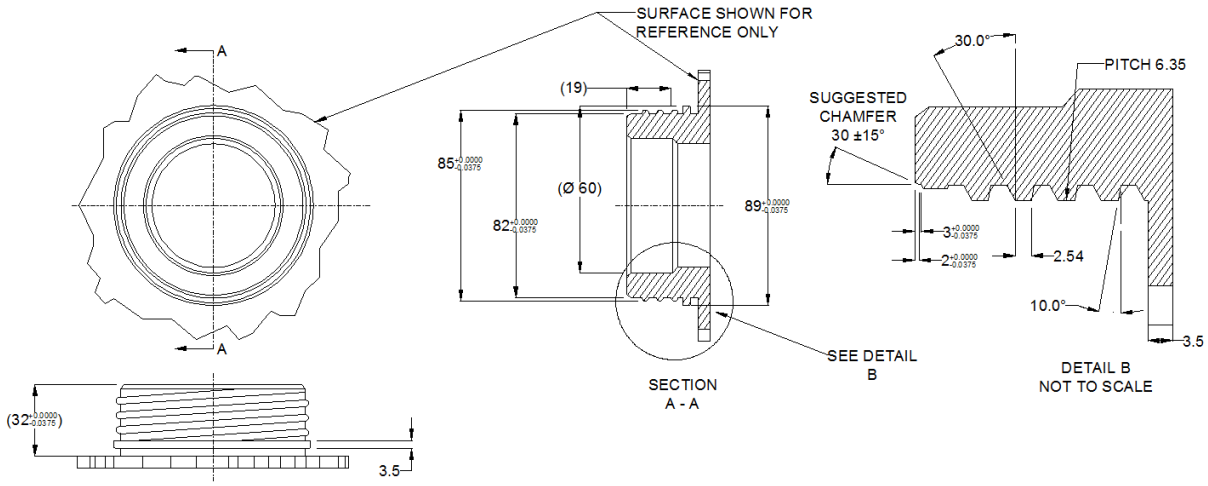

NOTES:


1. Unless otherwise specified, dimensions are in millimeters (mm).
2. Unless otherwise specified, tolerances (mm) are as follows:

x.xx = ±0.02
Degrees = ±1°

FIGURE 2. Fuel can filler neck.

(a) United Nations symbol
(b) 3H1 - is the identification code for a plastic jerrican without a removable lid
(c) Y - is hazardous packaging group - (II and III) (since the specific gravity of Gasoline, Diesel, and JP-8 are less than 1.2, no information required behind the packing group designator)
(d) Test pressurized to (Kilopascals) rounded to the nearest 10 kPa
(e) Year of manufacture (2017 shown)
(f) Country of manufacture code (USA shown)
(g) Symbol for manufacture/certifier (XXX is shown but means nothing)

a b c d e f g

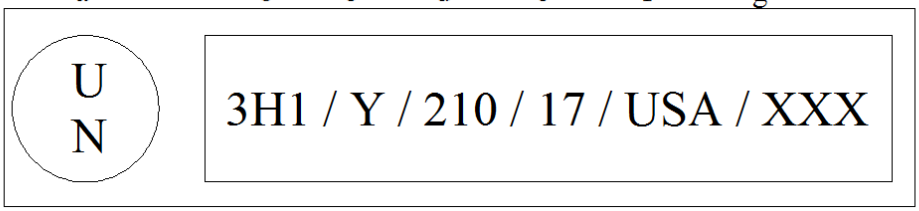

Size of UN symbol 20 mm, lettering 10

FIGURE 3. AFM 24-204 requirement

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:20Z
Check the source to verify that this is the current version before use.

MILITARY INTERESTS:

Lead Standardization Activity:
Army – GL

Custodians:
Army – AT
Air Force – 184
DLA – IS

Preparing Activity:
Army – AT

Review Activities:
Army – GL
Air Force – 84

(Project 7240-2017-001)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:20Z
Check the source to verify that this is the current version before use.