
MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, CIRCULAR, MINIATURE, HIGH DENSITY, QUICK DISCONNECT (BAYONET, THREADED, AND BREECH COUPLING), ENVIRONMENT RESISTANT, REMOVABLE CRIMP AND HERMETIC SOLDER CONTACTS, RECEPTACLE, BOX MOUNTING FLANGE, HERMETIC, BREECH COUPLING, HERMETIC SOLDER CONTACTS, SERIES IV, METRIC

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE.

THE COMPLETE REQUIREMENTS FOR PROCURING THE CONNECTORS DESCRIBED HEREIN SHALL CONSIST OF THIS DOCUMENT AND THE LATEST ISSUE OF SPECIFICATION MIL-C-38999.

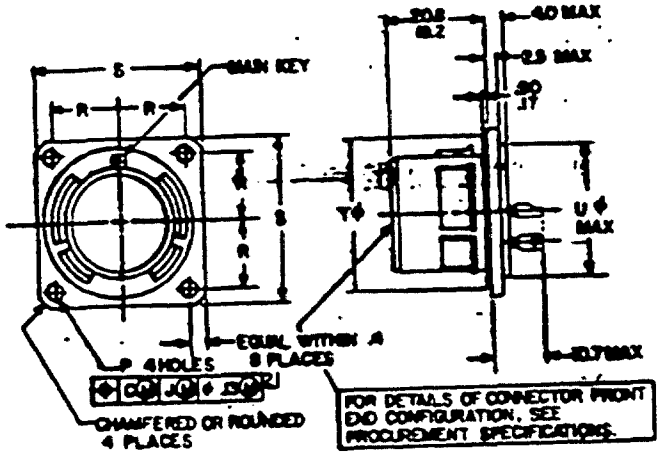

SHELL SIZE	SHELL SIZE CODE	PD	R BSC	S	TD	UP MAX.
11	A	3.5 3.1	10.31	26.7 25.6	20.15 19.76	15.88
13	C		11.51	29.1 28.0	23.35 22.96	19.05
15	D		12.31	31.5 30.4	26.52 26.13	23.01
17	E		13.49	33.9 32.8	29.72 29.33	25.81
19	F		14.68	37.1 36.0	32.87 32.48	28.98
21	G		15.86	40.7 39.1	36.05 35.66	32.16
23	H	4.0 3.6	17.44	43.6 42.3	39.22 38.83	34.93
25	J		19.05	46.6 45.5	42.40 42.01	37.69

NOTES: 1. DIMENSIONS ARE IN MILLIMETERS.
2. THE CAGE FEATURES FOR [-J-] SHALL BE 0.25 MM (.010 IN.) LARGER THAN THE MAX SIZE AT BASIC LOCATION.

FIGURE 1. RECEPTACLE, CLASSES H AND T.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:51Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

DIMENSIONS AND CONFIGURATIONS: SEE FIGURE 1. INTERFACE DIMENSIONS SHALL CONFORM TO MIL-C-38999.

THIS CONNECTOR MATES WITH: DOD-C-38999/46 and /47.

MAIN KEY COLOR: BLUE

FOR INSERT ARRANGEMENTS: SEE MIL-STD-1560.

PART NUMBER EXAMPLE: D38999/ 41 N B 35 P N

- DOD NO. PREFIX
- SPECIFICATION SHEET NO.
- CLASS
- SHELL SIZE CODE
- INSERT ARRANGEMENT
- CONTACT STYLE
  - P - PIN, SOLDER CUP. AVAILABLE IN CONTACT SIZES 22D, 20, 16, AND 12
  - X - PIN, EYELET. AVAILABLE IN CONTACT SIZES 20 AND 16 ONLY.
- POLARIZING POSITION
  "N" IS REQUIRED FOR NORMAL POSITION

CUSTODIANS:
ARMY - CR
NAVY - AS
AIR FORCE - 85

REVIEW ACTIVITIES:
ARMY - AR, MI
NAVY - EC, OS, MS
AIR FORCE - 11, 15, 17, 99
DLA - ES

PREPARING ACTIVITY:
NAVY - AS
PROJECT NO. 5935-3139-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:51Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.
NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER (Number) AND TITLE DoD-C-38999/41 CONNECTORS, ELECTRICAL, CIRCULAR MINIATURE, HIGH DENSITY, QUICK DISCONNECT, ENVIRONMENT RESISTANT

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY (Printed or typed name and address – Optional)	TELEPHONE NO.
	DATE

DD FORM 1 OCT 76 1426 Replaces edition of 1 Jan 72 which may be used. S/N 0102-LF-001-4260

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:51Z
Check the source to verify that this is the current version before use.