METRIC


MIL-DTL-38999/41B
8 September 2010
SUPERSEDING
MIL-DTL-38999/41A
11 June 2001

DETAIL SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, CIRCULAR, RECEPTACLE, BOX MOUNTING FLANGE, HERMETIC, BREECH COUPLING, HERMETIC SOLDER CONTACTS, SERIES IV, METRIC

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-38999.

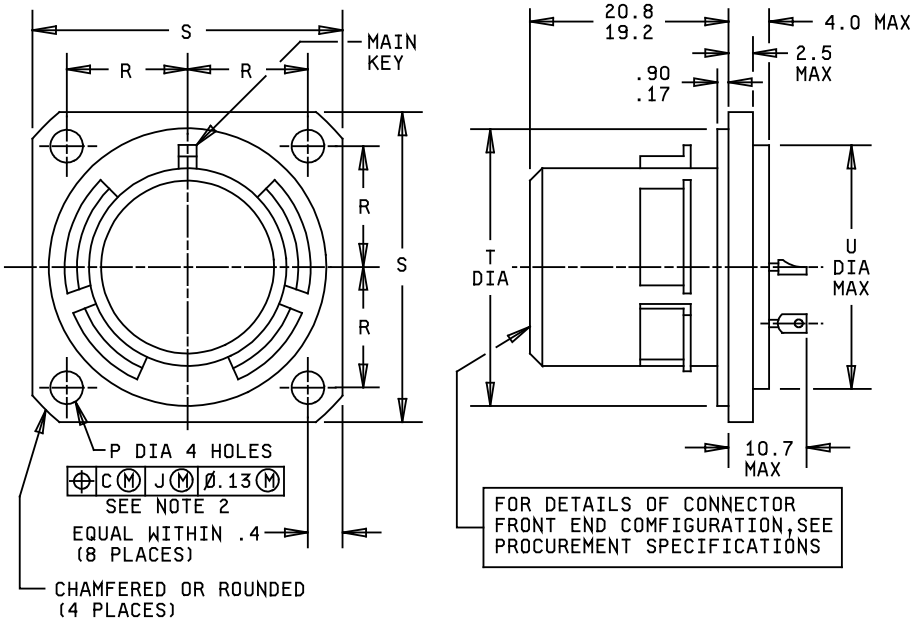

mm	Inches
.13	.005
.17	.006
.25	.0098
.90	.035
2.5	.098
4.0	.157
10.7	.421
19.2	.755
20.8	.818

FIGURE 1. Receptacle, classes N and Y.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:51Z
Check the source to verify that this is the current version before use.

Shell size	Shell size code	P dia	R BSC	S	T dia	U dia max
11	B	3.5 (.137) 3.1 (.122)	10.31 (.405)	26.7 (1.05) 25.6 (1.00)	20.15 (.793) 19.76 (.777)	15.88 (.625)
13	C		11.51 (.453)	29.1 (1.14) 28.0 (1.10)	23.35 (.919) 22.96 (.903)	19.05 (.789)
15	D		12.31 (.484)	31.5 (1.24) 30.4 (1.19)	26.52 (1.04) 26.13 (1.02)	23.01 (.905)
17	E		13.49 (.531)	33.9 (1.33) 32.8 (1.291)	29.72 (1.17) 29.33 (1.15)	25.81 (1.01)
19	F		14.68 (.577)	37.1 (1.46) 36.0 (1.41)	32.87 (1.29) 32.48 (1.27)	28.98 (1.14)
21	G		15.88 (.625)	40.2 (1.58) 39.1 (1.53)	36.05 (1.41) 35.66 (1.40)	32.16 (1.26)
23	H	4.0 (.157) 3.6 (.141)	17.46 (.687)	43.4 (1.70) 42.3 (1.66)	39.22 (1.54) 38.83 (1.52)	34.93 (1.37)
25	J		19.05 (.749)	46.6 (1.83) 45.5 (1.79)	42.40 (1.66) 42.01 (1.65)	37.69 (1.48)

FIGURE 1. Receptacle, classes N and Y - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:51Z
Check the source to verify that this is the current version before use.

NOTES:
1. Dimensions are in millimeters.
2. The gage features for “J” shall be 0.25 mm (.010 in) larger than the maximum material condition (mmc) size at basic location.
3. Inch-pound conversion are provided in parentheses for information only.

FIGURE 1. Receptacle, classes N and Y - Continued.

REQUIREMENTS:

Dimensions and configurations: See figure 1.


Interface dimensions shall conform to MIL-DTL-38999.

This connector mates with MIL-DTL-38999/46 and /47.

Main key color: Blue.

For insert arrangements: See MIL-STD-1560.

Part or Identifying Number (PIN) example:

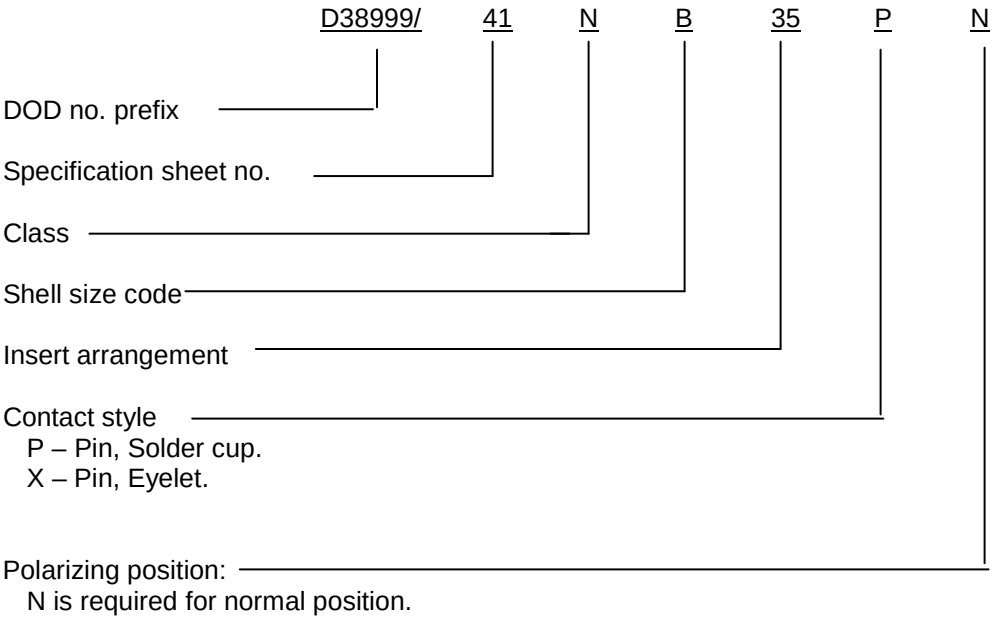

For contact termination: See MIL-DTL-38999.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:51Z
Check the source to verify that this is the current version before use.

Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Referenced documents. In addition to MIL-DTL-38999, this document references the following:

MIL-STD-38999/46
MIL-STD-38999/47
MIL-STD-1560

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - AS
Air Force - 85
DLA - CC

Preparing activity:
DLA - CC

(Project 5935-2010-026)

Review activities:
Army - AR, MI
Navy - EC, MC, OS
Air Force - 19, 99

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:51Z
Check the source to verify that this is the current version before use.