METRIC

MIL-DTL-38999/42B
14 August 2009
SUPERSEDING
MIL-DTL-38999/42A
11 June 2001

DETAIL SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, CIRCULAR, RECEPTACLE, BOX MOUNTING FLANGE, BREECH COUPLING, REMOVABLE CRIMP CONTACTS, SERIES IV, METRIC

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-38999.

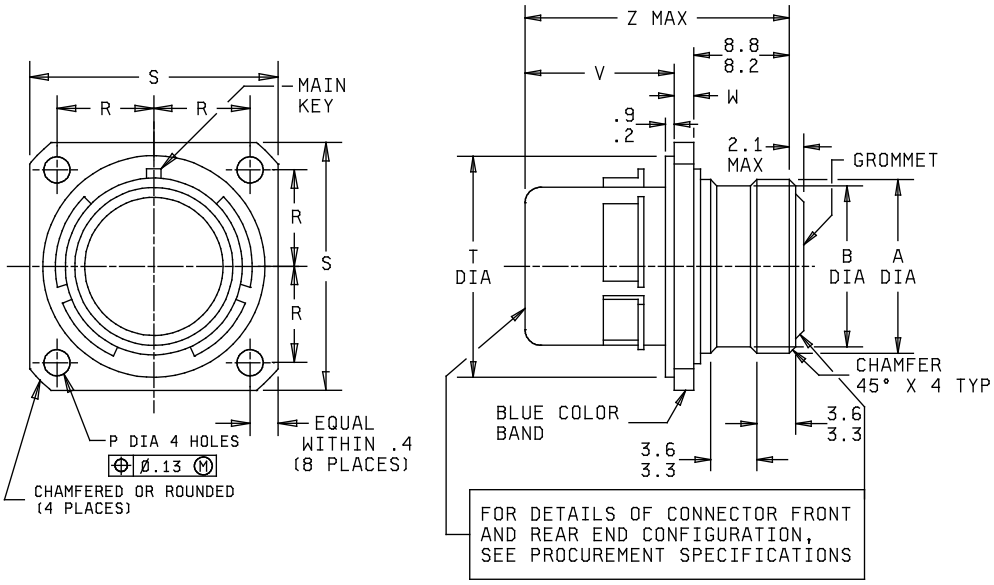


FIGURE 1. Receptacle, classes C, F, P, R, T, W, X and Z.

mm	Inches
.2	.008
.4	.016
.9	.035
2.1	.083
3.3	.130
3.6	.142
8.2	.323
8.8	.346

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:52Z
Check the source to verify that this is the current version before use.

Shell size	Shell size code	A dia	B dia	P dia	R BSC	S
11	B	14.7 (.579) 14.3 (.563)	13.6 (.535) 13.2 (.520)	3.5 (.138) 3.1 (.122)	10.31 (.406)	26.7 (1.051) 25.6 (1.008)
13	C	17.6 (.693) 17.2 (.677)	16.5 (.650) 16.1 (.634)		11.51 (.453)	29.1 (1.146) 28.0 (1.102)
15	D	20.8 (.819) 20.4 (.803)	19.6 (.772) 19.2 (.756)		12.31 (.485)	31.5 (1.240) 30.4 (1.197)
17	E	24.0 (.945) 23.6 (.929)	22.8 (.898) 22.4 (.882)		13.49 (.531)	33.9 (1.335) 32.8 (1.291)
19	F	26.7 (1.051) 26.3 (1.035)	25.5 (1.004) 25.1 (.988)		14.68 (.578)	37.1 (1.461) 36.0 (1.417)
21	G	29.8 (1.173) 29.4 (1.157)	28.7 (1.130) 28.3 (1.114)		15.88 (.625)	40.2 (1.583) 39.1 (1.539)
23	H	33.0 (1.299) 32.6 (1.283)	31.9 (1.256) 31.5 (1.240)	4.0 (.157) 3.6 (.142)	17.46 (.687)	43.4 (1.709) 42.3 (1.665)
25	J	36.2 (1.425) 35.8 (1.409)	35.0 (1.378) 34.6 (1.362)		19.05 (.750)	46.6 (1.835) 45.5 (1.791)

FIGURE 1. Receptacle, classes C, F, P, R, T, W , X and Z - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:52Z
Check the source to verify that this is the current version before use.

Shell size	Shell size code	T dia	V	W	Z max
11	B	20.15 (.793) 19.76 (.778)	20.8 (.819) 19.2 (.756)	2.6 (.102) 2.1 (.083)	32.0 (1.260)
13	C	23.35 (.919) 22.96 (.904)			
15	D	26.52 (1.044) 26.13 (1.029)			
17	E	29.72 (1.170) 29.33 (1.155)			
19	F	32.87 (1.294) 32.48 (1.279)			
21	G	36.05 (1.419) 35.66 (1.404)		3.4 (.134) 2.9 (.114)	
23	H	39.22 (1.544) 33.83 (1.332)			
25	J	42.40 (1.669) 42.01 (1.654)			

NOTES:
1. Dimensions are in millimeters.
2. Inch-pound equivalents are given for information only.

FIGURE 1. Receptacle, classes C, F, P, R, T, W , X and Z – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:52Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configurations: See figure 1.


Interface dimensions shall conform to MIL-DTL-38999.

This connector mates with MIL-DTL-38999/46 and /47.

Main key color: Blue.

For insert arrangements: See MIL-STD-1560.

Part or Identifying Number (PIN) example:

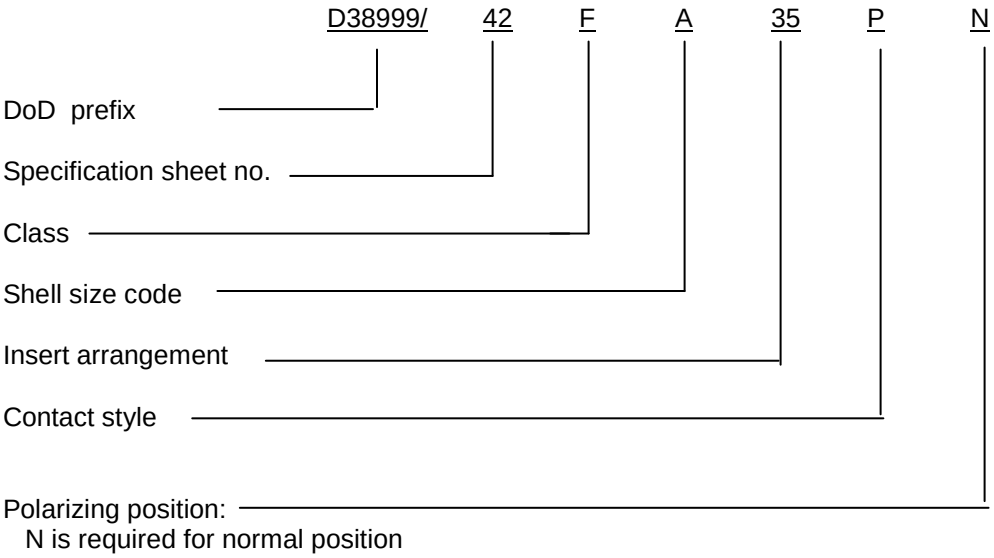

Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Referenced documents. In addition to MIL-DTL-38999, this document references the following:

MIL-DTL-38999/46
MIL-DTL-38999/47
MIL-STD-1560

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:52Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - AS
Air Force - 85
DLA - CC

Preparing activity:
DLA - CC

(Project 5935-2009-150)

Review activities:
Army - AR, MI
Navy - EC, MC, OS
Air Force - 19, 99

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:52Z
Check the source to verify that this is the current version before use.