METRIC


MIL-DTL-38999/43B
8 September 2010
SUPERSEDING
MIL-DTL-38999/43A
11 June 2001

DETAIL SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, CIRCULAR, RECEPTACLE, JAM NUT MOUNTING, HERMETIC, BREECH COUPLING, HERMETIC SOLDER CONTACTS, SERIES IV, METRIC

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-38999.

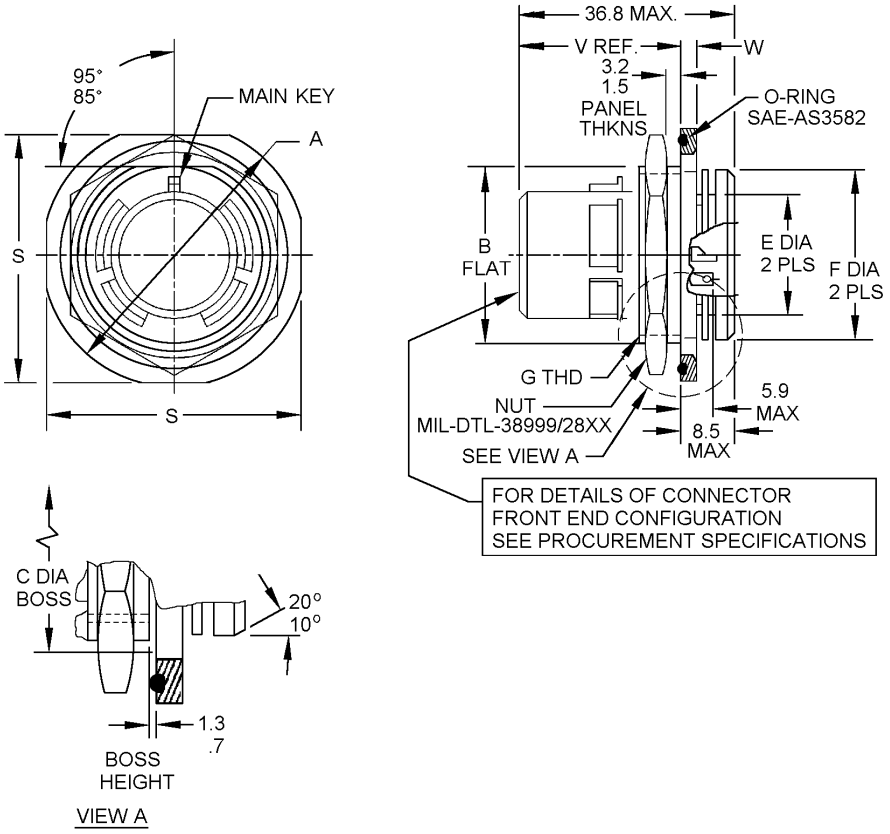

mm	Inches
36.8	1.44
8.5	.334
5.9	.232
3.2	.125
1.5	.059
1.3	.051
.2	.007

FIGURE 1. Receptacle, classes N and Y.

AMSC N/A

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:52Z
Check the source to verify that this is the current version before use.

Shell size	Shell size code	A	B flat	C dia boss	E dia	F dia
11	B	35.2 (1.38) 34.6 (1.36)	19.17 (.754) 18.92 (.744)	20.70 (.814) 20.40 (.803)	18.6 (.732) 18.2 (.716)	19.8 (.779) 19.3 (.759)
13	C	38.4 (1.51) 37.8 (1.488)	23.92 (.941) 23.67 (.931)	25.50 (1.00) 25.20 (.992)	21.8 (.858) 21.3 (.838)	23.1 (.909) 22.6 (.889)
15	D	41.6 (1.63) 41.0 (1.64)	27.07 (1.06) 26.82 (1.05)	28.60 (.992) 28.30 (1.11)	25.0 (.984) 24.6 (.968)	26.3 (1.03) 25.8 (1.01)
17	E	44.8 (1.76) 44.2 (1.74)	30.25 (1.19) 30.00 (1.18)	31.98 (1.25) MAX	28.2 (1.11) 27.7 (1.09)	29.4 (1.15) 28.9 (1.13)
19	F	49.5 (1.94) 48.9 (1.92)	33.44 (1.31) 33.17 (1.30)	35.15 (1.38) MAX	31.4 (1.23) 31.0 (1.32)	32.6 (1.28) 32.1 (1.26)
21	G	52.7 (2.07) 52.1 (2.05)	36.62 (1.44) 36.35 (1.43)	38.28 (1.507) MAX	34.5 (1.35) 34.1 (1.34)	35.8 (1.27) 35.3 (1.38)
23	H	55.9 (2.20) 55.3 (2.17)	39.75 (1.56) 39.52 (1.55)	41.30 (1.62) 41.00 (1.61)	37.7 (1.48) 37.3 (1.46)	39.0 (1.53) 38.5 (1.51)
25	J	59.1 (2.32) 58.4 (2.29)	42.98 (1.55) 42.70 (1.68)	44.50 (1.61) 44.20 (1.74)	40.9 (1.61) 40.5 (1.59)	42.1 (1.61) 41.6 (1.63)

FIGURE 1. Receptacle, classes N and Y – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:52Z
Check the source to verify that this is the current version before use.

Shell size	Shell size code	G thread	S	V ref	W	O-ring
11	B	M20X1- 6g 0.100R	32.2 (1.27) 31.3 (1.23)	28.4 (1.11) 27.5 (1.08)	3.0 (.118) 2.4 (.094)	AS 3582-022
13	C	M25X1- 6g 0.100R	35.4 (1.39) 34.5 (1.35)			AS 3582-024
15	D	M28X1- 6g 0.100R	38.6 (1.51) 37.7 (1.48)			AS 3582-026
17	E	M32X1- 6g 0.100R see note 2	41.7 (1.64) 40.8 (1.60)			AS 3582-028
19	F	M35X1- 6g 0.100R	46.5 (1.83) 45.6 (1.79)		3.8 (.149) 3.2 (.125)	AS 3582-128
21	G	M38X1- 6g 0.100R	49.7 (1.95) 48.8 (1.92)			AS 3582-130
23	H	M41X1- 6g 0.100R	52.8 (2.07) 51.9 (2.04)			AS 3582-132
25	J	M44X1- 6g 0.100R	56.0 (2.20) 55.1 (2.16)			AS 3582-134

NOTES:
1. Dimensions are in millimeters.
2. Modified major DIA 31.80-31.95.
3. Inch-pound conversion are provided in parentheses for information only.

FIGURE 1. Receptacle, classes N, and Y – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:52Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configurations: See figure 1.


Interface dimensions shall conform to MIL-DTL-38999.

This connector mates with MIL-DTL-38999/46 and /47.

Main key color: Blue.

For insert arrangements: See MIL-STD-1560.

Part or Identifying Number (PIN) example:

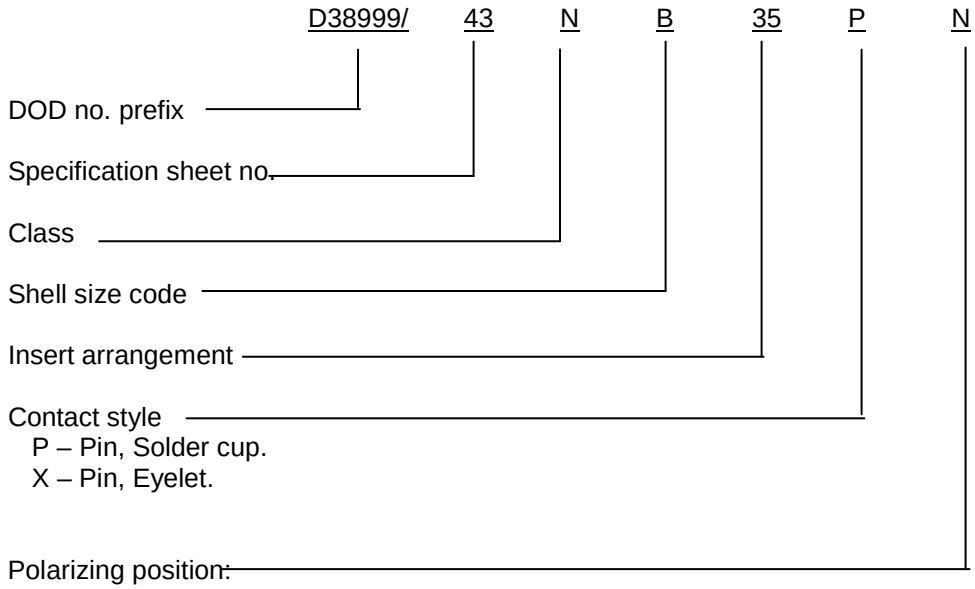

For contact termination: See MIL-DTL-38999.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:52Z
Check the source to verify that this is the current version before use.

Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Referenced documents: In addition to MIL-DTL-38999, this document references the following:

MIL-DTL-38999/46
MIL-DTL-38999/47
MIL-STD-1560
SAE-AS3582

CONCLUDING MATERIAL

Custodians:
Army – CR
Navy - AS
Air Force – 85
DLA - CC

Preparing activity:
DLA - CC

(Project 5935-2010-027)

Review activities:
Army - AR, MI
Navy - EC, MC, OS
Air Force - 19, 99

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:52Z
Check the source to verify that this is the current version before use.