METRIC

MIL-DTL-38999/44B
11 June 2001
SUPERSEDING
DOD-C-38999/44A
15 August 1986

DETAIL SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, CIRCULAR, RECEPTACLE, JAN-NUT MOUNTING, BREECH COUPLING REMOVABLE CRIMP CONTACTS, SERIES IV, METRIC

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification and MIL-DTL-38999.

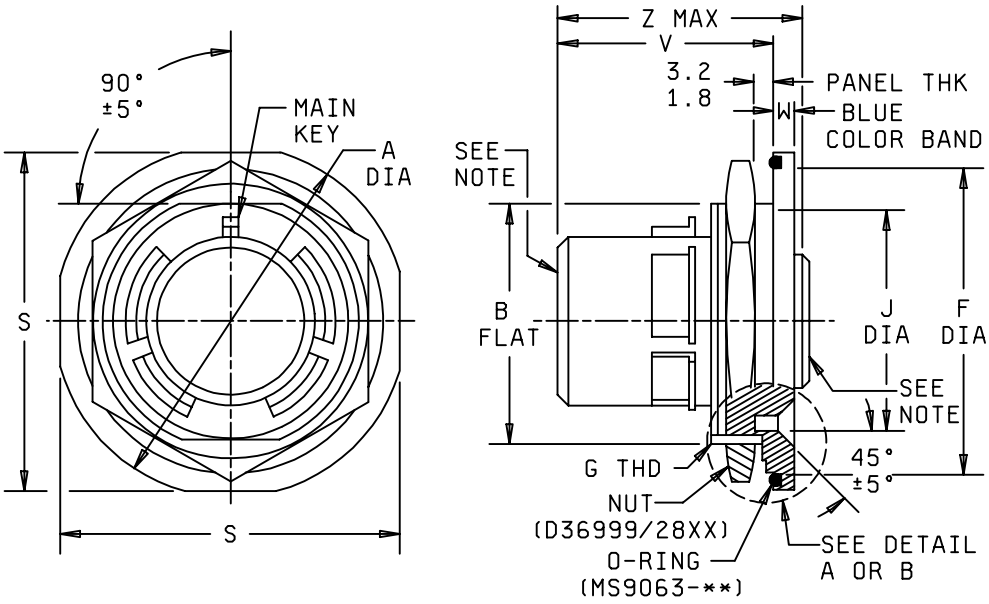

NOTE: For details of connector front and rear end configuration, see procurement specifications

FIGURE 1. Receptacle, classes C, F, K, R, S, W and X.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:53Z
Check the source to verify that this is the current version before use.

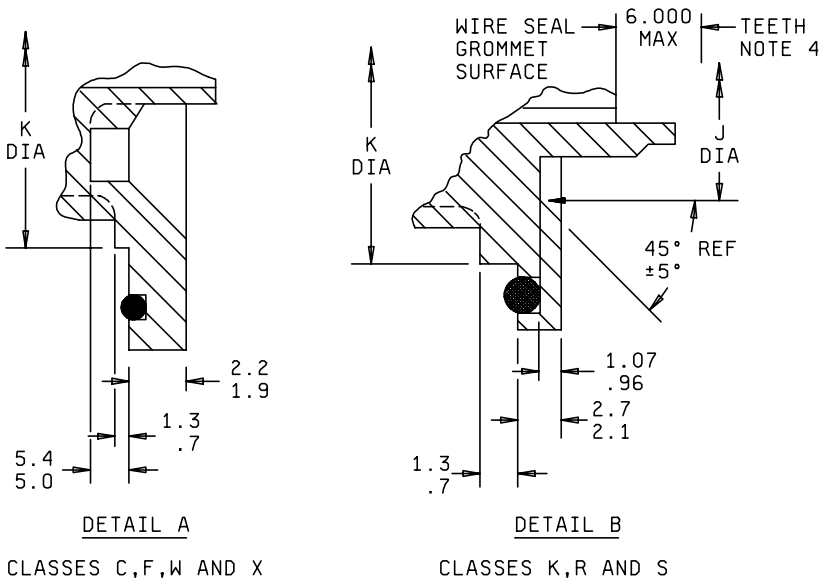

FIGURE 1. Receptacle, classes C, F, K, R, S, W and X – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:53Z
Check the source to verify that this is the current version before use.

Shell size	Shell size code	A dia	B flat	F dia	G thread plated	J dia	K dia	S
		38.6	23.93	27.84		20.42	25.40	35.4
11	B	37.6	23.74	27.55	M25x1-6g 0.1R	20.17	25.15	34.4
		41.7	27.08	31.02		23.57	25.58	38.6
13	C	40.7	26.89	30.73	M28X1-6g 0.1R	23.32	28.33	37.6
		44.9	30.26	34.19		26.56	31.75	41.7
15	D	43.9	30.07	33.90	M31X1-6g 0.1R	26.31	31.50	40.7
		49.7	33.56	37.67		30.02	34.92	45.7
17	E	48.7	33.37	37.38	M34X1-6g 0.1R	29.77	34.67	44.7
		51.7	36.61	40.85		32.91	38.10	48.5
19	F	50.7	36.42	40.56	M38X1-6g 0.1R	32.66	37.85	47.5
		54.8	39.78	44.02		36.11	41.28	51.7
21	G	53.8	39.59	43.73	M41X1-6g 0.1R	35.86	41.03	50.7
		58.0	42.96	47.20		39.26	44.45	54.8
23	H	57.0	42.77	46.91	M44X1-6g 0.1R	39.01	44.20	53.8
		61.2	46.13	50.37		42.46	47.63	58.0
25	J	60.2	45.94	50.08	M47X1-6g 0.1R	42.21	47.38	57.0

Shell size	Shell size code	V	W	Z max (see note 2)	Z max (see note 3)	Recommended packing (O-ring)
11	B					AS 3582-24
13	C					AS 3582-26
15	D					AS 3582-28
17	E	28.4	2.7			AS 3582-29
19	F	27.5	1.9	32.0	39.5	AS 3582-30
21	G					AS 3582-31
23	H					AS 3582-32
25	J					AS 3582-33

NOTES:
1. Dimensions are in millimeters.
2. Classes C, F, W and X.
3. Classes K, S and R.
4. Insert can be recessed a max of 6.00 mm back of teeth.

FIGURE 1. Receptacle, classes C, F, K, R, S, W and X - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:53Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configurations: See figure 1.

Interface dimensions shall conform to MIL-DTL-38999.

This connector mates with the following:

Classes C, F, W and X of MIL-DTL-38999/46 and 47 and
Classes K, S and R of MIL-DTL-38999/46

Main key color: Blue.

For insert arrangements: See MIL-STD-1560.

Part or Identifying Number (PIN) example:

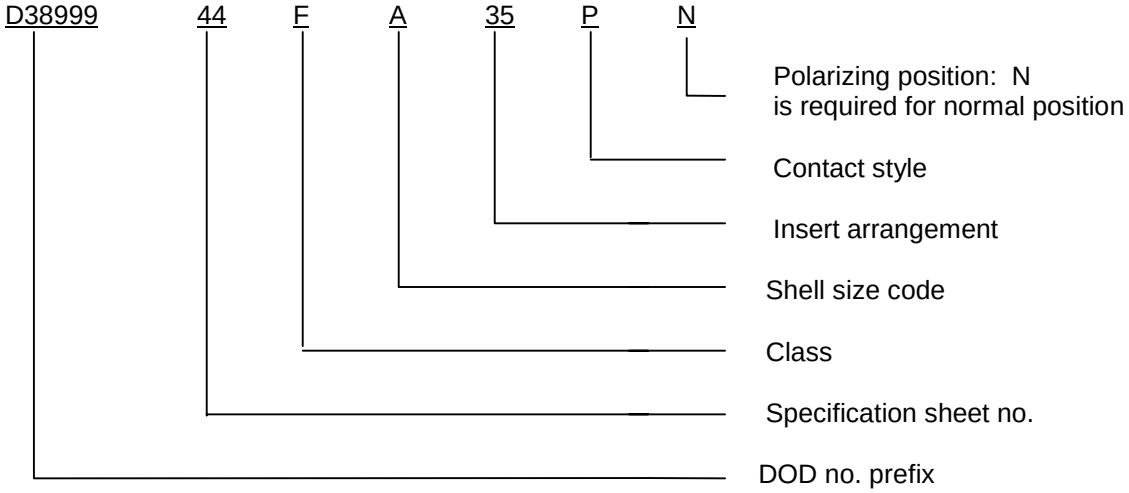

CONCLUDING MATERIAL

Custodians:
Army – CR
Navy - AS
Air Force – 11
DLA - CC

Review activities:
Army - AR, MI
Navy - EC, MC, OS
Air Force - 19, 99

Preparing activity:
DLA - CC

(Project 5935-4301-21)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:53Z
Check the source to verify that this is the current version before use.