
METRIC
MIL-DTL-38999/44D
14 August 2009
SUPERSEDING
MIL-DTL-38999/44C
14 July 2004

DETAIL SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, CIRCULAR, RECEPTACLE, JAM-NUT MOUNTING, BREECH COUPLING, REMOVABLE CRIMP CONTACTS, SERIES IV, METRIC

This specification is approved for use by all Departments and Agencies of the Department of Defense.


The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-38999.

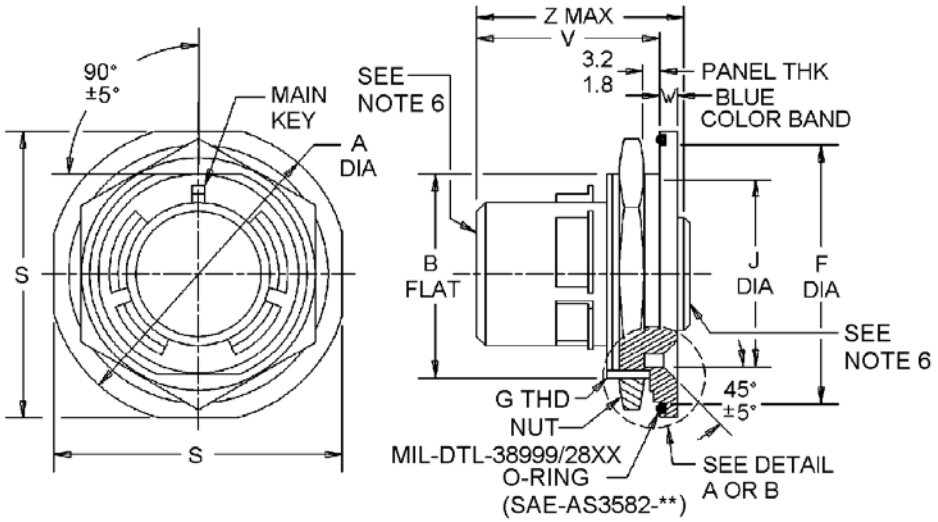

mm	Inches
.071	1.8
.126	3.2

FIGURE 1. Receptacle, classes C, F, K, P, R, S, T, W , X and Z.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:52Z
Check the source to verify that this is the current version before use.

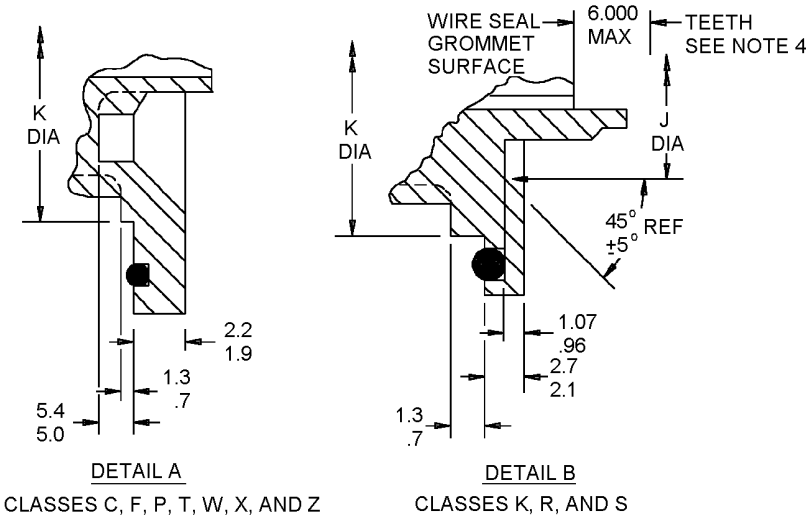

mm	Inches
.028	.7
.038	.96
.042	1.07
.051	1.3
.075	1.9
.083	2.1
.087	2.2
.106	2.7
.197	5.0
.213	5.4
.272	6.9

FIGURE 1. Receptacle, classes C, F, K, P, R, S, T, X ,W and Z - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:52Z
Check the source to verify that this is the current version before use.

Shell size	Shell size code	A dia	B flat	F dia	G thread plated	J dia	K dia	S	V	W	Z max (see note 2)	Z max (see note 3)	Recommended packing (O-ring)
11	B	38.6 (1.520) 37.6 (1.480)	23.93 (.942) 23.74 (.935)	27.84 (1.096) 27.55 (1.085)	M25x1-6g 0.1R	20.42 (.804) 20.17 (.794)	25.40 (1.000) 25.15 (.990)	35.4 (1.394) 34.4 (1.354)	28.4 (1.118) 27.5 (1.083)	2.7 (.106) 1.9 (.075)	32.0 (1.260)	39.5 (1.555)	AS3582-24
13	C	41.7 (1.642) 40.7 (1.602)	27.08 (1.066) 26.89 (1.059)	31.02 (1.221) 30.73 (1.210)	M28X1-6g 0.1R	23.57 (.928) 23.32 (.918)	28.58 (1.125) 28.33 (1.115)	38.6 (1.520) 37.6 (1.480)					AS3582-26
15	D	44.9 (1.768) 43.9 (1.728)	30.26 (1.191) 30.07 (1.184)	34.19 (1.346) 33.90 (1.335)	M31X1-6g 0.1R	26.56 (1.046) 26.31 (1.036)	31.75 (1.250) 31.50 (1.240)	41.7 (1.642) 40.7 (1.602)					AS3582-28
17	E	49.7 (1.957) 48.7 (1.917)	33.56 (1.321) 33.37 (1.314)	37.67 (1.483) 37.38 (1.472)	M34X1-6g 0.1R	30.02 (1.182) 29.77 (1.172)	34.92 (1.375) 34.67 (1.365)	45.7 (1.799) 44.7 (1.760)					AS3582-29
19	F	51.7 (2.035) 50.7 (1.996)	36.61 (1.441) 36.42 (1.434)	40.85 (1.608) 40.56 (1.597)	M38X1-6g 0.1R	32.91 (1.296) 32.66 (1.286)	38.10 (1.500) 37.85 (1.490)	48.5 (1.909) 47.5 (1.870)					AS3582-30
21	G	54.8 (2.157) 53.8 (2.118)	39.78 (1.566) 39.59 (1.559)	44.02 (1.733) 43.73 (1.722)	M41X1-6g 0.1R	36.11 (1.422) 35.86 (1.412)	41.28 (1.625) 41.03 (1.615)	51.7 (2.035) 50.7 (1.996)					AS3582-31
23	H	58.0 (2.283) 57.0 (2.244)	42.96 (1.691) 42.77 (1.684)	47.20 (1.858) 46.91 (1.847)	M44X1-6g 0.1R	39.26 (1.546) 39.01 (1.536)	44.45 (1.750) 44.20 (1.740)	54.8 (2.157) 53.8 (2.118)					AS3582-32
25	J	61.2 (2.409) 60.2 (2.370)	46.13 (1.816) 45.94 (1.809)	50.37 (1.983) 50.08 (1.972)	M47X1-6g 0.1R	42.46 (1.672) 42.21 (1.662)	47.63 (1.875) 47.38 (1.865)	58.0 (2.283) 57.0 (2.244)					AS3582-33

NOTES:
1. Dimensions are in millimeters.
2. Classes C, F, P, T, W, X and Z.
3. Classes K, S and R.
4. Insert can be recessed a max of 6.00 mm back of teeth.
5. Inch-pound conversion are provided in parenthesis for information only.
6. For details of connector front and rear end configuration, see procurement specification.
7. ** Part or Identifying Number (PIN) for each O-ring seal shall consist of the document number followed by the assigned shell size.

FIGURE 1. Receptacle, classes C, F, K, P, R, S, T, W, X and Z - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:52Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configurations: See figure 1.

Interface dimensions shall conform to MIL-DTL-38999.


This connector mates with the following:

Classes C, F, P, T, W, X and Z shall conform to MIL-DTL-38999/46 and MIL-DTL-38999/47.
Classes K, S and R shall conform to MIL-DTL-38999/46.

Main key color: Blue.

For insert arrangements: See MIL-STD-1560.

PIN example:

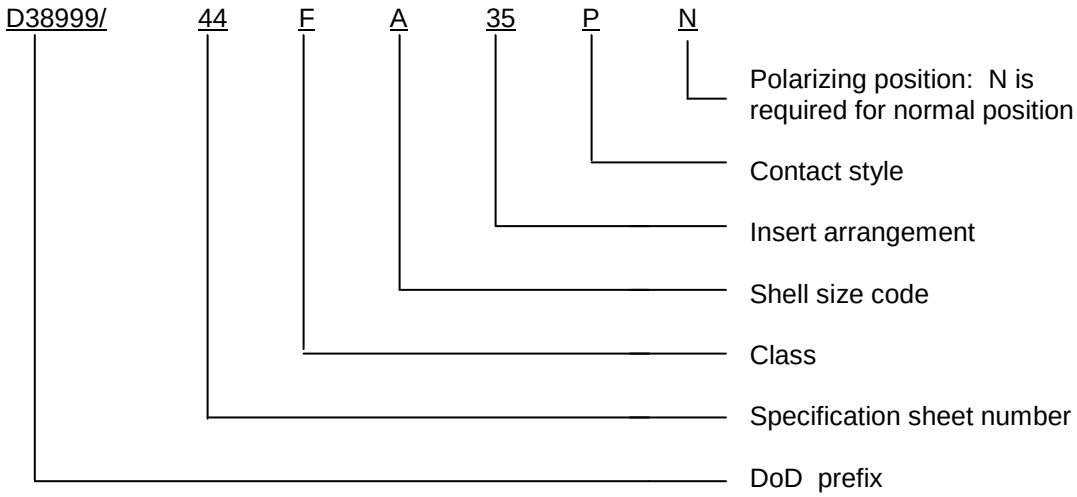

Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Referenced documents. In addition to MIL-DTL-38999, this document references the following:

MIL-DTL-38999/46
MIL-DTL-38999/47
MIL-STD-1560

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:52Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - AS
Air Force - 85
DLA - CC

Preparing activity:
DLA - CC

(Project 5935-2009-151)

Review activities:
Army - AR, MI
Navy - EC, MC, OS
Air Force - 19, 99

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:52Z
Check the source to verify that this is the current version before use.