METRIC


MIL-DTL-38999/44D
w/AMENDMENT 3
2 July 2024
SUPERSEDING
MIL-DTL-38999/44D
w/AMENDMENT 2
10 March 2020

DETAIL SPECIFICATION SHEET

# CONNECTORS, ELECTRICAL, CIRCULAR, RECEPTACLE, JAM-NUT MOUNTING, BREECH COUPLING, REMOVABLE CRIMP CONTACTS, SERIES IV, METRIC

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-38999.

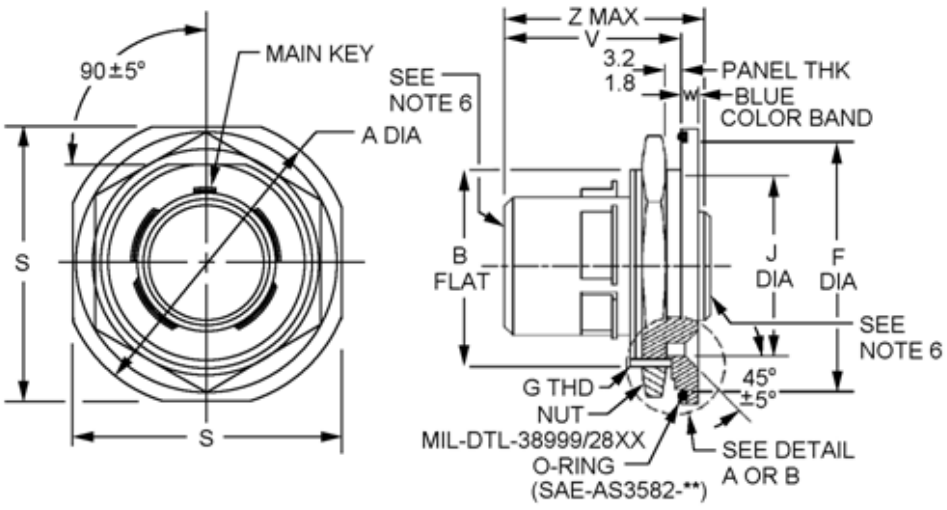



| mm | Inches |
|---|---|
| 1.8 | .07 |
| 3.2 | .13 |

FIGURE 1. Receptacle, classes C, F, K, R, S, T, W, X and Z.



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:52Z
Check the source to verify that this is the current version before use.

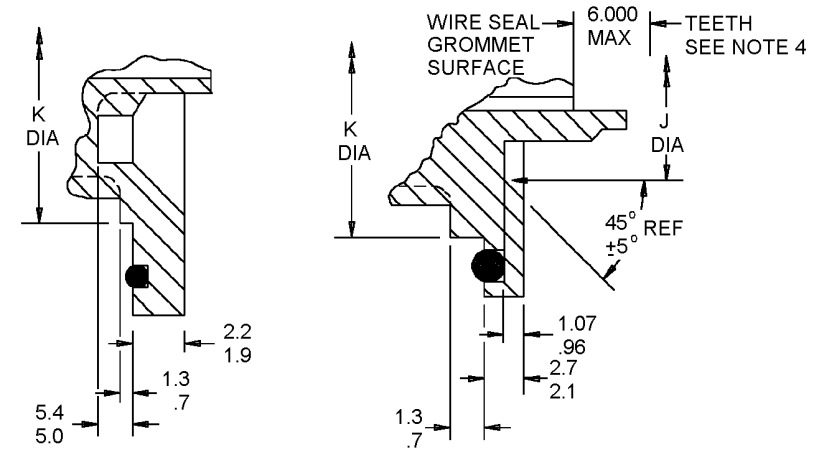


| mm | Inches |
|---|---|
| 0.70 | .03 |
| 0.96 | .04 |
| 1.07 | .04 |
| 1.3 | .05 |
| 1.9 | .07 |
| 2.1 | .08 |
| 2.2 | .09 |
| 2.7 | .11 |
| 5.0 | .20 |
| 5.4 | .21 |
| 6.9 | .27 |

FIGURE 1. Receptacle, classes C, F, K, R, S, T, W, X and Z - Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:52Z
Check the source to verify that this is the current version before use.

| Shell size | Shell size code | A dia | B flat | F dia | G thread plated | J dia | K dia | S | V | W | Z max (see note 2) | Z max (see note 3) |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 11 | B | 38.6 (1.520) 37.6 (1.480) | 23.93 (.942) 23.74 (.935) | 27.84 (1.096) 27.55 (1.085) | M25x1-6g 0.1R | 20.42 (.804) 20.17 (.794) | 25.40 (1.000) 25.15 (.990) | 35.4 (1.394) 34.4 (1.354) | 28.4 (1.118) 27.5 (1.083) | 2.7 (.106) 1.9 (.075) | 32.0 (1.260) | 39.5 (1.555) |
| 13 | C | 41.7 (1.642) 40.7 (1.602) | 27.08 (1.066) 26.89 (1.059) | 31.02 (1.221) 30.73 (1.210) | M28X1-6g 0.1R | 23.57 (.928) 23.32 (.918) | 28.58 (1.125) 28.33 (1.115) | 38.6 (1.520) 37.6 (1.480) | | | | |
| 15 | D | 44.9 (1.768) 43.9 (1.728) | 30.26 (1.191) 30.07 (1.184) | 34.19 (1.346) 33.90 (1.335) | M31X1-6g 0.1R | 26.56 (1.046) 26.31 (1.036) | 31.75 (1.250) 31.50 (1.240) | 41.7 (1.642) 40.7 (1.602) | | | | |
| 17 | E | 49.7 (1.957) 48.7 (1.917) | 33.56 (1.321) 33.37 (1.314) | 37.67 (1.483) 37.38 (1.472) | M34X1-6g 0.1R | 30.02 (1.182) 29.77 (1.172) | 34.92 (1.375) 34.67 (1.365) | 45.7 (1.799) 44.7 (1.760) | | | | |
| 19 | F | 51.7 (2.035) 50.7 (1.996) | 36.61 (1.441) 36.42 (1.434) | 40.85 (1.608) 40.56 (1.597) | M38X1-6g 0.1R | 32.91 (1.296) 32.66 (1.286) | 38.10 (1.500) 37.85 (1.490) | 48.5 (1.909) 47.5 (1.870) | | | | |
| 21 | G | 54.8 (2.157) 53.8 (2.118) | 39.78 (1.566) 39.59 (1.559) | 44.02 (1.733) 43.73 (1.722) | M41X1-6g 0.1R | 36.11 (1.422) 35.86 (1.412) | 41.28 (1.625) 41.03 (1.615) | 51.7 (2.035) 50.7 (1.996) | | | | |
| 23 | H | 58.0 (2.283) 57.0 (2.244) | 42.96 (1.691) 42.77 (1.684) | 47.20 (1.858) 46.91 (1.847) | M44X1-6g 0.1R | 39.26 (1.546) 39.01 (1.536) | 44.45 (1.750) 44.20 (1.740) | 54.8 (2.157) 53.8 (2.118) | | | | |
| 25 | J | 61.2 (2.409) 60.2 (2.370) | 46.13 (1.816) 45.94 (1.809) | 50.37 (1.983) 50.08 (1.972) | M47X1-6g 0.1R | 42.46 (1.672) 42.21 (1.662) | 47.63 (1.875) 47.38 (1.865) | 58.0 (2.283) 57.0 (2.244) | | | | |

NOTES:
1. Dimensions are in millimeters.
2. Classes C, F, T, W, X and Z.
3. Classes K, S and R.
4. Insert can be recessed a max of 6.00 mm back of teeth.
5. Inch equivalents are given for information only. Inch equivalents are in parentheses.
6. For details of connector front and rear end configuration, see procurement specification.

FIGURE 1. Receptacle, classes C, F, K, R, S, T, W, X and Z - Continued.

REQUIREMENTS:

Dimensions and configurations: See figure 1.

Interface dimensions shall conform to MIL-DTL-38999.



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:52Z
Check the source to verify that this is the current version before use.


This connector mates with the following:

Classes C, F, T, W, X and Z mate with MIL-DTL-38999/46 and MIL-DTL-38999/47.
Classes K, S and R mate with MIL-DTL-38999/46.

Main key color: Blue.

For insert arrangements: See MIL-STD-1560.

PIN example:

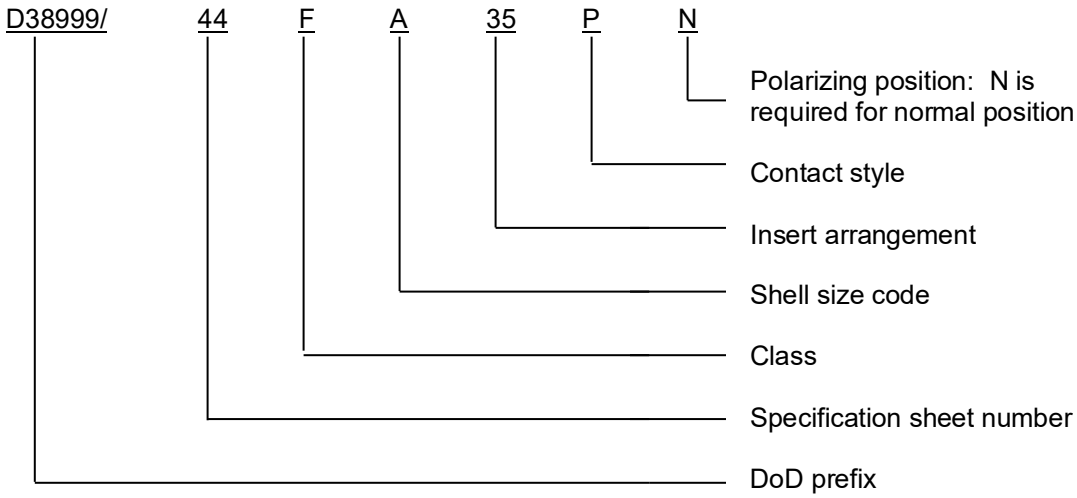


Amendment notations. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notation.

Referenced documents. In addition to MIL-DTL-38999, this document references the following:

MIL-DTL-38999/46
MIL-DTL-38999/47
MIL-STD-1560



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:52Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - AS
Air Force - 85
DLA - CC

Preparing activity:
DLA - CC

(Project 5935-2024-145)

Review activities:
Army - AR, MI
Navy - EC, MC, OS
Air Force – 19

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:52Z
Check the source to verify that this is the current version before use.