
MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, CIRCULAR, MINIATURE, HIGH DENSITY, QUICK DISCONNECT (BAYONET, THREADED, AND BREECH COUPLING), ENVIRONMENT RESISTANT, REMOVABLE CRIMP AND HERMETIC SOLDER CONTACTS, RECEPTACLE, SOLDER MOUNTING, HERMETIC, BREECH COUPLING, HERMETIC SOLDER CONTACTS, SERIES IV, METRIC

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE.

THE COMPLETE REQUIREMENTS FOR PROCURING THE CONNECTORS DESCRIBED HEREIN SHALL CONSIST OF THIS DOCUMENT AND THE LATEST ISSUE OF SPECIFICATION MIL-C-38999.

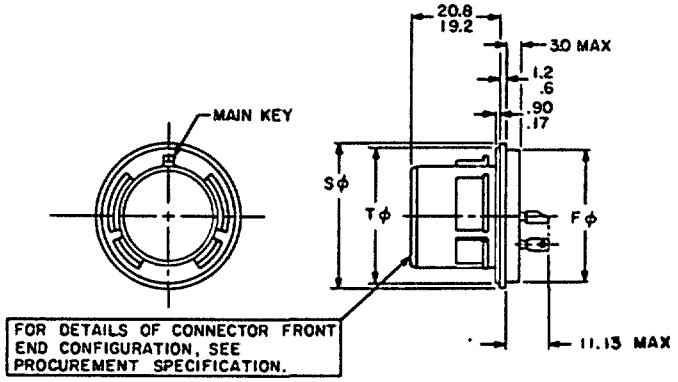

SHELL SIZE	SHELL SIZE CODE	FØ MAX	SØ MAX	TØ
11	B	19.9	21.9	20.15 19.76
13	C	23.1	25.1	23.35 22.96
15	D	26.3	28.2	26.52 26.13
17	E	29.4	31.4	29.72 29.33
19	F	31.8	33.8	32.87 32.48
21	G	35.0	37.0	36.05 35.66
23	H	38.2	40.2	39.22 38.83
25	J	41.4	43.3	42.40 42.01

NOTE: 1. DIMENSIONS ARE IN MILLIMETERS.

FIGURE 1. RECEPTACLE, CLASSES H AND Y.

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:53Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

DIMENSIONS AND CONFIGURATIONS: SEE FIGURE 1. INTERFACE DIMENSIONS SHALL CONFORM TO MIL-C-38999.

THIS CONNECTOR MATES WITH: DOD-C-38999/46 AND /47.

MAIN KEY COLOR: BLUE

FOR INSERT ARRANGEMENTS: SEE MIL-STD-1560.

PART NUMBER EXAMPLE: D38999/ 45 N B 35 P N

- DOD NO. PREFIX
- SPECIFICATION SHEET NO.
- CLASS
- SHELL SIZE CODE
- INSERT ARRANGEMENT
- CONTACT STYLE
  - P - PIN, SOLDER, CUP. AVAILABLE IN CONTACT SIZES 22D, 20, 16, AND 12.
  - X - PIN, EYELET. AVAILABLE IN CONTACT SIZES 20 AND 16 ONLY.
- POLARIZING POSITION
  - "N" IS REQUIRED FOR NORMAL POSITION

CUSTODIANS:
ARMY - CR
NAVY - AS
AIR FORCE - 85

PREPARING ACTIVITY:
NAVY - AS

PROJECT NO. 5935-3139-3

REVIEW ACTIVITIES:
ARMY - AR, MI
NAVY - EC, OS, MS
AIR FORCE - 11,15,17,99
DLA - ES

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:53Z
Check the source to verify that this is the current version before use.