METRIC


MIL-DTL-38999/48B
w/AMENDMENT 1
2 July 2024
SUPERSEDING
MIL-DTL-38999/48B
5 February 2014

DETAIL SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, CIRCULAR, RECEPTACLE, WELD MOUNTING, HERMETIC, BREECH COUPLING, HERMETIC SOLDER CONTACTS, SERIES IV, METRIC

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-38999.

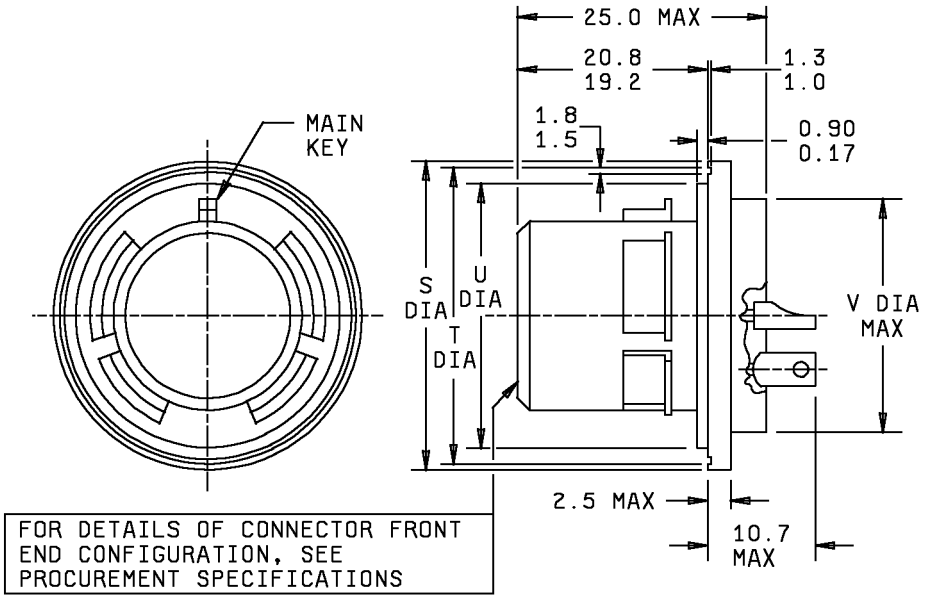

mm	Inches	mm	Inches	mm	Inches	mm	Inches
0.17	.007	1.3	.05	2.5	.10	20.8	.82
0.90	.035	1.5	.06	10.7	.42	25.0	.98
1.0	.040	1.8	.07	19.2	.76		

FIGURE 1. Receptacle, classes N and Y.

AMSC N/A FSC 5935

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:54Z
Check the source to verify that this is the current version before use.

Shell size	Shell size code	S dia	T dia	U dia	V dia max
11	B	28.1 / 27.8 (1.11 / 1.09)	26.3 / 26.0 (1.04 / 1.02)	20.15 / 19.76 (.79 / .78)	15.88 (.63)
13	C	31.3 / 31.0 (1.23 / 1.22)	29.5 / 29.2 (1.16 / 1.15)	23.35 / 22.96 (.92 / .90)	19.05 (.75)
15	D	34.5 / 34.2 (1.36 / 1.35)	32.7 / 32.4 (1.29 / 1.28)	26.52 / 26.13 (1.23 / 1.22)	23.01 (.91)
17	E	36.7 / 36.4 (1.44 / 1.43)	34.9 / 34.6 (1.37 / 1.36)	29.72 /29.33 (1.17 / 1.15)	25.81 (1.02)
19	F	40.4 / 40.1 (1.59 / 1.58)	38.6 / 38.3 (1.52 / 1.51)	32.87 /32.48 (1.29 / 1.28)	28.98 (1.14)
21	G	44.0 / 43.7 (1.73 / 1.72)	42.2 / 41.9 (1.66 / 1.65)	36.05 /33.66 (1.42 / 1.33)	32.16 (1.27)
23	H	48.2 / 47.9 (1.90 / 1.89)	46.4 / 46.1 (1.83 / 1.81)	39.22 / 38.83 (1.54 / 1.53)	34.93 (1.38)
25	J	50.4 / 50.1 (1.98 / 1.97)	48.6 / 48.3 (1.91 / 1.90)	42.40 / 42.01 (1.67 / 1.65)	37.69 (1.48)

NOTES:
1. Dimensions are in millimeters.
2. Inch equivalents are given for information only.


FIGURE 1. Receptacle, classes N and Y – Continued.

REQUIREMENTS:

Dimensions and configurations: See figure 1.
Interface dimensions shall conform to MIL-DTL-38999.
This connector mates with MIL-DTL-38999/46 and /47.
Main key color: Blue.
For insert arrangements: See MIL-STD-1560.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:54Z
Check the source to verify that this is the current version before use.

Part or Identifying Number (PIN) example:

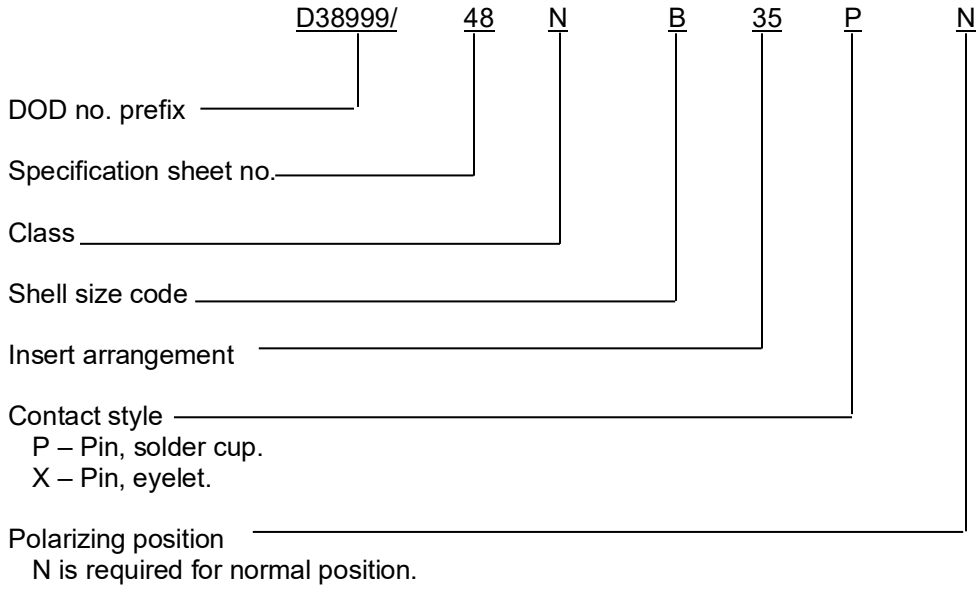

For contact termination: See MIL-DTL-38999.

Amendment notations. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Referenced documents. In addition to MIL-DTL-38999, this document references the following:

MIL-DTL-38999/46
MIL-DTL-38999/47
MIL-STD-1560

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:54Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army – CR
Navy - AS
Air Force – 85
DLA - CC

Preparing activity:
DLA - CC

(Project 5935-2024-147)

Review activities:
Army - AR, MI
Navy - EC, MC, OS
Air Force - 19

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:54Z
Check the source to verify that this is the current version before use.