METRIC


MIL-DTL-38999/52
22 May 2003

DETAIL SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, CIRCULAR, COVER, PROTECTIVE, RECEPTACLE, MIL-DTL-38999 SERIES IV

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification and MIL-DTL-38999.

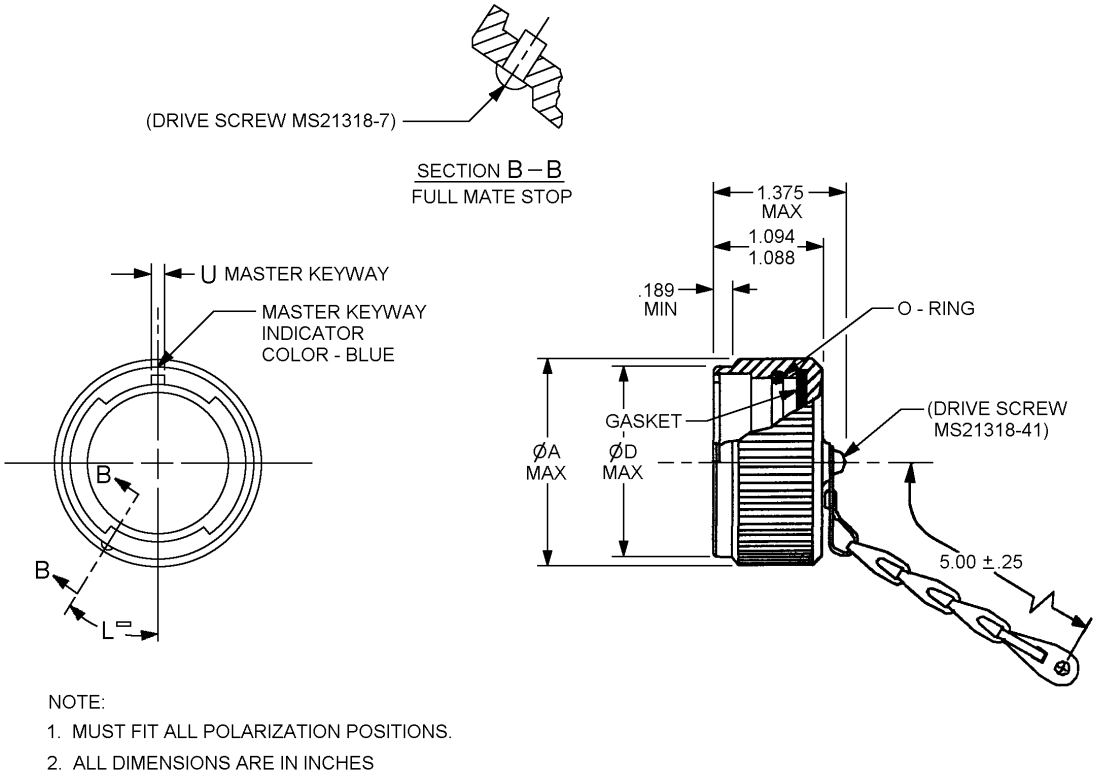

NOTE:
1. MUST FIT ALL POLARIZATION POSITIONS.
2. ALL DIMENSIONS ARE IN INCHES

FIGURE 1. Protective cover, receptacle, all classes.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:56Z
Check the source to verify that this is the current version before use.

Dimensions				
Shell size	ØA max	ØD max	L°	U min
11	.922	.775	21°	.113
13	1.047	.900	23°	
15	1.219	1.040		.133
17	1.344	1.150	25°	
19	1.469	1.275		.153
21	1.579	1.400		
23	1.704	1.525		.173
25	1.829	1.650		

NOTES:
1. Dimensions are in millimeters, except “A threads” which are in inches.
2. Method of attachment to cover and or ring is optional.

FIGURE 1. Protective cover, plug, all classes - Continued

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Material:

Cover - Classes C, F, G, R, W and X: Impact extruded or machined aluminum alloy.
Classes H, K, N, S and Y: Corrosion resistant steel.
Classes J and M: High performance resin in accordance with MIL-DTL-38999.
(Class F is inactive for new design.)

Gasket - Silicone elastomer.

Ring - Corrosion resistant steel, passivated, 1.020 maximum thickness.

Rope - Insulated stainless steel, passivated.
Insulation shall withstand 200°C environment.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:56Z
Check the source to verify that this is the current version before use.

Fastener - Stainless steel, passivated.
Option: Aluminum integral to cover.


Mating connectors: MIL-DTL-38999, series IV.

Gasket shall be bonded to cover, or mechanically retained.

Rope shall rotate freely on fastener.

Fastener tensile strength: Both axial and longitudinal directions shall be 25 pounds. The load shall be applied to the end of the rope.

Part or Identifying Number (PIN) example:

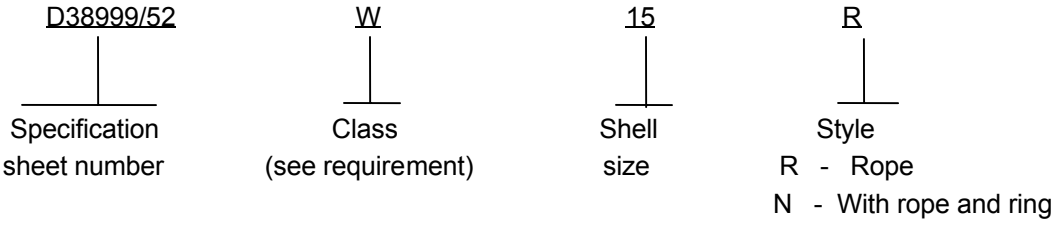

Qualification:
Examination of product.
Mating and unmating forces.
Humidity
Salt spray (corrosion).
Fastener tensile strength (see requirement).
Altitude immersion.

For classes J and M also perform temperature cycling and hydrolytic stability.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - AS
Air Force – 11
DLA - CC

Review activities:
Army - MI
Navy - EC, MC, OS
Air Force - 19, 99

Preparing activity:
DLA - CC

(Project 5935-4571)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:56Z
Check the source to verify that this is the current version before use.