METRIC

MIL-DTL-38999/61A
20 September 2019
SUPERSEDING
MIL-DTL-38999/61
15 December 2004

DETAIL SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, CIRCULAR, RECEPTACLE, THREADED, WALL MOUNTING FLANGE, REMOVABLE CRIMP CONTACTS, FIBER OPTIC TERMINI, TIGHT TOLERANCE, SERIES III, SHELL SIZE 25, METRIC

Inactive for new design after 20 September 2019. This document is stabilized for a period of 10 years from the date of this revision. No QPL sources exist as of the date of this revision. Technical change proposals will only be considered when a potential source requests authorization to qualify to this document.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-38999.

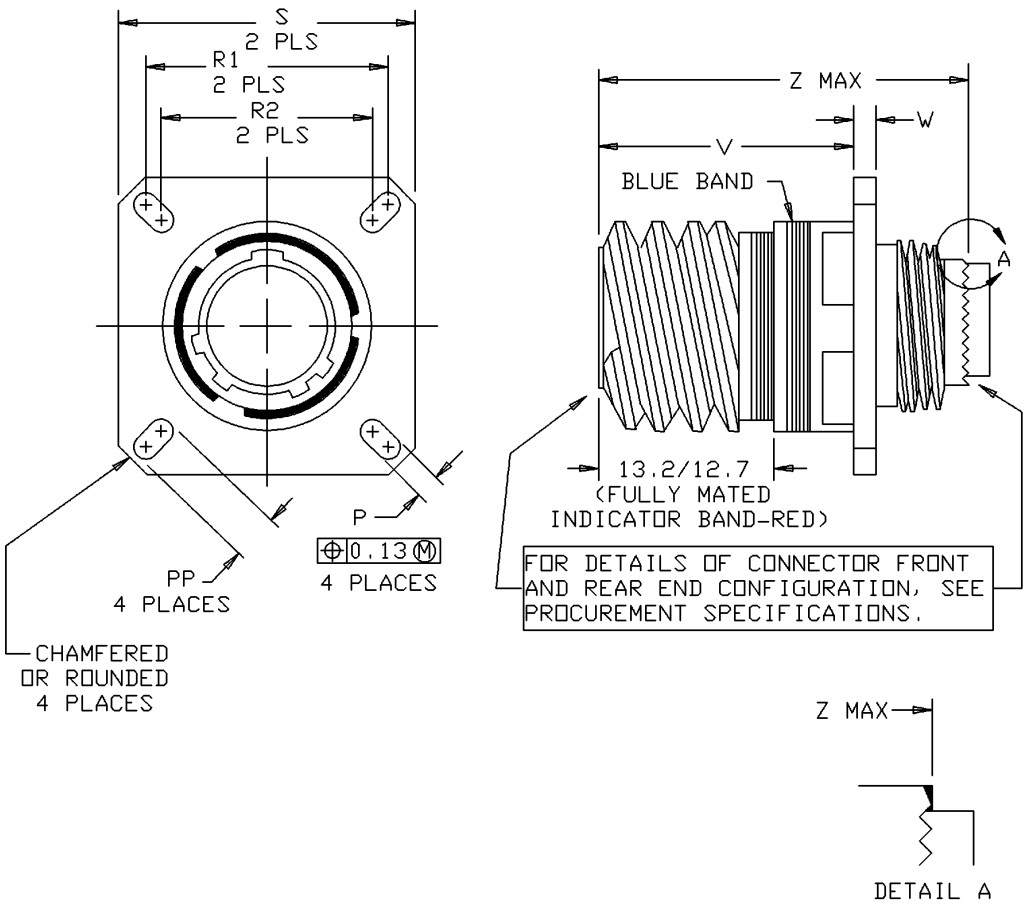


FIGURE 1. Receptacle, fiber optic.

AMSC N/A

FSC 5935


Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:56Z
Check the source to verify that this is the current version before use.

Dimensions						
Shell size	Shell size code	P ± 0.20	PP ± 0.20	R1 (see note 2)	R2 (see note 3)	S ± 0.30
25	J	3.91	6.15	38.10	34.93	46.00

Dimensions				
Shell size	Shell size code	V + 0.00 - 0.13	W	Z max
25	J	20.07	3.20/2.10	31.50

FIGURE 1. Receptacle, fiber optic – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:56Z
Check the source to verify that this is the current version before use.

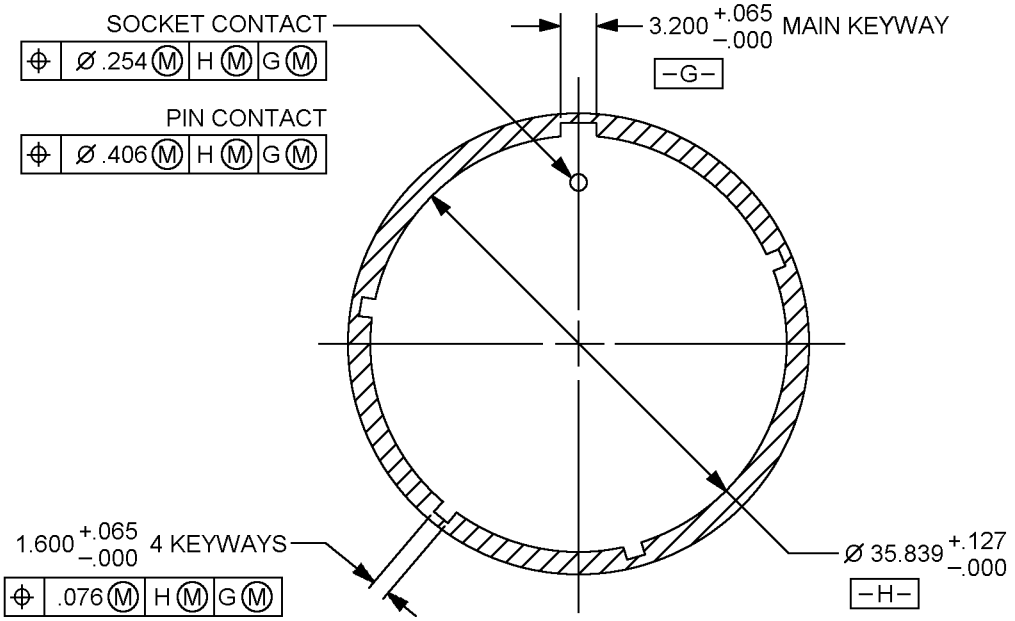

RECEPTACLE FRONT

KEYING DIMENSIONS

mm	Inches	mm	Inches	mm	Inches	mm	Inches
0.065	.0025	0.30	.012	3.91	.154	31.50	1.24
0.076	.003	0.406	.016	6.15	.242	34.93	1.375
0.127	.005	1.600	.063	12.7	.5	35.839	1.41
0.13	.0051	2.10	.083	13.2	.52	38.10	1.5
0.20	.008	3.200	.126	20.07	.79	46.0	1.81
0.254	.01						

NOTES:

1. Dimensions are in millimeters. Inch-pound equivalents are given for information only.
2. Front or rear panel mounting
3. Front panel mounting only.

FIGURE 1. Receptacle, fiber optic – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:56Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Interface dimensions shall conform to MIL-DTL-38999.

The connectors described by this slash sheet shall meet all applicable requirements of MIL-DTL-38999.

The connectors described by this slash sheet are non-plated stainless steel connectors.

This connector mates with MIL-DTL-38999/60.

Insert arrangements shall be in accordance with MIL-STD-1560.

Connector accessories shall be in accordance with SAE-AS85049.

Fiber Optic Termini shall be in accordance with MIL-PRF-29504/4 and MIL-PRF-29504/5.

Electrical contacts shall be in accordance with SAE-AS39029.

Shell size 25 keying dimensions shall be in accordance with figure 1.

Coupling torque shall be in accordance with MIL-DTL-38999 for series III, except that it shall not exceed 130 pound-force inch (14.69 Newton-meters) when all size 16 cavities are filled with MIL-PRF-29504/4 and MIL-PRF-29504/5 termini.

Firewall barrier requirements are not applicable for these connectors.

QUALIFICATION:

The connectors described by this slash sheet shall meet the applicable qualification requirements of MIL-DTL-38999, series III, except all size 16 cavities shall be filled with fiber optic termini.


For groups A and B conformance inspections, the high precision dimensions shall be inspected 100% or verified during in-process inspections.

The connectors described by this slash sheet shall be supplied without electrical contacts or fiber optic termini. The design shall specify the contacts and termini separately.

Connectors where a pin contact is specified in the Part or Identifying Number (PIN) (for example: M38999/60KJ29AN or M38999/60KJ29PN) should be supplied with a pin contact insert (see figure 1). Also, connectors where a socket contact is specified in the PIN (for example: M38999/60KJ29BN or M38999/60KJ29SN) should be supplied with a socket contact insert (see figure 1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:56Z
Check the source to verify that this is the current version before use.

PIN example (M38999/61KJ29AN):

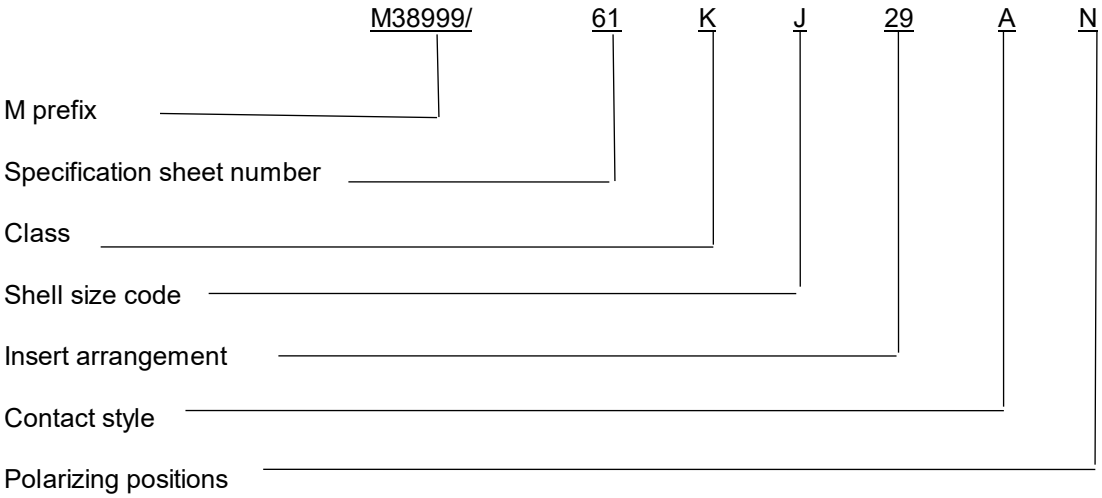

N is required for normal position

NOTE: The term PIN is equivalent to the term (part number, identification number, and type designator) which was previously used in this specification.

Changes from previous issue. The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the previous issue.

Referenced documents. In addition to MIL-DTL-38999, this document references the following:

MIL-DTL-38999/60
MIL-STD-1560
MIL-PRF-29504/4
MIL-PRF-29504/5
SAE-AS39029
SAE-AS85049

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:56Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army – CR
Navy – AS
Air Force – 85
DLA – CC

Preparing activity:
DLA – CC

(Project 5935-2019-118)

Review activities:
Army – AR, MI
Navy – EC, MC, OS
Air Force – 19

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T15:56Z
Check the source to verify that this is the current version before use.