MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRIC, RECTANGULAR, HIGH DENSITY, POLARIZED CENTER JACKSCREW, INTERFACIAL SEAL, PLUG, SOLDER PIN CONTACTS, CLASS SE

INACTIVE FOR NEW DESIGN AS OF 1 OCTOBER 1986 ©

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the connectors described herein shall consist of this specification and the latest issue of MIL-C-28804.

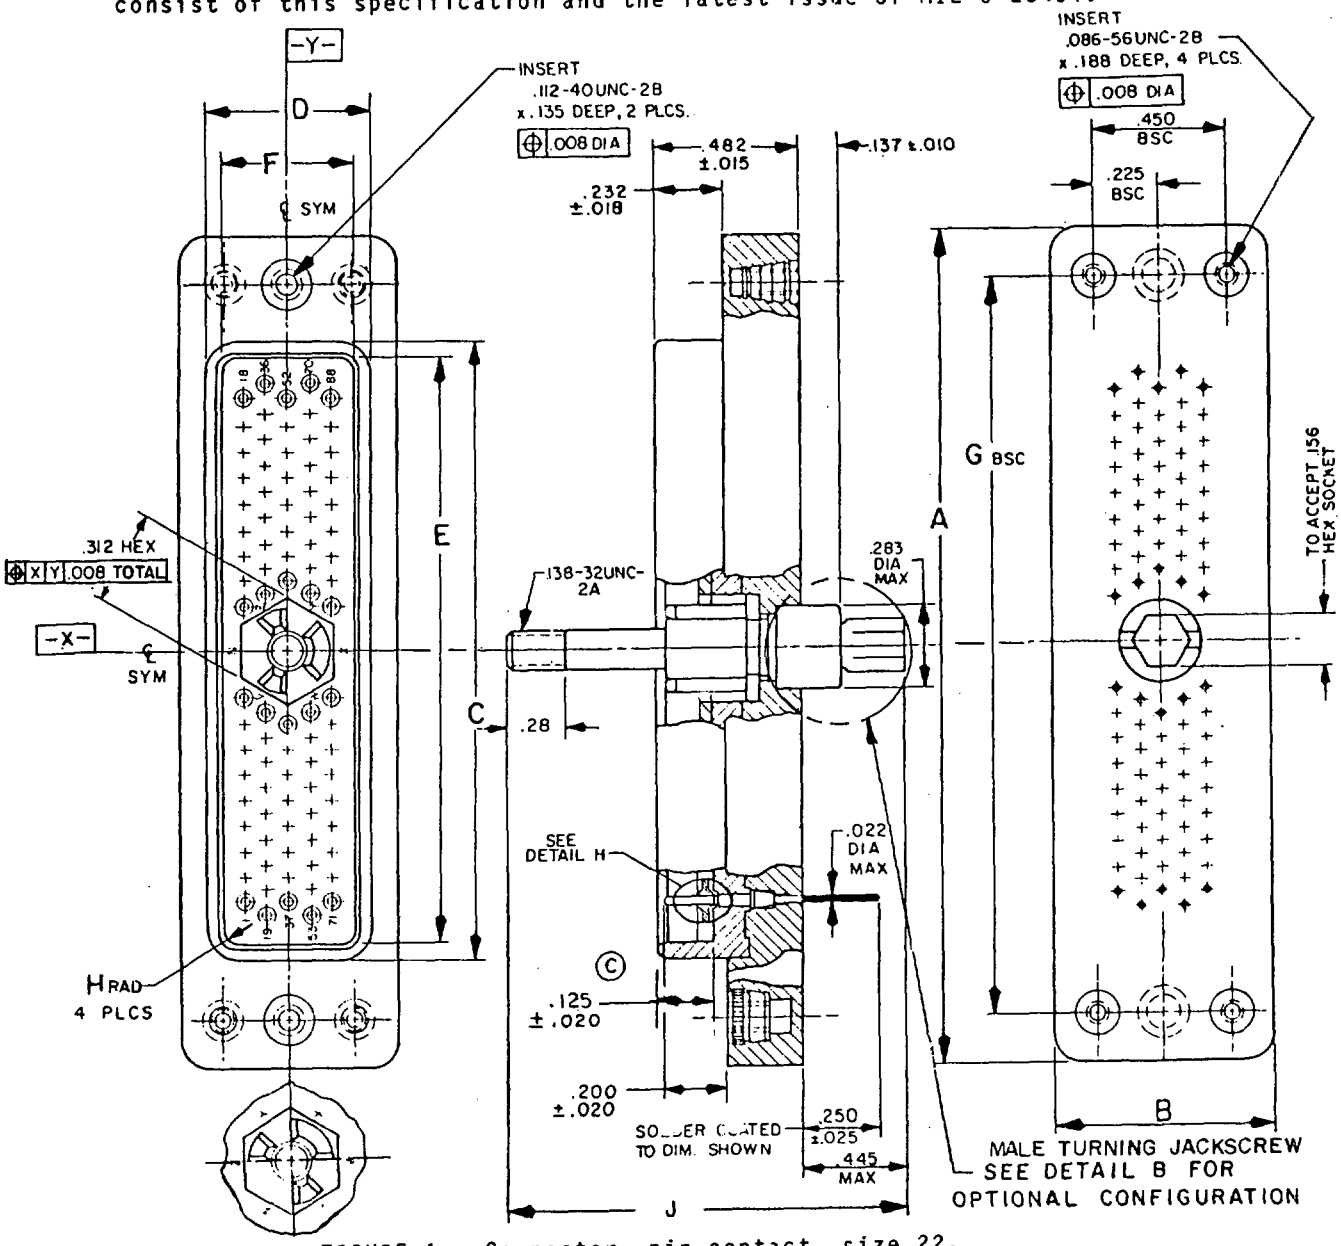


FIGURE 1. Connector, pin contact, size 22.


© Denotes change

FSC 5935


AMSC N/A

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:06Z
Check the source to verify that this is the current version before use.

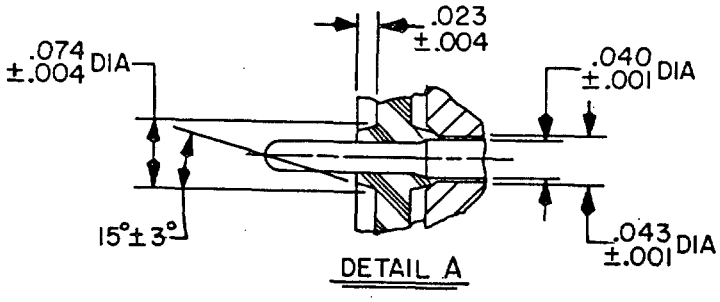

DETAIL A



MALE FIXED JACKSCREWS

DETAIL B

Inches	mm	Inches	mm	Inches	mm
.001	0.03	.225	5.72	1.220	30.99
.008	0.20	.232	5.89	1.332	33.83
.010	0.25	.250	6.35	1.360	34.54
.015	0.38	.28	7.1	1.444	36.68
.018	0.46	.283	7.19	1.520	38.61
.020	0.51	.312	7.92	1.625	41.28
.022	0.56	.436	11.07	1.718	43.64
.025	0.64	.334	11.30	1.945	49.40
.040	1.02	.450	11.43	1.948	49.48
.043	1.09	4.82	12.24	1.956	49.68
.050	1.27	.548	13.92	1.990	50.55
.058	1.47	.620	15.75	2.060	52.32
.086	2.18	.688	17.48	2.068	52.53
.100	2.54	.725	18.42	2.460	62.48
.112	2.84	.732	17.59	2.470	62.74
.135	3.43	.785	19.94	2.780	70.61
.137	3.48	.800	20.32	2.790	70.87
.138	3.51	.897	22.78	3.294	83.67
.156	3.96	.902	22.91	3.406	86.51
.188	4.78	1.077	27.36	3.808	96.72
.195	4.95	1.108	28.14	4.128	104.85
.200	5.08	1.200	30.48		

FIGURE 1. Connector, pin contacts, class SE - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:06Z
Check the source to verify that this is the current version before use.

Dash no. 1/ 2/	Shell size	No. of contacts	Insert arrangement no. 3/	A ±.015	B ±0.15	C ±.005	D ±.005	E ±.005	F ±.005	G BSC	H ±.005	J ±.025	Weight (max) (w/contacts)
1	8	14	Section 10 No. 1	1.520	.725	.800	.548	.688	.436	1.200	.050	1.360	13.5 grams
2	10	38	Section 20 No. 1	1.945	.725	1.200	.548	1,108	.436	1.625	.050		20.0
3	12	88	Section 30 No. 1	2.780	.725	2.060	.548	1.948	.436	2.460	.050		27.0
4	14	108	Section 40 No. 1	1.990	1.077	1.444	.897	1.332	.785	1.718	.058		33.5
5	16	132	Section 50 No. 1	2.790	.902	.068	.732	1.956	.620	2.470	.100		38.5
6	18	244	Section 60 No. 1	4.128	.902	3.406	.732	3.294	.620	3.808	.100	1.360	47.0
7	8	14	Section 10 No. 1	1.520	.725	.800	.548	6.88	.436	1.200	.050	.898	13.5
8	10	38	Section 20 No. 1	1.945	.725	1.220	.548	1.108	.436	1.625	.050		20.0
9	12	88	Section 30 No. 1	2.780	.725	2.060	.548	1.948	.436	2.460	.050		27.0
10	14	108	Section 40 No. 1	1.990	1.077	1.444	.897	1.332	.785	1.718	.058		33.5
11	16	132	Section 50 No. 1	2.790	.902	2.068	.732	1.956	.620	2.470	.100		38.5
12	18	244	Section 60 No. 1	4.128	.902	3.406	.732	3.294	.620	3.808	.100	.898	47.0 grams

1/ Dash number shall include N, V, W, X, Y, or Z to indicate polarization.
2/ Dash numbers 1 thru 6 are supplied with male turning jackscrews; dash numbers 7 thru 12 are supplied with male fixed jackscrews.
3/ For insert arrangements, see MIL-STD-1632.

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.

FIGURE 1. Connectors, pin contacts, class SE - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:06Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Interface seal: A resilient interfacial seal shall be assembled onto the pin contacts but is not bonded onto the face of the pin insert.

Mating end of the contacts: Shall be in accordance with MIL-C-28804/9.

Mating connectors: M28804/11-1 thru -6 mate with M28804/1-1 thru -6, M28804/3-1 thru -6, M28804/5-1 thru -6, M28804/7-1 thru -6. M28804/11-7 thru -12 mate with M28804/1-7 thru -12, M28804/3-7 thru -12, M28804/5-7 thru -12, and M28804/7-7 thru -12.

Part number: M28804/11- (dash number from figure 1).

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Army - AT, MI
Navy - AS
Air Force - 85, 99
DLA - ES

User activities:
Army - AM, AR, ME
Navy - MC

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5935-3546-11)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:06Z
Check the source to verify that this is the current version before use.