
MILITARY SPECIFICATION SHEET

CABLES, RADIO FREQUENCY, COAXIAL, SEMIRIGRID, CORRUGATED OUTER CONDUCTOR, FOAM DIELECTRIC, 1/2 INCH, NOMINAL 50 OHMS

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the cable described herein shall consist of this document and the latest issue of Specification MIL-C-28830.

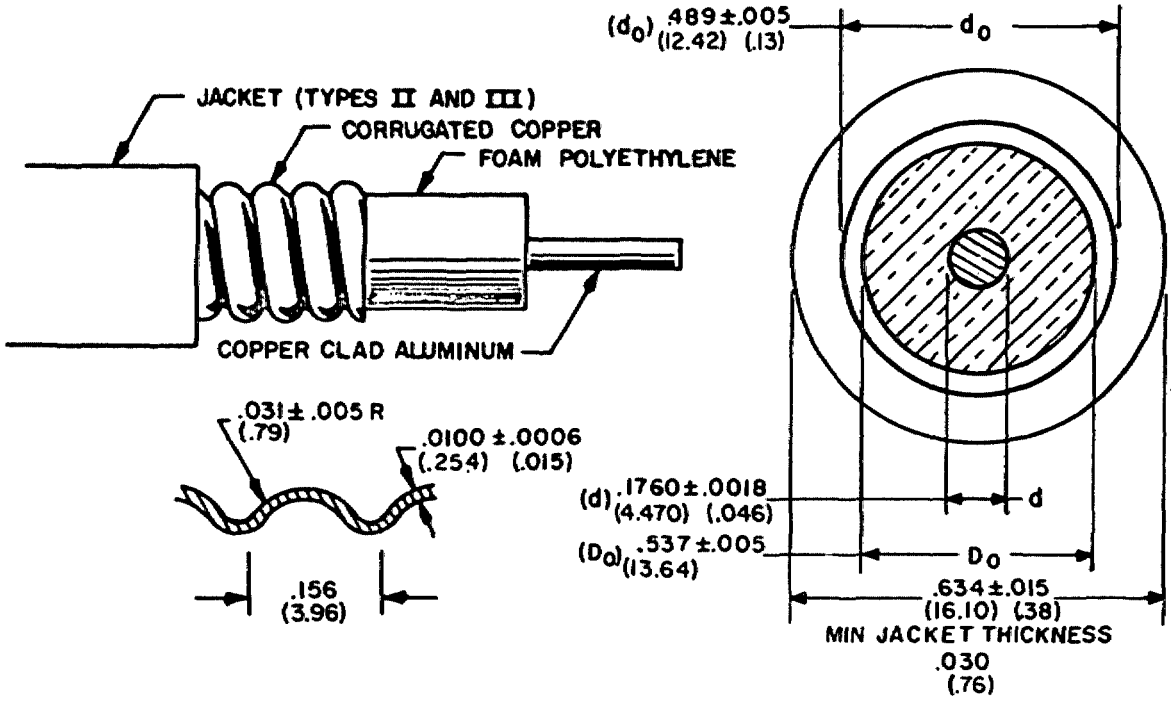

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Metric equivalents are in parentheses.

FIGURE 1. Cable configuration.

FSC 6145

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:19Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Mandrel diameter: 14 inches maximum.

Test cable length: 15 feet (ft) minimum.

Attenuation: 1.8 dB/100 ft at 400 MHZ, 6.5 dB/100 ft at 3 GHz, 30 dB/100 ft at 8 GHz.

Velocity of propagation: 80.8 percent nominal.

Capacitance: 25.1 pF/ft nominal.

Impedance: 50 ±2 ohms.

Voltage standing wave ratio (VSWR): 1.30 maximum.

VSWR frequency range: 100 MHz to 8 GHz for qualification.

Quality conformance: Check from 20 Hz to 8 GHz.

Weight: 0.153 lb/ft.

DWV: 8000 Vdc 4500 rms at 60 cycles.

Spark test: 6000

Part numbers:

M28330/1-II,

M28330/1-III.

Custodian:
Navy - EC
Air Force - 85

Review activities:
Navy - AS, MC
Air Force - 99
DLA - ES, IS

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 6145-0714-1)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:19Z
Check the source to verify that this is the current version before use.