INCH-POUND
MIL-DTL-28827/1B
4 October 2004
SUPERSEDING
MIL-S-28827/1A
20 November 1990


DETAIL SPECIFICATION SHEET

SWITCH, THERMOSTATIC VOLATILOE LIQUID), HERMETIC SEALED, SINGLE POLE DOUBLE THROW (SPDT), MEDIUM RESPONSE TIME

Inactive for new design after 8 March 1999.

This specification is approved for use by all Departments and Agencies of the Department of Defense.


The complete requirements for acquiring the switches described herein shall consist of this specification and the latest issue of MIL-DTL-28827.

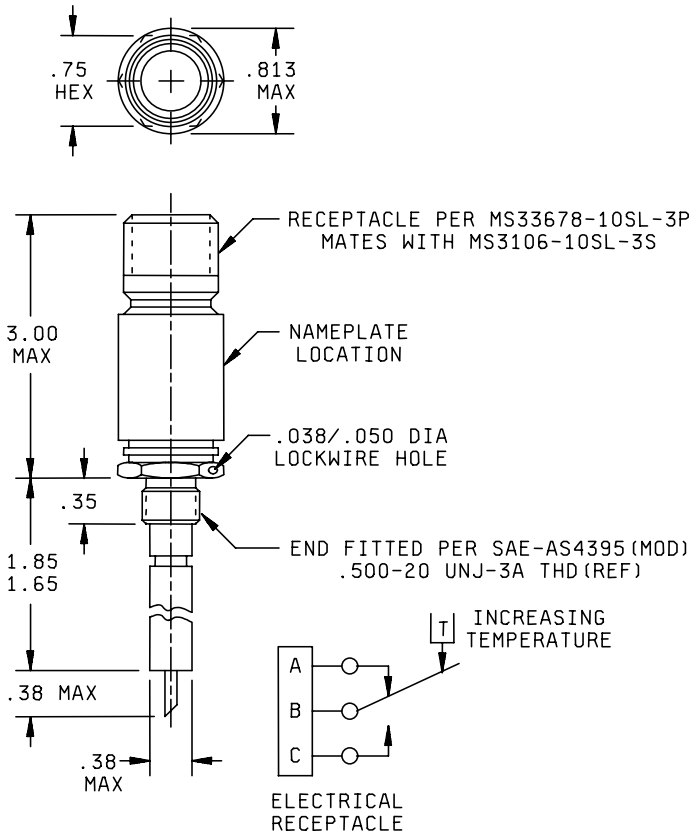

NOTES:
1. Dimensions are in inches.
2. Unless otherwise specified tolerances are ±.005.

FIGURE 1. Configuration I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:17Z
Check the source to verify that this is the current version before use.

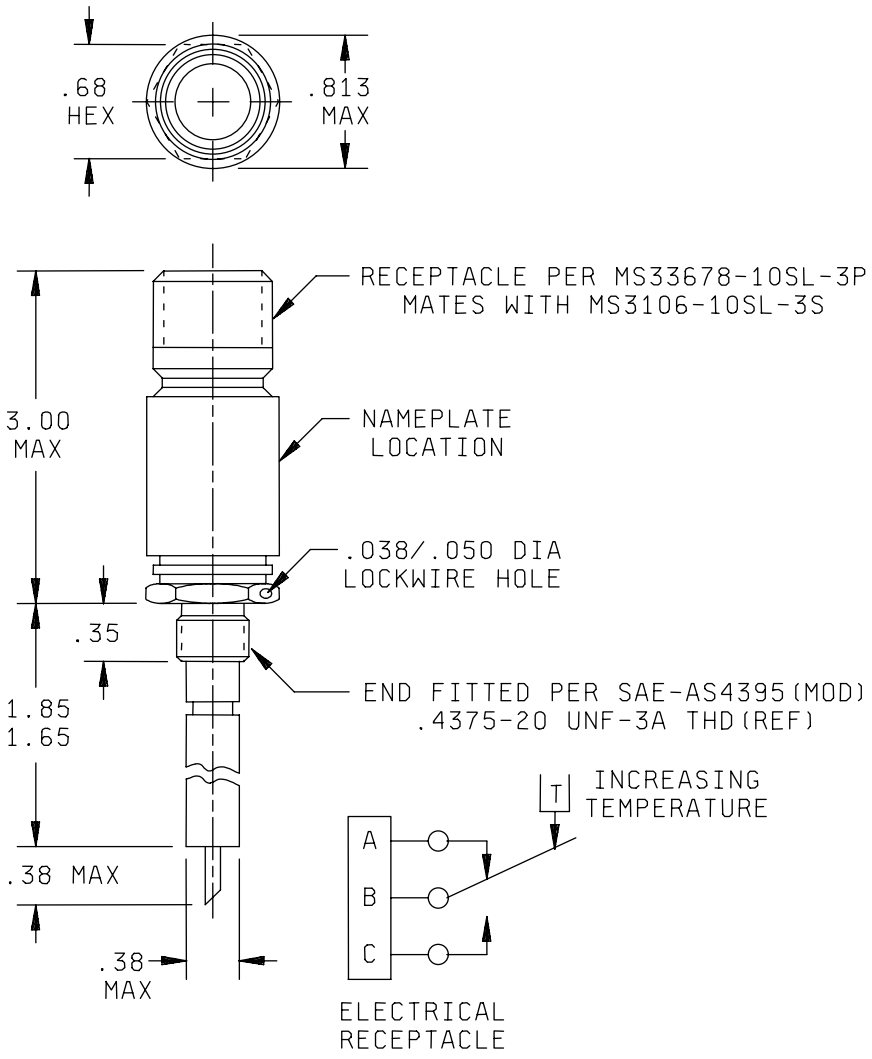

NOTES:
1. Dimensions are in inches.
2. Unless otherwise specified tolerances are ±.005.

FIGURE 2. Configuration II.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:17Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions, configurations, and electrical schematic: See figure 1 and 2.

Weight: 2 ounces approximately

Calibration: See tables I, II, III, IV, and V.

Proof pressure: 3,000 psig.

Proof temperature: 100°F above the maximum increasing set point.

Time constant: Not to exceed 10 seconds in 75 centistokes, oil at 150 ft/min.

Electrical ratings:

Operating voltage: 28±5 V dc.

Current rating: .080 to 1.0 amps resistive.

Seal: Electrical chamber hermetic.

Media: MIL-PRF-6083

High temperature: (Ambient operating and non-operating): (+275°F).

Low temperature: (Ambient operating and non-operating): (-65°F).

Altitude: C(80,000 ft).

Shock: M(100 g's).

Vibration: S(test condition D, method 204 of MIL-STD-202).

Endurance: B(25,000 cycles).

Materials: All wetted materials shall be 300 series stainless steel. Non-wetted external parts shall be suitably protected against corrosion.

Part or Identifying Number (PIN):

Note: Design limitations (actuation values and tolerances, deadband and deactuation values and tolerances) should be coordinated with a manufacturer (s) listed on the QPL for this sheet before specifying a particular "M" number. The fact that operating characteristics can be coded does not necessarily mean that it can be manufactured or procured.

M28827/1-	A	C	D	A	B
Specification sheet number	Configuration and setting code (see table I)	High temperature setting to within 20°F (see table II) or low end of differential setting (see table V)	High temperature setting to within 2°F and tolerance (see table III or table IV) or high end differential setting (see table V)	Low temperature setting to within 20°F (see table II) or low end differential setting (see table V)	Low temperature setting to within 2°F and tolerance (see table III or table IV) or high end differential setting (see table V)

Example of PIN:
M28827/1-ACDAB identifies a switch of configuration 1 which actuates on increasing temperature at 146°F ± 5°F and deactuates at 102°F ± 5°F.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:17Z
Check the source to verify that this is the current version before use.

TABLE I. Code characters for combinations of configurations and temperature setting modes.

High Setting	Low Setting	Configuration	
		1	2
At 1/	At 1/	A	J
At 1/	By 2/	B	K
At 1/	Differential 3/	C	L
By 2/	At 1/	D	M
By 2/	By 2/	E	N
By 2/	Differential 3/	F	P
Differential 3/	At 1/	G	Q
Differential 3/	By 2/	H	R

1/ Setting values are designated by characters from tables II and III.
2/ Setting values are designated by characters from tables II and IV.
3/ Setting values are designated by characters from table V.

TABLE II. Temperature setting to within 20°F.

Temperature	Code
100	A
120	B
140	C
160	D
180	E
200	F
220	G
240	H
260	J
280	K
300	L
320	M
340	N
360	P
380	Q
400	R
420	S
440	T
460	U
480	V
500	W

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:17Z
Check the source to verify that this is the current version before use.

TABLE III. Temperature setting within2°F and tolerance.

Unit	Tolerance		
	±5	±10	±25
0	A	L	W
2	B	M	X
4	C	N	Y
6	D	P	Z
8	E	Q	1
10	F	R	2
12	G	S	3
14	H	T	4
16	J	U	5
18	K	V	6

Table IV. Temperature setting to within 2°F.

Unit	Maximum or minimum
0	A
2	B
4	C
6	D
8	E
10	F
12	G
14	H
16	J
18	K

TABLE V. Code letters for differentials temperature settings.

Code letter	Differential temperature (°F)
A	0
B	5
C	10
D	15
E	20
F	25
G	30
H	35
J	40
K	45
L	50
M	60
N	75

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:17Z
Check the source to verify that this is the current version before use.

Referenced Documents:

MIL-DTL-28827	MIL-PRF-6083
MIL-STD-202	MS3106
MS33678	SAE-AS4395

Custodians:
Army - CR
Navy - EC
Air Force - 11
DLA - CC

Preparing activity:
DLA- CC

(Project number 5930-1833)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at www.dodssp.daps.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:17Z
Check the source to verify that this is the current version before use.