MILITARY SPECIFICATION

FILTER UNIT, NOTCH

This amendment forms a part of Military Specification MIL-F-28821(EC), dated 28 August 1975.

PAGE 1

2.1, SPECIFICATIONS, MILITARY: Delete "MIL-S-901-Shock Test, H.I. (High-Impact); Shipboard Machinery, Equipment and Systems Requirement for".

2.1, SPECIFICATIONS, MILITARY, MIL-E-16400, title: Delete and substitute "Electronic, Interior Communication, and Navigation Equipment, Naval Ship and Shore: General Specification For".

PAGE 2

2.1, STANDARDS, MILITARY: Delete "MIL-STD-749-Non-Standard Parts".

2.1, STANDARDS, MILITARY: After "MIL-STD-810", add "MIL-STD-965-Parts Control Program".

2.2: Delete "SANDERS ASSOCIATES INC. DRAWINGS 1047702 - Notch Filter Assembly, Installation of" and substitute "CINCINNATI ELECTRONICS CORPORATION DRAWING 318900 - Notch Filter".

2.2: Delete "(Application for copies should be addressed to Sandcrs Associates, Incorporated, 95 Canal St., Nashua, N.H. 03060.)" and substitute "(Application for copies should be addressed to Commander, Naval Electronic Systems Command, Attention: PME 107-5, Washington, D.C. 20360.)"

3.1.1, title: Delete "characteristcs" and substitute "characteristics".

PAGE 3

3.2.2, No. of assemblies column: Band 2: Delete "2" and substitute "3"; and Band 3: Delete "3" and substitute "2".

PAGE 4

3.2.3, attenuation chart: Delete and substitute:

"

Band	Bandwidth about notch center frequency for attenuation:			
Band 1	(F_1) 50 dB	(F_2) 15 dB	(F_3) 3.5 dB	(F_4) 1.5 dB
	±5 kHz min.	±100 kHz min.	±350 kHz max.	±500 kHz max.
Band 2	(F_1) 50 dB	(F_2) 15 dB	(F_3) 4.5 dB	(F_4) 2.5 dB
	±5 kHz min.	±100 kHz mins.	±350 kHz max.	±500 kHz max.
Band 3	(F_1) 50 dB	(F_2) 20 dB	(F_3) 3.5 dB	(F_4) 2.5 dB
	±5 kHz min.	±100 kHz min.	±1300 kHz max.	±1600 kHz max.
Band 4	(F_1) 50 dB	(F_2) 20 dB	(F_3) 4.5 dB	(F_4) 3.0 dB
	±5 kHz min.	±100 kHz min.	±1900 kHz max.	±2400 kHz max."

FSC 5915

Source: https://assist.dla.mil -- Downloaded: 202610-20T19:14Z
Check the source to verify that this is the current version before use.

3.2.4, 3.2.5, and FIGURE 2: Delete and substitute:

"3.2.4 Insertion loss. With eight assemblies connected in series and in the bypass mode, the attenuation of a radio frequency (RF) signal shall not be more than 1.0 dB from 0.1 to 10 MHz, 1.2 dB from 10 to 20 MHz, and 1.5 dB from 20 to 32 MHz. No filter in the series shall contribute more than 0.2 dB from 0.1 to 20 MHz and 0.4 dB from 20 to 32 MHz. With eight assemblies connected in series and switched in, the attenuation of an RF signal shall not be more than 5.0 dB from 0.1 to 10 MHz, 7.0 dB from 10 to 24 MHz, and 13.0 dB from 24 to 32 MHz, except within the notch response characteristics of 3.2.3. Each Band 1 or 2 filter shall contribute no more than 0.7 dB from 0.1 to 20 MHz and 1.0 dB from 20 to 32 MHz. Each Band 3 or 4 filter shall contribute no more than 1.0 dB from 0.1 to 10 MHz and 2.5 dB from 10 to 32 MHz.

"3.2.5 Plated surfaces. Gold plating shall be used on electrical contacting surfaces of air variable capacitors and variable inductors.".

PAGE 5

3.2.6, line 3: Delete "2.0" and substitute "4.5".

3.2.6, line 4: Delete "3.0" and substitute "5.5".

3.2.8: Delete and substitute:

"3.2.8 Channel isolation. The isolation between the channels of a unit shall not be less than that indicated in FIGURE 2 with all filters switched in.".

3.2.10, line 5: Delete "five" and substitute "four".

3.2.11 and FIGURE 3: Delete and substitute:

"3.2.11 Channel notch alignment. A momentary switch shall be provided by the notch filter unit that interchanges both the inputs and outputs of Channels A and B."

3.2.12, line 2: Delete "white" and substitute "blue".

PAGE 6

3.2.13 Delete and substitute:

"3.2.13 D.C. electrical power. The notch filter unit shall operate with ±15 volts direct current (VDC) with a maximum current of 2.0 amps."

3.2.14 Delete all but first sentence.

3.3, lines 3 and 4: Delete "Sanders Associates Installation Drawing 1047702" and substitute "Cincinnati Electronics Corporation Drawing 318900."

3.3, line 6: Delete "160" and substitute "190".

3.6, second sentence: Delete.

3.6: Add new sentences "The (F_1) notch attenuation requirements may be degraded up to 10 dB over temperature. The (F_2) and (F_4) notch attenuation may be degraded up to 3 dB over temperature."

PAGE 7

3.7.4, line 2: Delete "the safety standards" and substitute "Requirement 1".

Source: https://assist.dla.mil -- Downloaded: 202610-20T19:14Z
Check the source to verify that this is the current version before use.

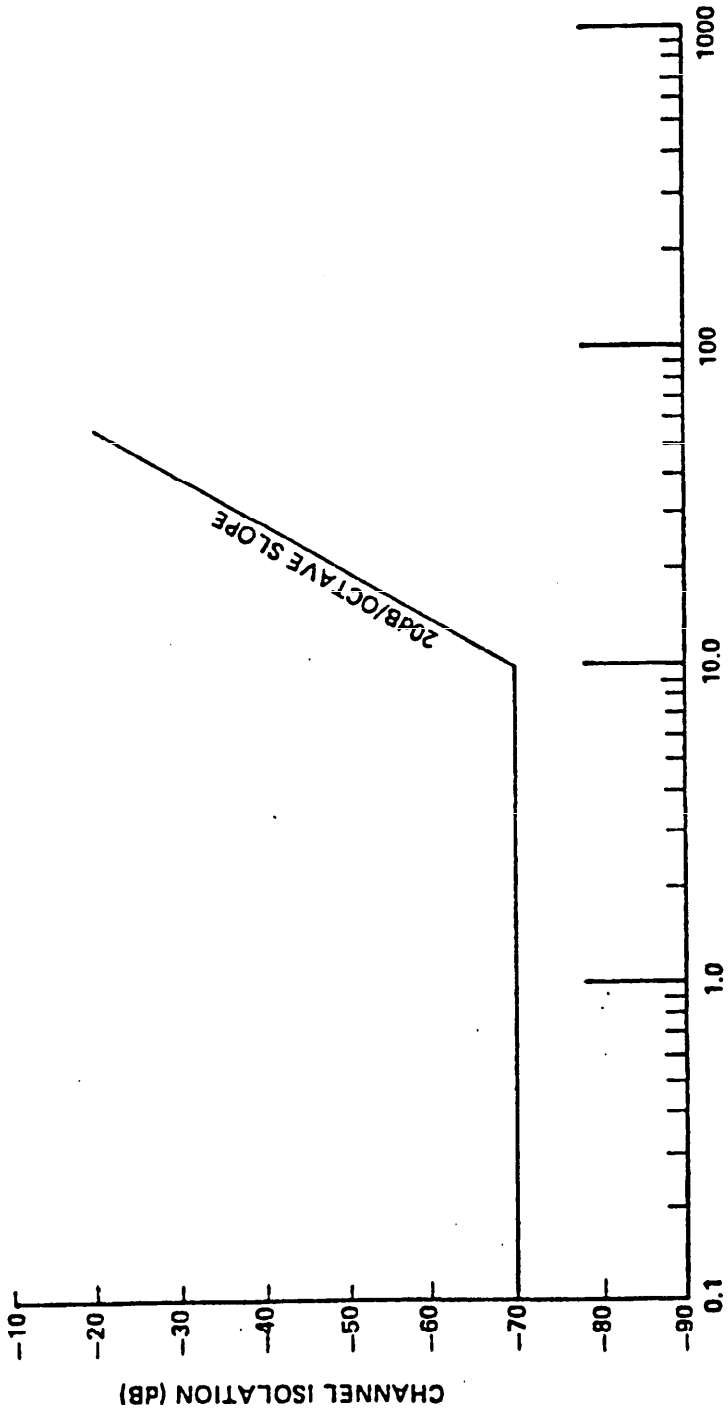


FIGURE 2. Notch filter channel isolation.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T19:14Z
Check the source to verify that this is the current version before use.

PAGE 8

3.7.11.1: Delete and substitute:

"3.7.11.1 Parts control. The parts to be incorporated in the notch filter unit shall be controlled in accordance with MIL-STD-965, Procedure 1."

3.8, first two sentences: Delete and substitute "The equipment shall be capable of withstanding the shock requirements of MIL-STD-810, Method 516.2, Procedure 1, Figure 516.2-2, with a total of nine blows, three in each principle axis."

4.1.1 (a): Delete and substitute "(a) Surveillance of the operations to determine that practices, methods, and procedures are being properly applied."

PAGE 9

4.2 (c): Delete "4.6" and substitute "4.5".

Preparing activity:
NAVY - EC
(Project 5915-N172)

Source: https://assist.dla.mil -- Downloaded: 20261O-20T19:14Z
Check the source to verify that this is the current version before use.