INCH-POUND


MIL-C-83522/14A
25 January 1990
SUPERSEDING
MIL-C-83522/14
21 October 1988

MILITARY SPECIFICATION SHEET

CONNECTOR, FIBER OPTIC, ACTIVE DEVICE RECEPTACLE, 2.5 MM BAYONET PC MOUNT

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (NODISS) specified in the solicitation: MIL-C-83522.

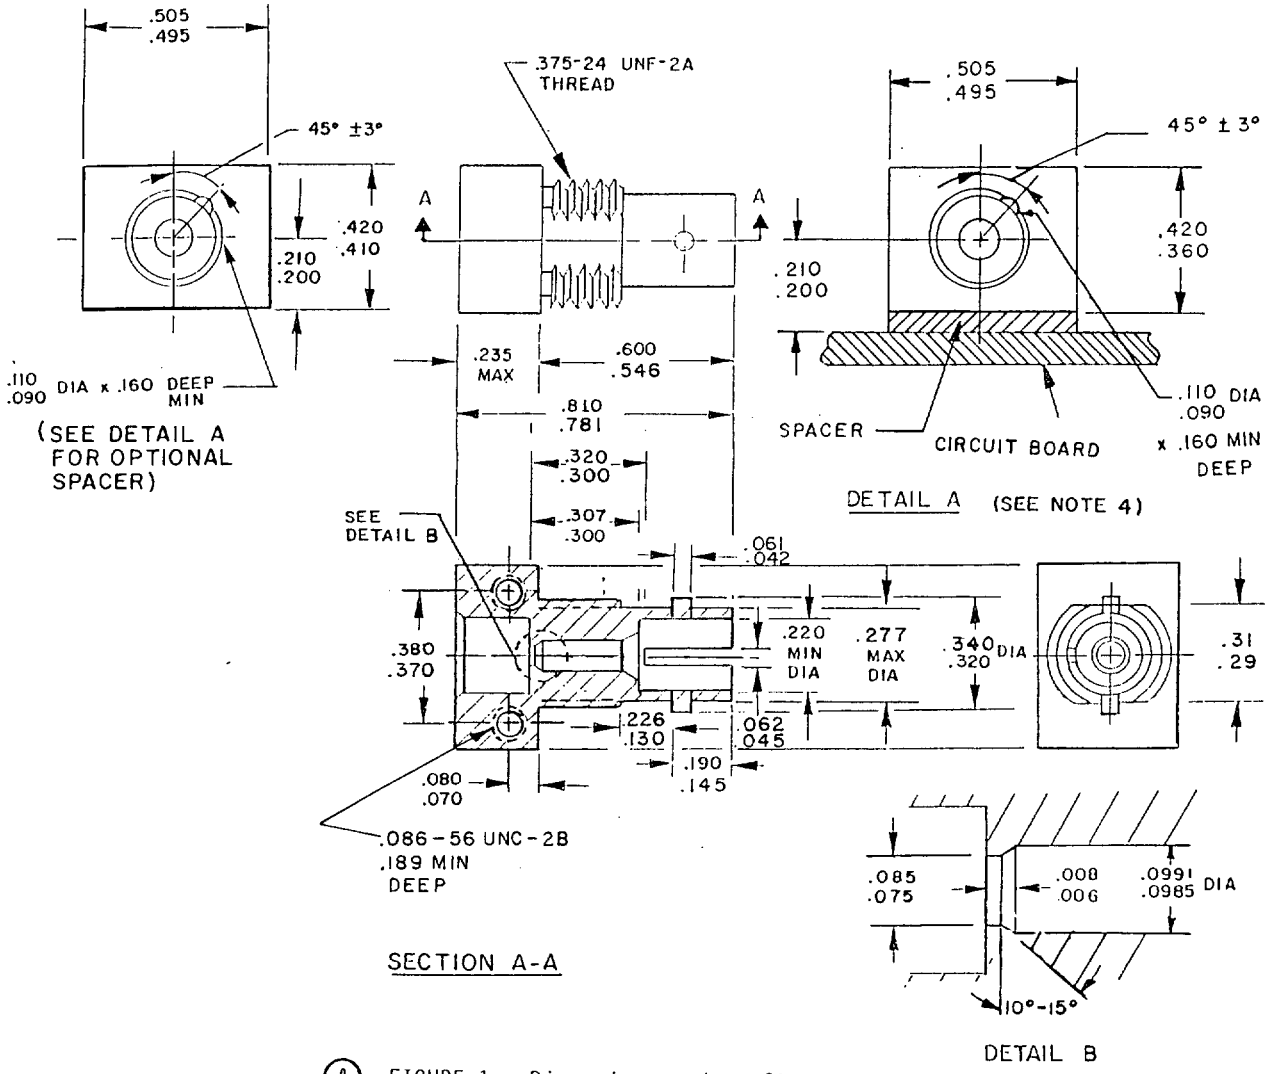


(A) FIGURE 1. Dimensions and configuration.


(A) denotes changes

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:36Z
Check the source to verify that this is the current version before use.

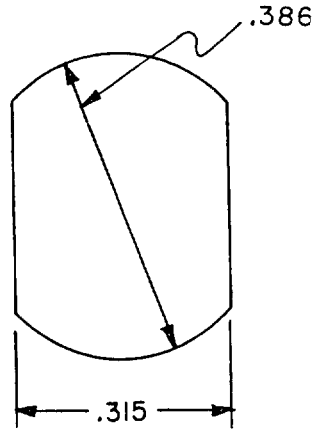


RECOMMENDED PANEL CUTOUT




HEX-NUT
.375 x .065 THICK



INTERNAL TOOTH LOCKWASHER
.410 MAX x .018







ALIGNMENT SLEEVE

Inches	mm
.006	0.15
.008	0.20
.018	0.46
.042	1.07
.045	1.14
.061	1.55
.065	1.65
.070	1.78
.075	1.91
.080	2.03
.085	2.16
.086	2.18
.090	2.29
.0985	2.019
.0991	2.517
.110	2.79
.130	3.30
.145	3.68
.160	4.06
.189	4.80
.190	4.83
.220	5.08
.210	5.33
.220	5.59
.226	5.74
.235	5.97
.277	7.04
.29	7.4
.300	7.62
.305	7.75
.307	7.80
.31	7.9
.315	8.00
.320	8.13
.340	8.64
.360	9.14
.370	9.40
.375	9.53
.380	9.65
.386	9.80
.410	10.41
.420	10.67
.495	12.57
.505	12.83
.546	13.87
.600	15.24
.781	19.84
.810	20.57
.420	10.67
.495	12.57

NOTES:
1. Dimensions are in inches
2. Metric equivalents are given for general information only.
3. Tolerance is ±.005 unless otherwise specified.
4. This dimension may be held by use of a spacer to be supplied with receptacle.

Ⓐ FIGURE 1. Dimensions and configuration - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:36Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Metals: The coupling receptacle housing shall be of corrosion-resistant steel in accordance with QQ-S-763, class 303, /316; nickel-plated brass in accordance with QQ-B-626; nickel-plated zinc die cast alloy; or 6061 nickel-plated aluminum. Other metal components shall be of corrosion-resistant steel in accordance with QQ-S-763, class 303, /316; nickel-plated beryllium copper in accordance with QQ-B-530; nickel-plated brass in accordance with QQ-B-626, or 6061 nickel-plated aluminum.

Dust covers: Dust covers shall be thermoplastic.

Hex nut: Hex nut shall be nickel-plated brass or stainless steel.

Dimensions and configuration: See figure 1.

Optical requirements:

Optical loss (attenuation): Not applicable.

Weight: 4 grams maximum.

Safety wire holes: Not applicable.

Force to engage and disengage:

Longitudinal force: Not applicable.

Torque: Not applicable.

Coupling proof torque: Not applicable.

Coupling mechanism retention force: The force shall be 20 pounds minimum and shall not result in any physical damage.

Mating durability: In accordance with MIL-C-83522, mating durability paragraphs, except 500 cycles instead of 200 cycles.

Ozone exposure: Not applicable.

Fiber optic cable:

Cable diameter: In accordance with DOD-C-85045/2.

Cable configuration: In accordance with DOD-C-85045/2.

Fiber diameter: In accordance with DOD-F-49291/1 through DOD-F-49291/4.

Fiber numerical aperture: Not applicable.

Fiber class: Not applicable.

(A) Military Part or Identifying Number (PIN): M83522/14-01.

(A) Receptacle accessories: Two 2-56, .25 inch long screws, one TO device alignment ring, one lock washer, one dust cover, and one set of instructions.

Note: The receptacle mates with MIL-C-83522/12 bayonet 2.5 mm connector. This receptacle accepts TO can sizes 18, 46, and 52.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:36Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Navy - SH
Air Force - 11, 17, 19, 80, 90, 99
DLA - ES

User activities:
Navy - AS, MC, OS
Air Force - 13, 14

Preparing activity:
Air Force - 85

Agent:
DLA - ES

(Project 6060-0082-3)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:36Z
Check the source to verify that this is the current version before use.