METRIC

MIL-DTL-83538/4C
30 October 2006
SUPERSEDING
MIL-DTL-83538/4B
13 May 2005

DETAIL SPECIFICATION SHEET

CONNECTORS AND ACCESSORIES, ELECTRICAL, CIRCULAR, UMBILICAL, RECEPTACLE, LAUNCHER ASSEMBLY, REMOVABLE CRIMP CONTACTS, SOCKETS FOR MIL-STD-1760 APPLICATIONS (METRIC)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-83538.

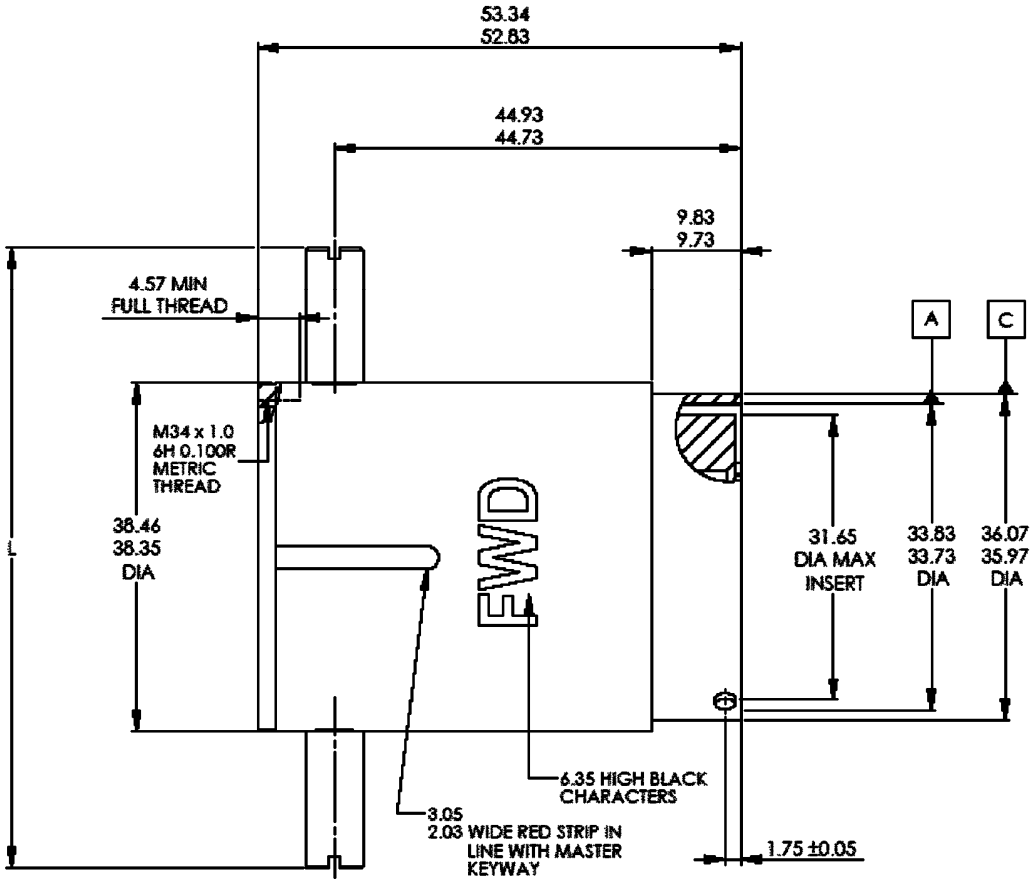


FIGURE 1. Launcher receptacle, style A.

AMSC N/A

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:10Z
Check the source to verify that this is the current version before use.

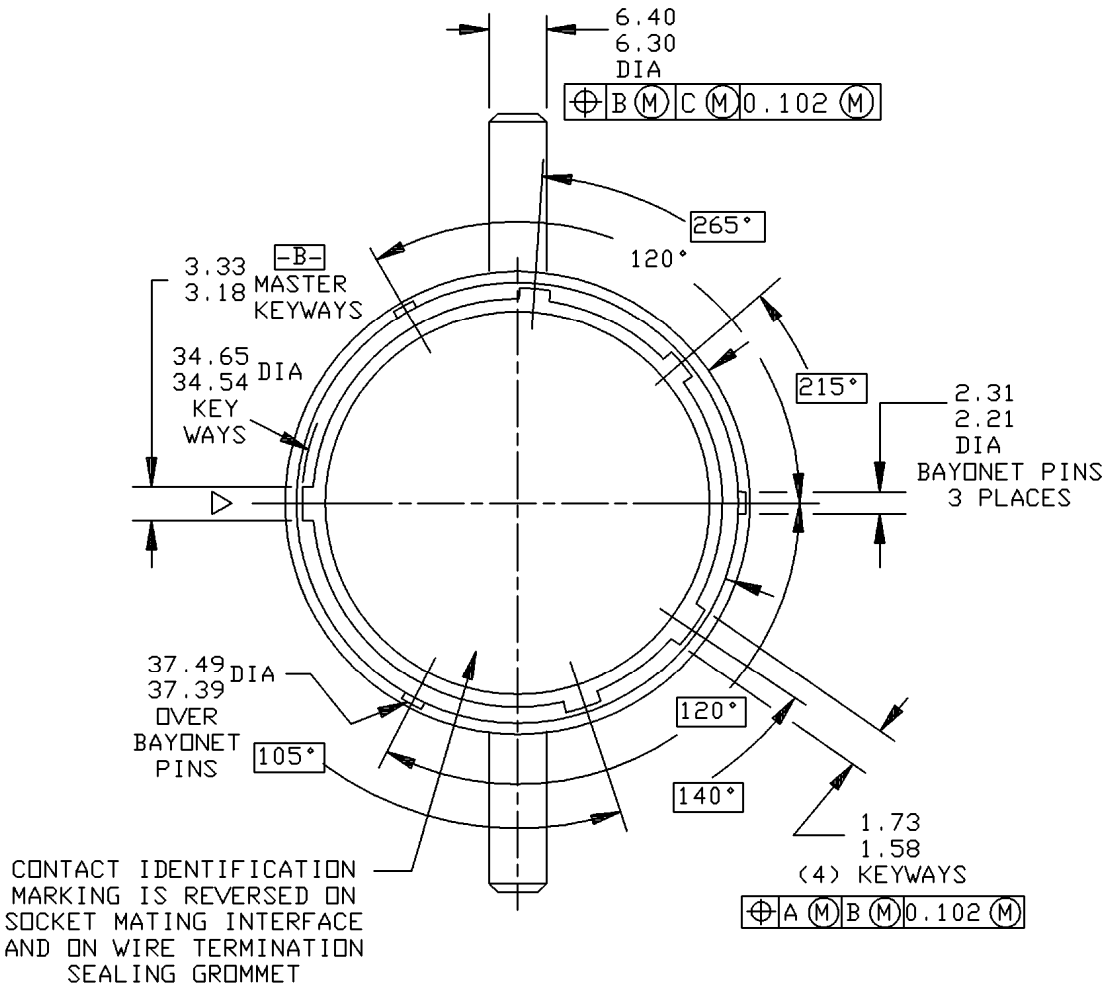


FIGURE 1. Launcher receptacle, style A - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:10Z
Check the source to verify that this is the current version before use.


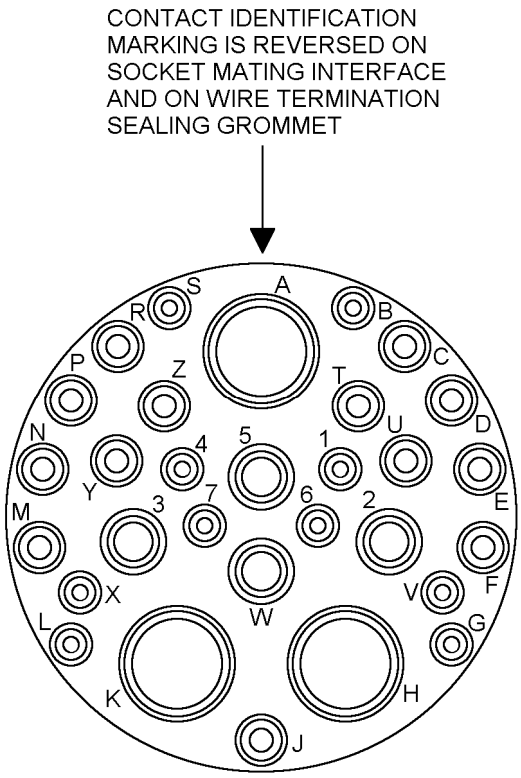


FIGURE 1. Launcher receptacle, style A - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:10Z
Check the source to verify that this is the current version before use.

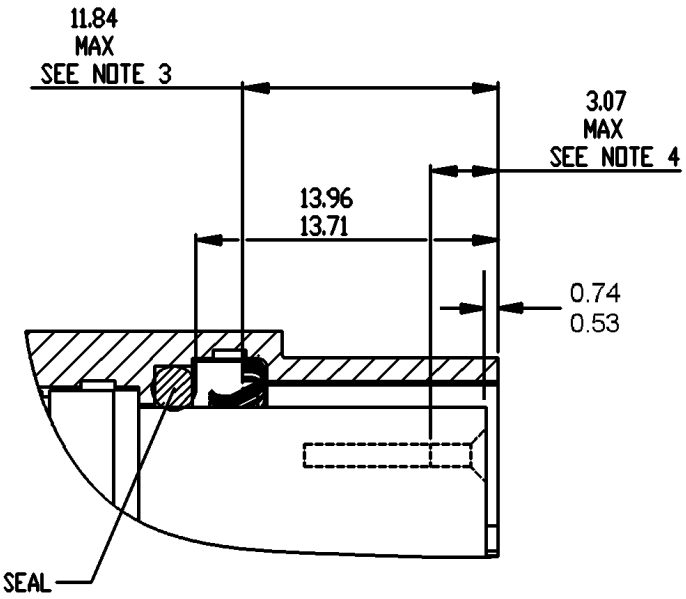


mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches
0.05	0.002	2.03	0.080	6.30	0.248	15.15	0.596	37.49	1.476
0.100	.00394	2.21	0.087	6.35	0.250	31.65	1.246	38.35	1.510
0.102	0.004	2.31	0.090	6.40	0.252	33.73	1.328	38.46	1.514
0.53	0.021	3.05	0.120	9.73	0.383	33.83	1.332	44.73	1.761
0.74	0.029	3.07	0.121	9.83	0.387	34.54	1.360	44.93	1.769
1.58	0.053	3.18	0.125	11.84	0.466	34.65	1.364	52.83	2.080
1.73	0.069	3.33	0.131	13.71	0.539	35.97	1.416	53.34	2.100
1.75	0.069	4.57	0.180	13.96	0.549	36.07	1.420	67.97	2.675
						37.39	1.472	68.68	2.704

NOTES:

1. Dimensions are in millimeters.
2. Inch equivalents are given for information only.
3. A point at which the mating shell first touches the ground spring.
4. A point at which a gauge pin, having the same basic diameter as the mating contact and a square face, touches the socket contact spring.

FIGURE 1. Launcher receptacle, style A - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:10Z
Check the source to verify that this is the current version before use.

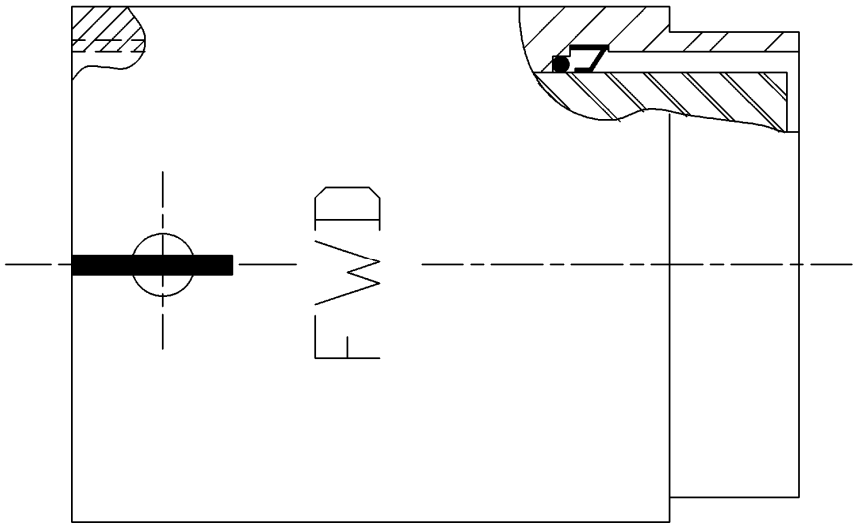

Note: The spigots in styles B and D are rotated 90° from those in styles A and C.

FIGURE 2. Launcher receptacle, style B.

TABLE I. Spigot styles.


Spigot Style	L (mm) Spigot Span	Spigot angle
A	59.05 58.95	Normal
B	59.05 58.95	Rotated 90° To A
C	68.68 67.97	Normal
D	68.68 67.97	Rotated 90° To C

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:10Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configurations: See figures 1 and 2 and table I.
This connector mates with MIL-DTL-83538/3.
Insert arrangement shall be in accordance with MIL-STD-1560 (25-20).
The spigots shall be fitted in such a fashion as to meet the performance requirements in MIL-DTL-83538.

Part or Identifying Number (PIN) example:

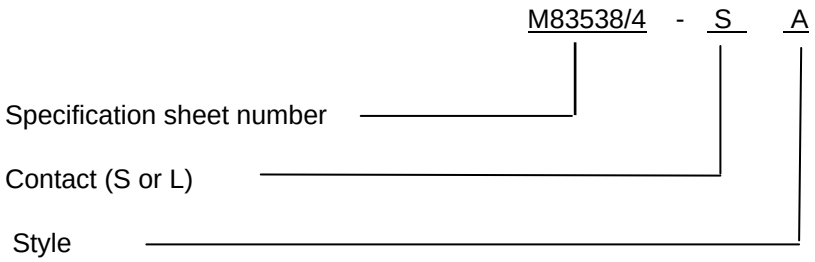

Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Referenced documents. In addition to MIL-DTL-83538, this document references the following:

MIL-DTL-83538/3
MIL-STD-1560
MIL-STD-1760

CONCLUDING MATERIAL

Custodians:
Army – CR
Navy – AS
Air Force – 11
DLA – CC

Preparing activity:
DLA – CC

Review activities:
Army – AR, MI
Navy – EC, MC, OS
Air Force – 19, 99

(Project 5935–2006–055)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change. You should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:10Z
Check the source to verify that this is the current version before use.