MIL-R-83536/26
AMENDMENT 2
18 June 1999
SUPERSEDING
AMENDMENT 1
15 December 1995

MILITARY SPECIFICATION SHEET

RELAYS, ELECTROMAGNETIC, ESTABLISHED RELIABILITY, 6PDT, LOW LEVEL TO 10 AMPERES, PERMANENT MAGNET DRIVE, HERMETICALLY SEALED, ALL WELDED, TRANSIENT SUPPRESSED DC COIL

This amendment forms a part of MIL-R-83536/26, dated 27 March 1992, and is approved for use by all Departments and Agencies of the Department of Defense.

PAGE 1

FIGURE 1, side view: Delete "SERIAL NUMBER SHALL BE MARKED ON TOP OF RELAYS".

PAGE 3

* FIGURE 1, circuit diagram, delete and substitute:

"

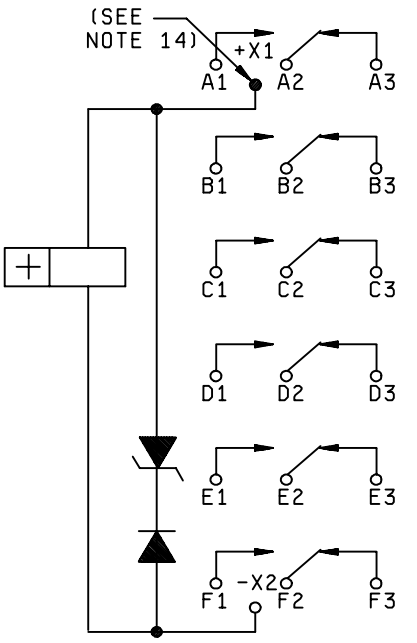

CIRCUIT DIAGRAM

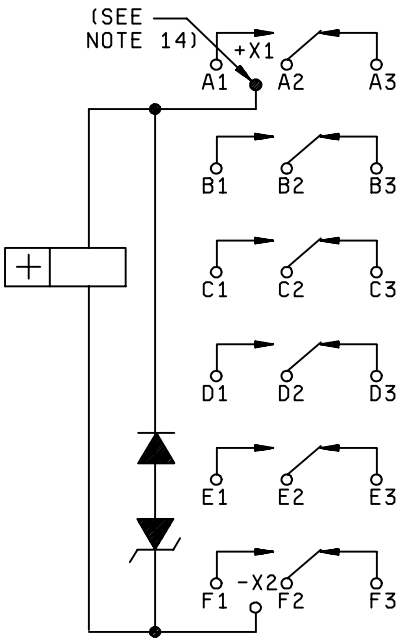

CIRCUIT DIAGRAM
OPTIONAL INTERNAL
DIODE CONFIGURATION

"

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:09Z
Check the source to verify that this is the current version before use.

PAGE 5

Delete "Contact voltage drop or resistance:" and substitute "Contact voltage drop and resistance:"

PAGE 6

Coil transient suppression, after Applicable: Add "(42 V dc maximum)".

PAGE 8

Vibration (random), line 2: Delete "15 minutes each plane".

Weight: Delete "(117.94 g's)" and substitute "(117.94 grams)".

The margins of this amendment are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous amendment were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous amendment.

Custodians:
Army - CR
Navy - EC
Air Force - 11
DLA – CC

Review activities:
Air Force - 99

Preparing activity:
DLA - CC

(Project 5945-1056)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:09Z
Check the source to verify that this is the current version before use.