INCH POUND
MIL-PRF-3098/60F
27 August 1997
SUPERSEDING
MIL-C-3098/60E
28 June 1995

PERFORMANCE SPECIFICATION SHEET

CRYSTAL UNIT, QUARTZ, CR83/U

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification and MIL-PRF-3098.

Pertinent characteristics: 50 MHz to 125 MHz; fifth mechanical overtone; noncontrolled; series.

Inches	mm
.002	.05
.003	.08
.008	.20
.010	.25
.015	.38
.025	.64
.030	.76
.040	1.02
.150	3.81
.175	4.45
.183	4.65
.192	4.88
.238	6.05
.402	10.21
.435	11.05
.530	13.46

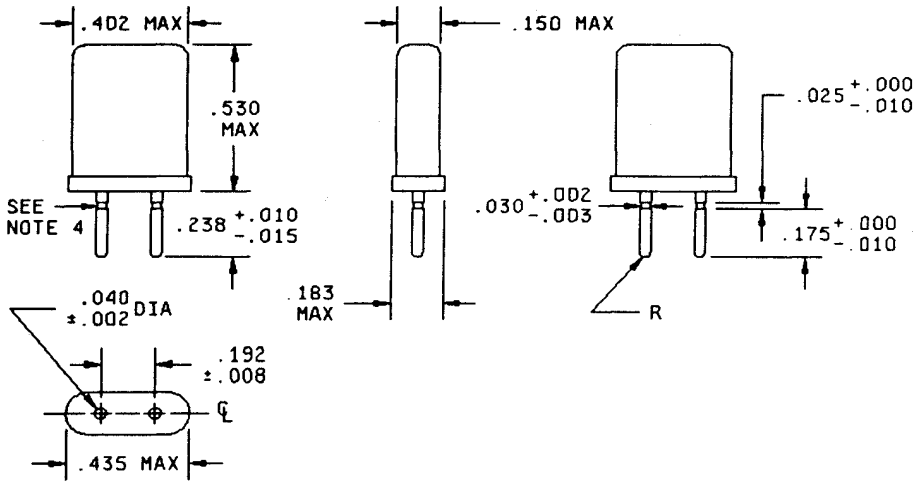

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Marking shall be in accordance with MIL-PRF-3098.
4. The pin undercut may be omitted.

FIGURE 1. Crystal unit - CR83/U.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:36Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions, marking, and configuration: See figure 1.

Frequency range: 50 MHz to 125.0 MHz, inclusive.

Frequency tolerances:

Primary operating temperature range: ±20 parts per million (ppm).

Secondary operating temperature range: ±30 ppm.

Equivalent resistance:

MHz	Ohms, maximum
50 to 90	50
90+ to 125	60

Mode of oscillation: Fifth mechanical overtone.

Operating temperature ranges (noncontrolled):

Primary: -40°C to +90°C, inclusive.

Secondary: -55°C to -40°C, and +90°C to +105°C, inclusive.

Rated drive level: 1.0 mW, maximum.

Resonance: Series.

Capacitance, shunt: 7 pF, maximum.

Shock (specified pulse):

Frequency change permitted: ±5 ppm.

Equivalent resistance change permitted: ±10 percent.

Frequency and equivalent resistance (temperature run):

Frequency change permitted: ±5 ppm.

Equivalent resistance change permitted: ±10 percent.

Vibration: Method 204 of MIL-STD-202, test condition A.

Frequency change permitted: ±5 ppm.

Equivalent resistance change permitted: ±10 percent.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:36Z
Check the source to verify that this is the current version before use.

Aging:

Frequency change permitted: ±5 ppm.

Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Army - CR
Navy - EC
Air force - 85

Review activities:
Army - AR, MI
Navy - AS, MC, SH
Air Force - 17, 19

Preparing activity:
Army - CR

Agent:
DLA - CC

(Project 5955-0697-36)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:36Z
Check the source to verify that this is the current version before use.