INCH-POUND

MIL-C-3098/62D
28 June 1995
SUPERSEDING
MIL-C-3098/62C
23 June 1975

MILITARY SPECIFICATION SHEET


CRYSTAL UNIT, QUARTZ, CR78/U

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirement for the acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-3098.

Pertinent characteristics: 2.2 to 20 MHz; fundamental; noncontrolled; antiresonance.

Inches	mm
.002	.05
.003	.08
.008	.20
.010	.25
.015	.38
.025	.64
.030	.76
.040	1.02
.150	3.81
.175	4.45
.183	4.65
.192	4.88
.238	6.05
.402	10.21
.435	11.05
.530	13.46

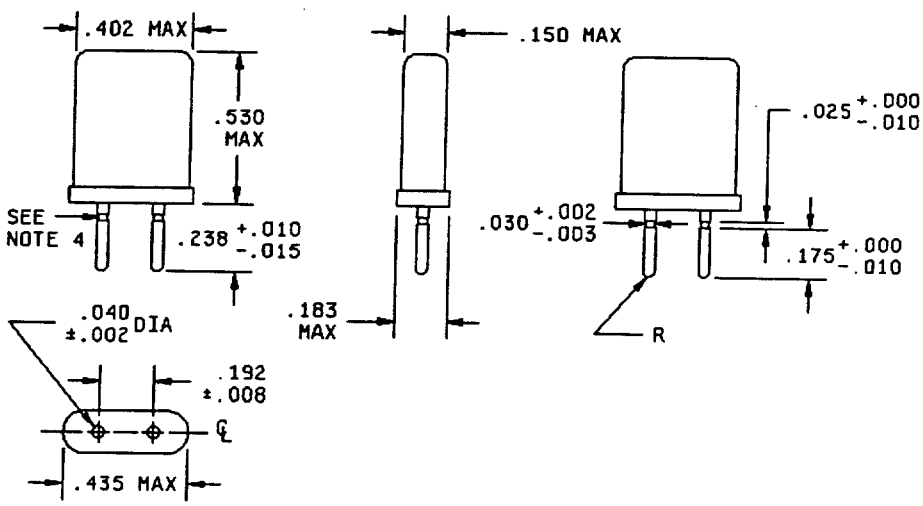

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Marking to be in accordance with MIL-C-3098.
4. Pin undercut may be omitted.

FIGURE 1. Crystal unit - CR78/U.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202610-16T16:37Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Holder: HC-25/U (MIL-H-10056/11).

Dimensions, marking, and configuration: See figure 1.

Frequency range: 2.2 to 20 MHz, inclusive.

Capacitance, shunt: 7 pF, maximum.

Frequency tolerances (operating temperature range): ±50 ppm.

Equivalent resistance: See table I.

TABLE I. Equivalent resistance.

Frequency range MHz	Maximum resistance Ohms
2.2 to 3.00	360
3.0+ to 3.75	180
3.75+ to 4.75	120
4.75+ to 6.0	75
6.0+ to 7.0	50
7.0+ to 10.0	30
10.0+ to 20.0	25

Mode of oscillation: Fundamental.

Antiresonance, load capacitance: 30.0 ±0.5 pF.

Operating temperature ranges: -55°C to +105°C, inclusive.

Drive level, rated: 5.0 ± 1.0 mW

Shock (specified pulse):

Frequency change permitted: ±5 ppm.

Equivalent resistance change permitted: ±10 percent.

Vibration: Method 204 of MIL-STD-202, test condition A.

Frequency change permitted: ±5 ppm.

Equivalent resistance change permitted: ±10 percent.

Thermal shock:

Frequency change permitted: ±5 ppm.

Equivalent resistance change permitted: ±10 percent.

Aging:

Frequency change permitted: ±5 ppm.

Revision letters are not used to denote changes due to the extensiveness of the changes.

Source: https://assist.dla.mil -- Downloaded: 202610-16T16:37Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - AR, MI
Navy - AS, MC, SH
Air Force - 17,19

Preparing activity:
Army - ER

Agent:
DLA - ES

(Project 5955-0680-12)

Source: https://assist.dla.mil -- Downloaded: 202610-16T16:37Z
Check the source to verify that this is the current version before use.