INCH-POUND
MIL-PRF-3098/62F
12 January 2005
SUPERSEDING
MIL-PRF-3098/62E
27 August 1997

PERFORMANCE SPECIFICATION SHEET


CRYSTAL UNIT, QUARTZ, CR78/U

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification and MIL-PRF-3098.

Pertinent characteristics: 2.2 MHz to 20 MHz; fundamental; noncontrolled; antiresonance.

Inches	mm
.000	0.00
.002	0.05
.003	0.08
.008	0.20
.010	0.25
.015	0.38
.025	0.64
.030	0.76
.040	1.02
.150	3.81
.175	4.45
.183	4.65
.192	4.88
.238	6.05
.402	10.21
.435	11.05
.530	13.46

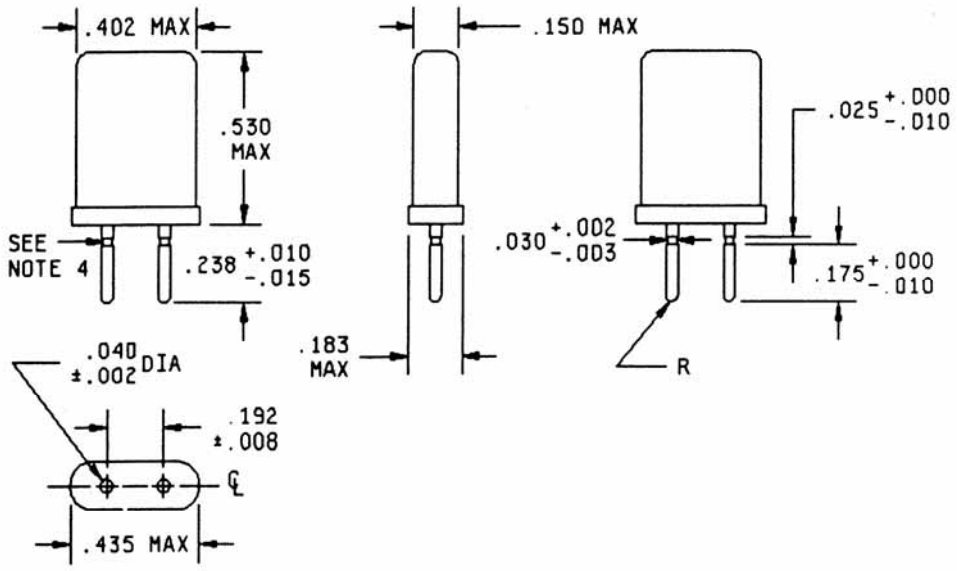

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Marking shall be in accordance with MIL-PRF-3098.
4. The pin undercut may be omitted.

FIGURE 1. Crystal unit - CR78/U.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:37Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions, marking, and configuration: See figure 1.

Frequency range: 2.2 MHz to 20 MHz, inclusive.

Capacitance, shunt: 7 pF, maximum.

Frequency tolerances (operating temperature range): ±50 ppm.

Equivalent resistance: See table I.

TABLE I. Equivalent resistance.

Frequency range MHz	Maximum resistance Ohms
2.20 to 3.00	360
3.00+ to 3.75	180
3.75+ to 4.75	120
4.75+ to 6.00	75
6.00+ to 7.00	50
7.00+ to 10.00	30
10.00+ to 20.00	25

Mode of oscillation: Fundamental.

Antiresonance, load capacitance: 30.0 pF ±0.5 pF.

Operating temperature ranges (noncontrolled): -55°C to +105°C, inclusive.

Rated drive level: 1.0 mW maximum.

Shock (specified pulse):

Frequency change permitted: ±5 ppm.

Equivalent resistance change permitted: ±10 percent.

Vibration: Method 204 of MIL-STD-202, test condition A.

Frequency change permitted: ±5 ppm.

Equivalent resistance change permitted: ±10 percent.

Thermal shock:

Frequency change permitted: ±5 ppm.

Equivalent resistance change permitted: ±10 percent.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:37Z
Check the source to verify that this is the current version before use.

Aging:

Frequency change permitted: ±5 ppm.

* Reference documents. In addition to MIL-PRF-3098, this document references the following:

MIL-STD-202

* The margins of this specification sheet are marked with asterisks to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:
Army - CR
Navy - EC
Air Force - 11
DLA - CC

Review activities:
Army - AR, MI
Navy - AS, MC, SH
Air Force - 19

Preparing activity:
Army - CR

Agent:
DLA - CC

(Project 5955-0791)

* NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:37Z
Check the source to verify that this is the current version before use.