INCH-POUND

MIL-C-3098/67C
28 June 1995
SUPERSEDING
MIL-C-3098/67B(ER)
23 June 1975

MILITARY SPECIFICATION SHEET


CRYSTAL UNIT, QUARTZ, CR89/U

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirement for the acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-3098.

Pertinent characteristics: 2.12 to 6.2 MHz; fundamental; noncontrolled; antiresonance.

Inches	mm
.002	0.05
.005	0.13
.008	0.20
.010	0.25
.025	0.64
.035	0.89
.040	1.02
.207	5.26
.237	6.02
.238	6.05
.275	6.99
.535	13.59
.567	14.40
.640	16.26

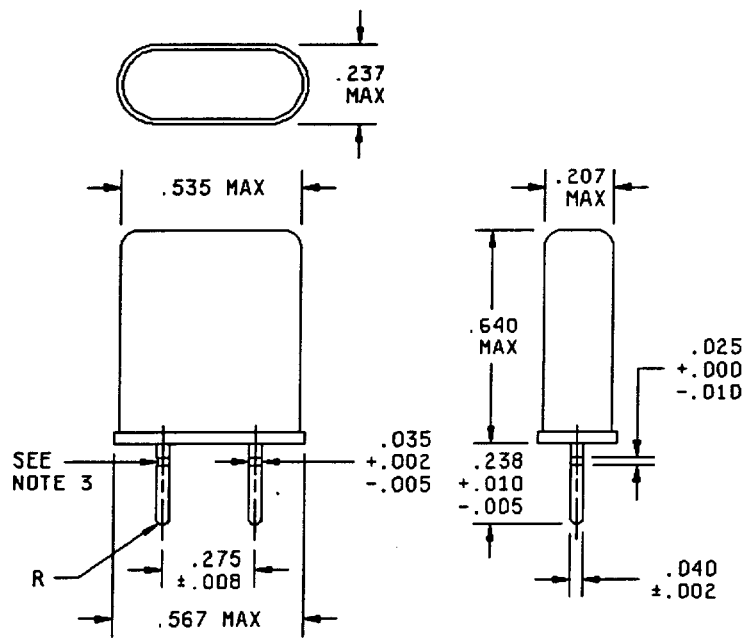

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Pin undercut may be omitted
3. Marking to be in accordance with MIL-C-3098.

FIGURE 1. Crystal unit - CR89/U.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:38Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Holder: HC-32/U (MIL-H-10056/18).

Dimensions, marking, and configuration: See figure 1.

Frequency range: 2.12 to 6.2 MHz, inclusive.

Mode of oscillation: Fundamental.

Rated drive level: 10.0 ±2.0 mW.

Operating temperature range: -55°C to +90°C, inclusive.

Frequency tolerance: ±50 ppm.

Equivalent resistance: See table I.

Antiresonance, load capacitance: 30.0 ±0.5 pF.

Capacitance, shunt: 7.0 pF, maximum.

Shock (specified pulse):

Frequency change permitted: ±5 ppm.

Equivalent resistance change: ±15 percent.

Vibration: Method 201 of MIL-STD-202.

Frequency change permitted: ±5 ppm.

Equivalent resistance change permitted: ±15 percent.

Frequency and equivalent resistance:

Frequency change permitted: ±5 ppm.

Equivalent resistance change permitted: ±15 percent.

TABLE I. Equivalent resistance.

Frequency range, inclusive	Maximum resistance
MHz	Ohms
2.12 to 2.25	500
2.25+ to 2.80	320
2.80+ to 3.41	250
3.41+ to 4.10	180
4.10+ to 5.10	120
5.10+ to 6.2	75

Revision letters are not used to denote changes due to the extensiveness of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:38Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army - ER
Navy - EC

Review activity:
Army - MI

Preparing activity:
Army - ER

Agent:
DLA - ES

(Project 5955-0680-21)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:38Z
Check the source to verify that this is the current version before use.