INCH-POUND
MIL-PRF-3098/68G
w/AMENDMENT 1
7 October 2016
SUPERSEDING
MIL-PRF-3098/68G
7 January 2010

PERFORMANCE SPECIFICATION SHEET

CRYSTAL UNIT, QUARTZ, CR91/U

INACTIVE FOR NEW DESIGN
AFTER 22 JUNE 2016

This specification is approved for use by all Departments
and Agencies of the Department of Defense.

The requirements for acquiring the product described herein
shall consist of this specification sheet and MIL-PRF-3098.

Pertinent characteristics: 9.5 MHz to 12.5 MHz; fundamental; noncontrolled; antiresonance.

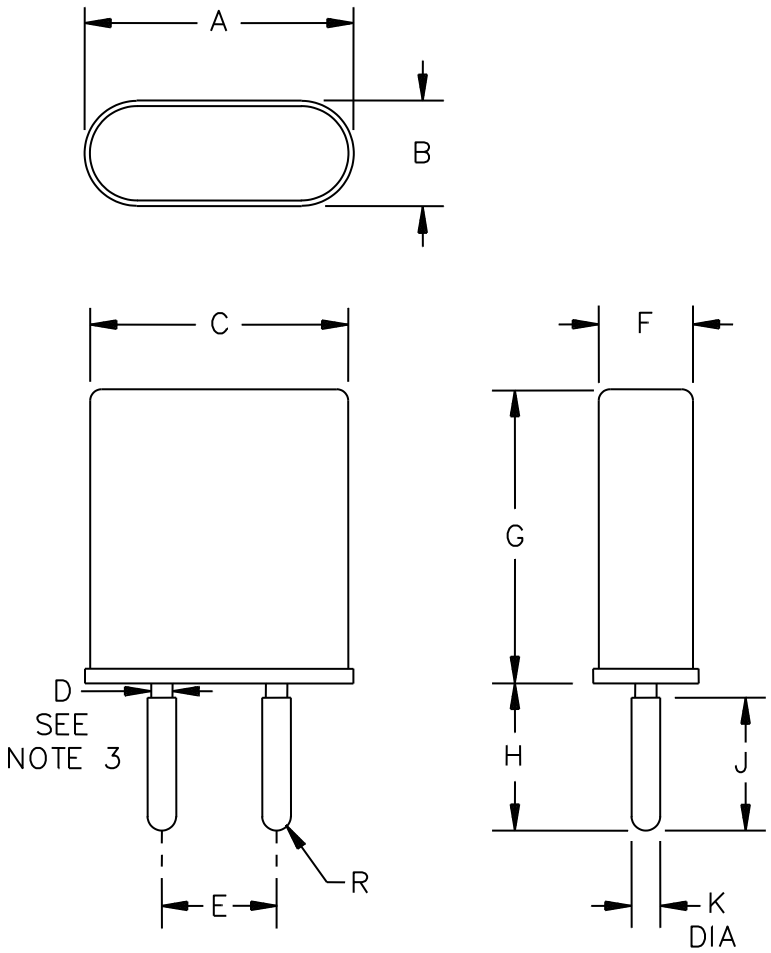


FIGURE 1. Crystal unit - CR91/U.

AMSC N/A

FSC 5955

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:39Z
Check the source to verify that this is the current version before use.

Ltr	Inches		mm	
	Min	Max	Min	Max
A	---	1.170	---	29.72
B	---	.460		11.68
C	---	1.125	---	28.58
D	.091	.095	2.31	2.41
E	.490	.510	12.45	12.95
F	---	.411	---	10.44
G	---	1.282	---	32.56
H	.625	.655	15.87	16.64
J	.568	.588	14.43	14.93
K	.123	.127	3.12	3.22

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. The pin undercut may be omitted.
4. Marking to be in accordance with MIL-PRF-3098.

FIGURE 1. Crystal unit - CR91/U - Continued.

REQUIREMENTS:

Dimensions, marking, and configuration: See figure 1.

Frequency range: 9.5 MHz to 12.5 MHz, inclusive. 1/

Mode of oscillation: Fundamental.

Rated drive level: 1.0 mW maximum.

Frequency tolerance (operating temperature range): ±50 parts per million (ppm).

Equivalent resistance: 25 ohms, maximum.

Qualification: Not required. First article testing shall be performed according to the qualification table of MIL-PRF-3098.

Antiresonance, load capacitance: 55.0 pF ±0.5 pF.

Shock (specified pulse):

Frequency change permitted: ±5 ppm.

Equivalent resistance change permitted: ±10 percent.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:39Z
Check the source to verify that this is the current version before use.

1/ In using equipment, these frequencies are multiplied to the 12th harmonic, which is also known as aircraft frequency.

Vibration: MIL-STD-202-201.

Frequency change permitted: ±5 ppm.

Equivalent resistance change permitted: ±10 percent.

Frequency and equivalent resistance:

Frequency change permitted: ±5 ppm.

Equivalent resistance change permitted: ±10 percent.

Aging:

Frequency change permitted: ±5 ppm.

Part or Identifying Number (PIN): CR91/U (followed by specified frequency), see 1.2 of MIL-PRF-3098.

Reference documents. In addition to MIL-PRF-3098, this document references the following:

MIL-STD-202-201

The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:
Army - CR
Navy - EC
DLA - CC

Preparing activity:
Army - CR

Agent:
DLA - CC

(Project 5955-2016-038)

Review activities:
Army - AR, MI
Navy - AS, MC, SH

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:39Z
Check the source to verify that this is the current version before use.