MILITARY SPECIFICATION

MICROCIRCUITS, DIGITAL, SCHOTTKY TTL, LOW-POWER, BUFFERS, MONOLITHIC SILICON

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the detail requirements for monolithic silicon, low-power Schottky TTL, positive buffer microcircuits. Two product assurance classes and a choice of case outlines and lead finishes are provided for each type and are reflected in the complete part number.

1.2 Part number. The part number shall be in accordance with MIL-M-38510.

1.2.1 Device type. The device type shall be as follows:

Device type	Circuit
01	Dual, 4-input, positive NAND buffer
02	Quadruple, 2-input positive NAND buffer
03	Quadruple, 2-input positive NAND buffer (open collector output)
04	Quadruple, 2-input positive NOR buffer

1.2.2 Device class. The device class shall be the product assurance level as defined in MIL-M-38510.

1.2.3 Case outline. The case outline shall be designated as follows:

Outline letter	Case outline (see MIL-M-38510, appendix C)
A	F-1 (14-lead, 1/4" x 1/4"), flat package
B	F-3 (14-lead, 3/16" x 1/4"), flat package
C	D-1 (14-lead, 1/4" x 3/4"), dual-in-line package
D	F-2 (14-lead, 1/4" x 3/8"), flat package
X	C-2 (20-terminal, .350" x .350"), square chip carrier package

1.3 Absolute maximum ratings.

Supply voltage range	-0.5 V dc to +7.0 V dc.
Input voltage range	-1.5 V dc at -18 mA to +5.5 V dc
Storage temperature range	-65°C to +150°C
Maximum power dissipation (P_D) 1/	17 mW dc per buffer
Lead temperature (soldering, 10 seconds)	+300°C
Thermal resistance, junction-to-case (θ_{JC}):	
Cases A, B, and D	70°C/W
Case X	60°C/W
Case C	50°C/W
Junction temperature (T_J)	+175°C

1/ Must withstand the added P_D due to short circuit test (e.g., I_{OS}).

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Rome Air Development Center, (RBE-2), Griffiss AFB, NY 13441, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:02Z
Check the source to verify that this is the current version before use.

1.4 Recommended operating conditions.

Supply voltage (V_{CC})	+4.5 V dc minimum to 5.5 V dc maximum
Minimum high level input voltage (V_{IH})	+2.0 V dc
Maximum low level input voltage (V_{LH})	+0.7 V dc
Normalized fanout (each output) 2/	30 maximum
Case operating temperature range (T_C)	-55°C to +125°C

2. APPLICABLE DOCUMENTS

2.1 Government specifications and standards. Unless otherwise specified, the following specifications and standards, of the issue listed in that issue of the Department of Defense Index of Specifications and Standards specified in the solicitation, form a part of this specification to the extent specified herein.

SPECIFICATION

MILITARY

MIL-M-38510 - Microcircuits, General Specification for.

STANDARD

MILITARY

MIL-STD-883 - Test Methods and Procedures for Microelectronics.

(Copies of specifications, standards, handbooks, drawings, and publications required by manufacturers in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

2.2 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence.

3. REQUIREMENTS

3.1 Detail specification. The individual item requirements shall be in accordance with MIL-M-38510, and as specified herein.

3.2 Design, construction, and physical dimensions. The design, construction, and physical dimensions shall be as specified in MIL-M-38510, and herein.

3.2.1 Logic diagrams and terminal connections. The logic diagrams and terminal connections shall be as specified on figure 1.

3.2.2 Truth tables. The truth tables shall be as specified on figure 2.

3.2.3 Schematic circuits. The schematic circuits shall be submitted to the preparing activity prior to inclusion of a manufacturer's device in this specification and shall be submitted to the qualifying activity as a prerequisite for qualification. All manufacturers' schematics shall be maintained and available upon request.

3.2.4 Case outlines. The case outlines shall be as specified in 1.2.3.

3.3 Lead material and finish. The lead material and finish shall be in accordance with MIL-M-38510 (see 6.5).

3.4 Electrical performance characteristics. The electrical performance characteristics are specified in table I, and apply over the full recommended case operating temperature range, unless otherwise specified.

3.5 Electrical test requirements. The electrical test requirements for each device class shall be the subgroups specified in table II. The electrical tests for each subgroup are described in table III.

2/ The device shall fanout in both high and low levels to the specified number of inputs for the same device type as that being tested.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:02Z
Check the source to verify that this is the current version before use.

otherwise specified, the issues are those cited in the solicitation.

TABLE I. Electrical performance characteristics.

Test	Symbol	Conditions $-55°C \leq T_C \leq +125°C$	Device type	Limits		Units
				Min	Max	
High-level output voltage	V_{OH}	V_{CC} = +4.5 V V_{IL} = +0.7 V I_{OH} = -1.2 mA	01, 02 04	2.5	---	Volts
Low-level output voltage	V_{OL}	V_{CC} = +4.5 V I_{OL} = +12 mA V_{IH} = +2.0 V	All	---	0.4	Volts
Input clamp voltage	V_{IC}	V_{CC} = +4.5 V T_C = +25°C I_{IN} = -18 mA	All	---	-1.5	Volts
High-level input current	I_{IH1}	V_{CC} = +5.5 V V_{IN} = +2.7 V	All	---	20	µA
High-level input current	I_{IH2}	V_{CC} = +5.5 V V_{IN} = +5.5 V	All	---	100	µA
Low-level input current	I_{IL}	V_{CC} = +5.5 V V_{IN} = +0.4 V	All	-5	-400	µA
Short-circuit output current	I_{OS}	V_{CC} = +5.5 V 2/	01, 02 04	-15	-130	mA
Maximum collector cut-off current	I_{CEX}	V_{OH} = +5.5 V V_{CC} = +4.5 V V_{IN} = +0.7 V	03	---	250	µA
High-level supply	I_{CCH}	V_{CC} = +5.5 V V_{IN} = +0 V	01 02, 03 04	--- --- ---	1 2 3.6	mA
Low-level supply	I_{CCL}	V_{CC} = +5.5 V V_{IN} = +5.5 V	01 02, 03 04	--- --- ---	6 12 13.8	mA
Propagation delay time, high to low level	t_{PHL}	C_L = 125 pF ±10% R_L = 667Ω ±5%	01, 02 03 04	2 3 2	30 51 30	ns
Propagation delay time, low to high level	t_{PLH}	C_L = 125 pF ±10% R_L = 667Ω ±5%	01, 02 03 04	2 3 2	30 56 30	ns

1/ Complete terminal conditions shall be as specified in table III.
2/ Not more than one output should be shorted at a time.

Source: https://assist.dla.mil -- Downloaded: 202610-21T14:02Z
Check the source to verify that this is the current version before use.

TABLE II. Electrical test requirements.

MIL-STD-883 test requirements	Subgroups (see table III)	
	Class S devices	Class B devices
Interim electrical parameters (pre burn-in) (method 5004)	1	1
Final electrical test parameters (method 5004)	1*, 2, 3, 9, 10, 11	1*, 2, 3, 9
Group A test requirements (method 5005)	1, 2, 3, 9, 10, 11	1, 2, 3, 9
Group B test requirements (method 5005) subgroup 5	1, 2, 3, 9, 10, 11	N/A
Group C end-point electrical parameters (method 5005)	N/A	1, 2, 3
Additional electrical subgroups for group C periodic inspections	N/A	10, 11
Group D end-point electrical parameters (method 5005)	1, 2, 3	1, 2, 3

*PDA applies to subgroup 1 (see 4.2 c.).

3.6 Marking. Marking shall be in accordance with MIL-M-38510. At the option of the manufacturer, marking of the country of origin may be omitted from the body of the microcircuit, but shall be retained on the initial container.

3.7 Microcircuit group assignment. The devices covered by this specification shall be in microcircuit group number 9 (see MIL-M-38510 appendix E).

4. QUALITY ASSURANCE PROVISIONS

4.1 Sampling and inspection. Sampling and inspection procedures shall be in accordance with MIL-M-38510 and methods 5005 and 5007, as applicable, of MIL-STD-883, except as modified herein.

4.2 Screening. Screening shall be in accordance with method 5004 of MIL-STD-883, and shall be conducted on all devices prior to qualification and quality conformance inspection. The following additional criteria shall apply:

a. Burn-in test (method 1015 of MIL-STD-883).
   (1) Test condition D or E, using the circuit shown on figure 3, or equivalent.
   (2) T_A = +125°C minimum.
b. Interim and final electrical test parameters shall be as specified in table II, except interim electrical parameters test prior to burn-in is optional at the discretion of the manufacturer.
c. The percent defective allowable (PDA) for class S devices shall be as specified in MIL-M-38510. The PDA for class B devices shall be 10 percent based on failures from group A, subgroup 1 test after cooldown as final electrical test in accordance with method 5004 of MIL-STD-883, and with no intervening electrical measurements. If interim electrical

Source: https://assist.dla.mil -- Downloaded: 202640-21T14:02Z
Check the source to verify that this is the current version before use.

parameter tests are performed prior to burn-in, failures resulting from pre burn-in screening may be excluded from the PDA. If interim electrical parameter tests prior to burn-in are omitted, then all screening failures shall be included in the PDA. The verified failures of Group A, subgroup 1, after burn-in divided by the total number of devices submitted for burn-in in that lot shall be used to determine the percent defective for that lot, and the lot shall be accepted or rejected based on the PDA for the applicable device class.

4.3 Qualification inspection. Qualification inspection shall be in accordance with MIL-M-38510. Inspections to be performed shall be those specified in method 5005 of MIL-STD-883 and herein for groups A, B, C, and D inspections (see 4.4.1 through 4.4.4).

4.4 Quality conformance inspection. Quality conformance inspection shall be in accordance with MIL-M-38510. Inspections to be performed shall be those specified in method 5005 of MIL-STD-883 and herein for groups A, B, C, and D inspections (see 4.4.1 through 4.4.4).

4.4.1 Group A inspection. Group A inspection shall be in accordance with table I of method 5005 of MIL-STD-883 and as follows:

a. Tests shall be as specified in table II.

b. Subgroups 4, 5, 6, 7, and 8 shall be omitted.

4.4.2 Group B inspection. Group B inspection shall be in accordance with table II of method 5005 of MIL-STD-883. Electrical parameters shall be as specified in table II herein.

4.4.3 Group C inspection. Group C inspection shall be in accordance with table III of method 5005 of MIL-STD-883 and as follows:

a. End-point electrical parameters shall be as specified in table II herein.

b. Subgroups 3 and 4 shall be added to the group C inspection requirements for class B devices and shall consist of the tests, conditions and limits specified for subgroups 10 and 11 of group A.

c. Steady-state life test (method 1005 of MIL-STD-883) conditions:

(1) Test condition D or E, using the circuit shown on figure 3, or equivalent.

(2) T_A = +125°C, minimum.

(3) Test duration: 1,000 hours, except as permitted by appendix B of MIL-M-35810, and method 1005 of MIL-STD-883.

4.4.4 Group D inspection. Group D inspection shall be in accordance with table IV of method 5005 of MIL-STD-883. End-point electrical parameters shall be as specified in table II herein.

4.5 Methods of inspection. Methods of inspection shall be as follows.

4.5.1 Voltage and current. All voltages given are referenced to the microcircuit ground terminal. Currents given are conventional and positive when flowing into the referenced terminal.

5. PACKAGING

5.1 Packaging requirements. The requirements for packaging shall be in accordance with MIL-M-38510.


6. NOTES

6.1 Notes. The notes specified in MIL-M-38510 are applicable to this specification.

Source: https://assist.dla.mil -- Downloaded: 202610-21T14:02Z
Check the source to verify that this is the current version before use.


Device type 01

Cases A, B, C, and D

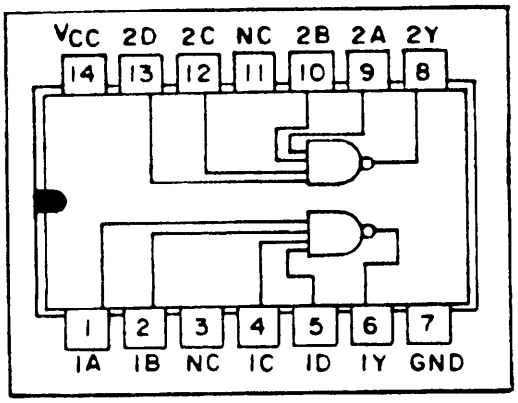

Device type 01

Case X

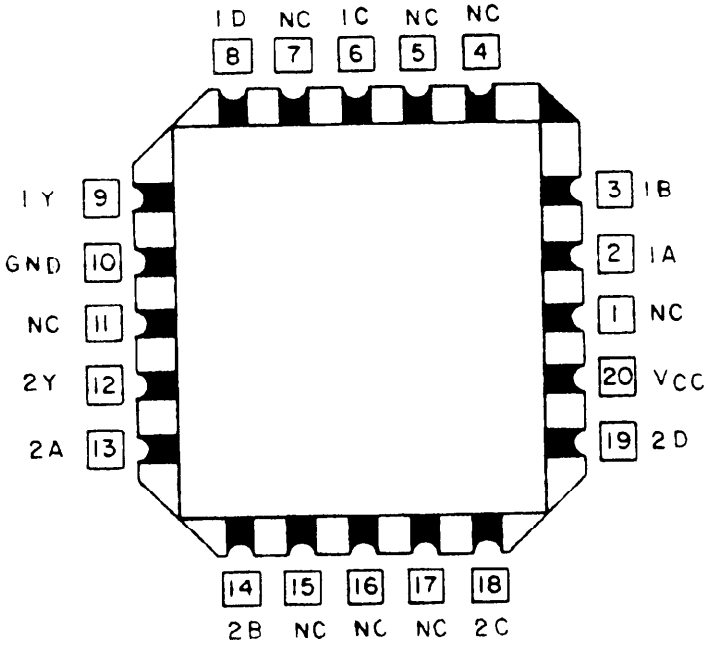


(TOP VIEW)

FIGURE 1. Logic diagram and terminal connections (top views).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:02Z
Check the source to verify that this is the current version before use.


Device types 02 and 03

Cases A, B, C, and D

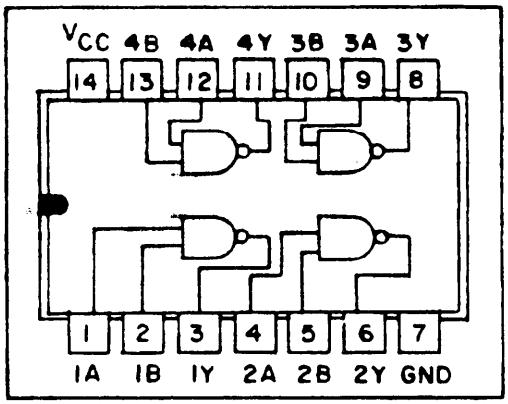

Device types 02 and 03

Case X

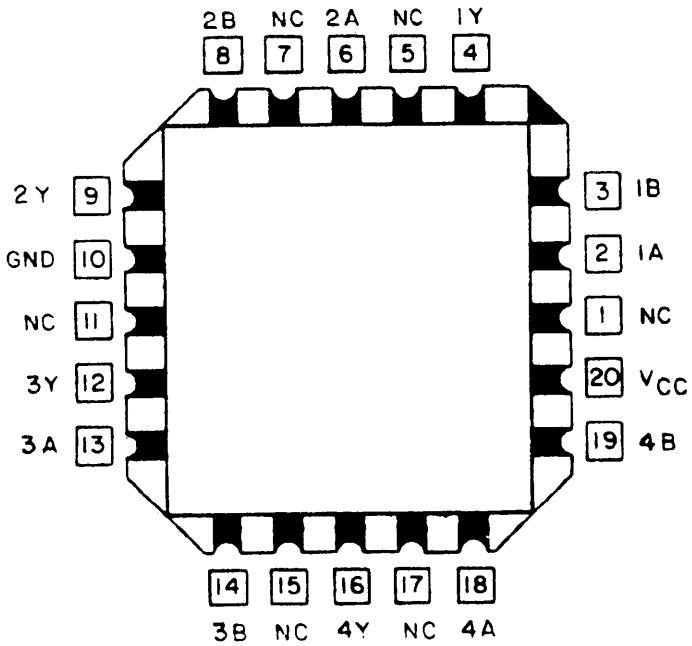


(TOP VIEW)

FIGURE 1. Logic diagram and terminal connections (top view) - Continued.

Source: https://assist.dla.mil -- Downloaded: 202610-21T14:02Z
Check the source to verify that this is the current version before use.


Device type 04

Cases A, B, C, and D

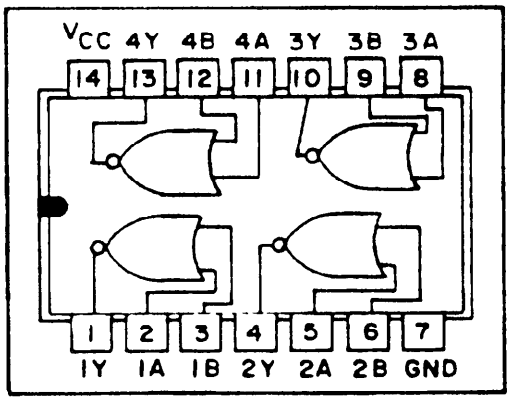

Device type 04

Case X

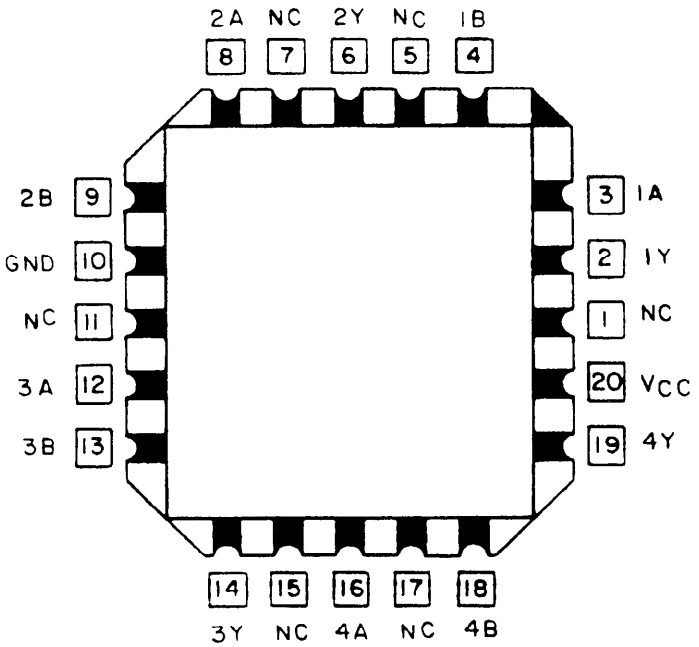

(TOP VIEW)

FIGURE 1. Logic diagram and terminal connections (top view) - Continued.

Source: https://assist.dla.mil -- Downloaded: 202610-21T14:02Z
Check the source to verify that this is the current version before use.

Device type 01

Truth table each gate				
Input				Output
A	B	C	D	Y
L	L	L	L	H
H	L	L	L	H
L	H	L	L	H
H	H	L	L	H
L	L	H	L	H
H	L	H	L	H
L	H	H	L	H
H	H	H	L	H
L	L	L	H	H
H	L	L	H	H
L	H	L	H	H
H	H	L	H	H
L	L	H	H	H
H	L	H	H	H
L	H	H	H	H
H	H	H	H	L

Positive logic Y = $\overline{ABCD}$

Device types 02 and 03

Truth table each gate		
Input		Output
A	B	Y
L	L	H
H	L	H
L	H	H
H	H	L

Positive logic Y = $\overline{AB}$

Device type 04


Truth table each gate		
Input		Output
A	B	Y
L	L	H
H	L	L
L	H	L
H	H	L

Positive logic Y = $\overline{A+B}$


FIGURE 2. Truth tables and logic equations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:02Z
Check the source to verify that this is the current version before use.

Device types 01, 02 and 03

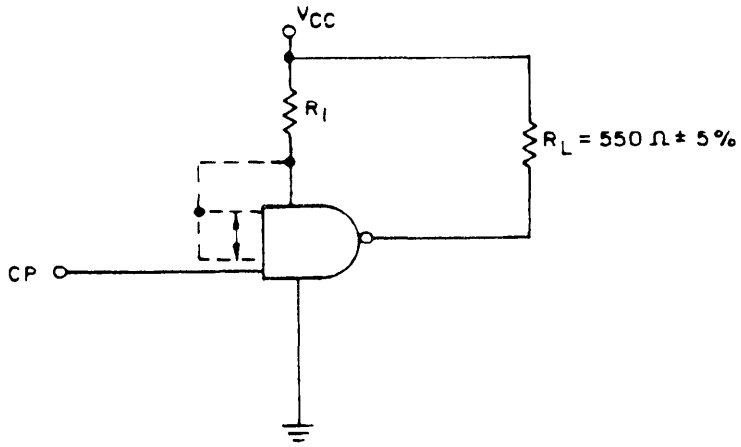


Device type 04

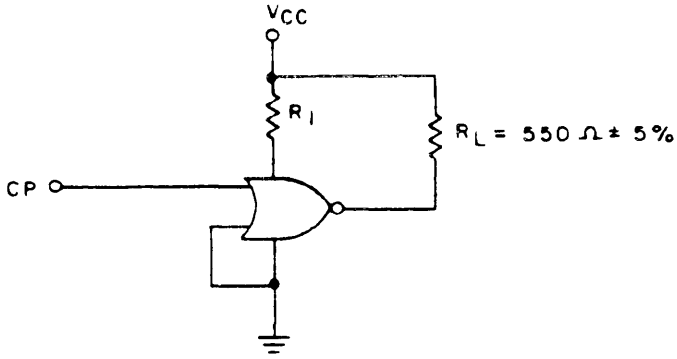

NOTES:
1. CP = 100 kHz ±50% square wave, duty cycle = 50 ±15%, V_{IL} = -0.5 V minimum to +0.7 V maximum; V_{IH} = 2.0 V minimum to 5.5 V maximum.
2. V_{CC} and R_1 shall be chosen to ensure 5.0 V minimum at the device terminal.

FIGURE 3. Burn-in and life test circuits (each buffer).


Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:02Z
Check the source to verify that this is the current version before use.

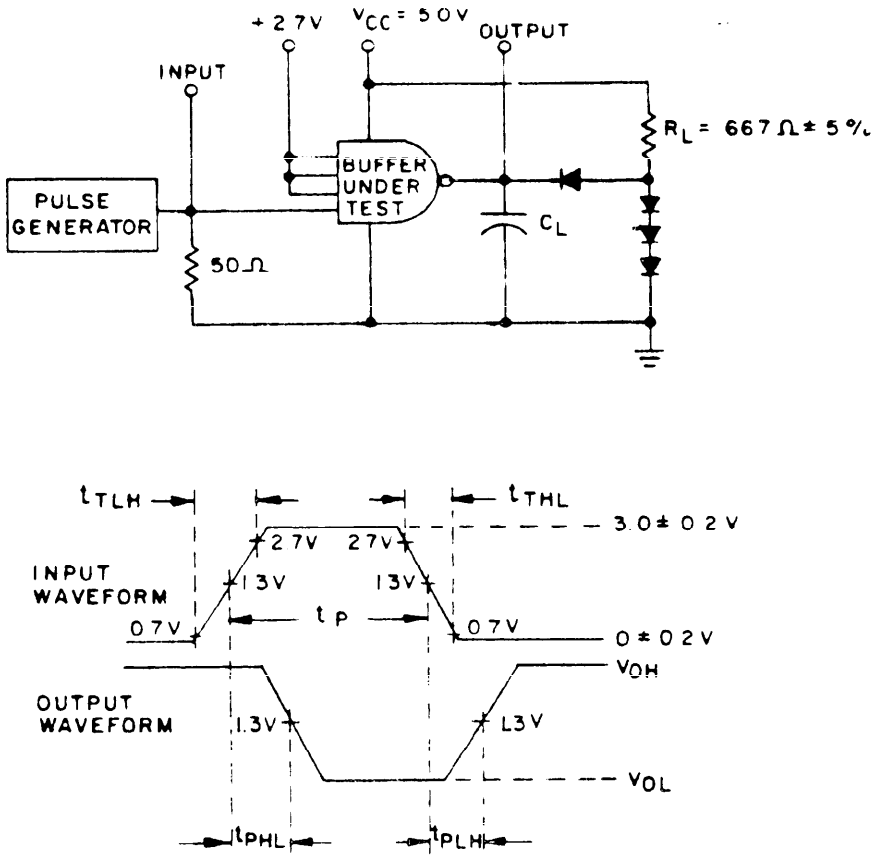


NOTES:
1. The pulse generator has the following characteristics: PRR ≤ 1 MHz, t_{TLH} ≤ 15 ns, t_{THL} ≤ 6 ns, t_p = 200 ns ±20 ns and Z_{OUT} ≅ 50Ω.
2. Including scope probe, wiring, and stray capacitance, without package in test fixture, C_L = 125 pF ±10%.
3. Voltage measurements are to be made with respect to network ground terminal.
4. All diodes are 1N3064 or equivalent.

FIGURE 4. Switching time test circuit and waveforms for device type 01 and 02.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:02Z
Check the source to verify that this is the current version before use.

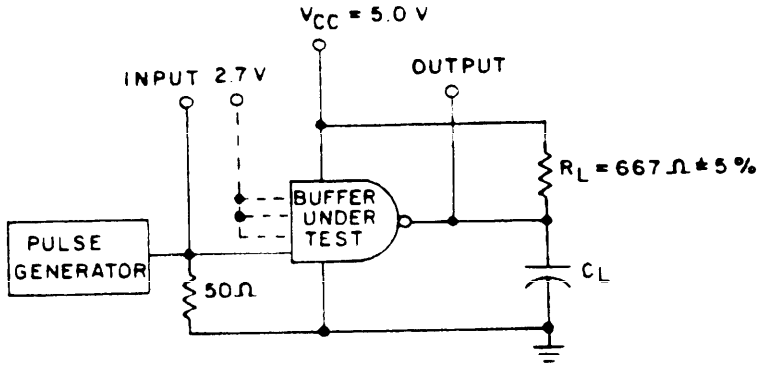


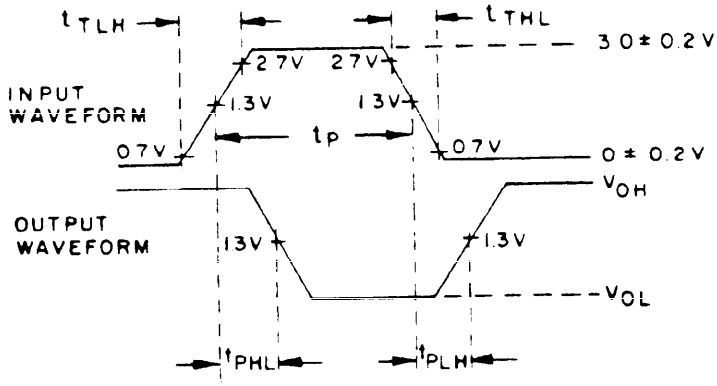

NOTES:
1. The pulse generator has the following characteristics: PRR $\leq$ 1 MHz, t_{TLH} $\leq$ 15 ns, $t_{THL} \leq$ 6 ns, t_p = 200 ±20 ns and $Z_{OUT} \cong$ 50Ω.
2. Including scope probe, wiring, and stray capacitance, without package in test fixture, C_L = 125 pF ±10%.
3. Voltage measurements are to be made with respect to network ground terminal.
4. All diodes are 1N3064 or equivalent.

FIGURE 5. Switching time test circuit and waveforms for device type 03.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:02Z
Check the source to verify that this is the current version before use.

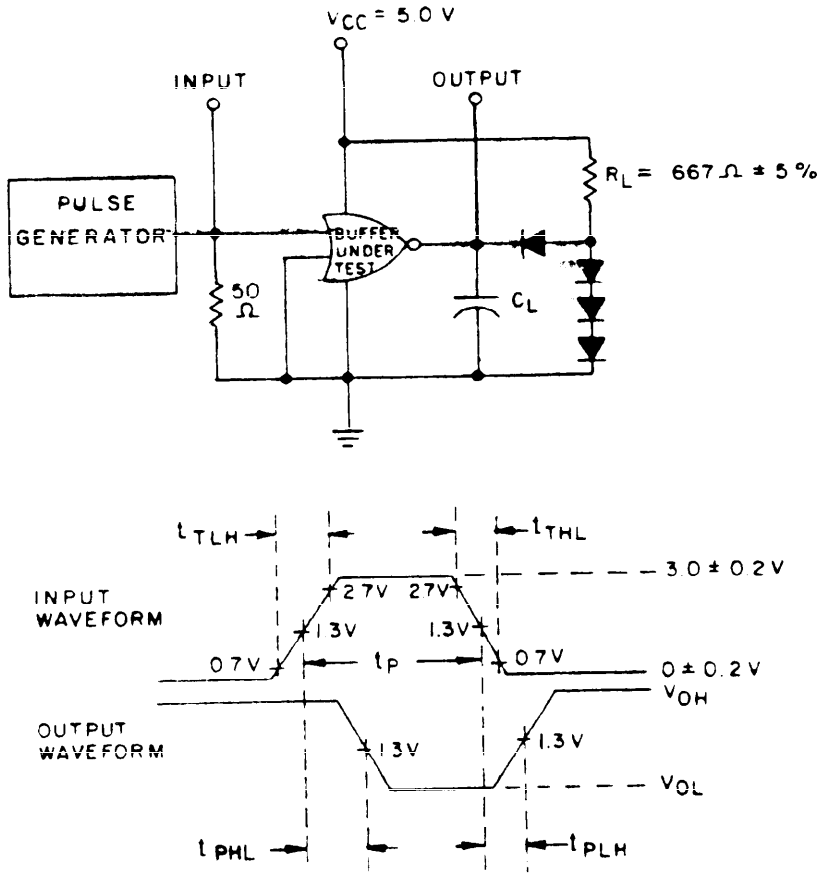

NOTES:
1. The pulse generator has the following characteristics: PRR $\leq$ 1 MHz, t_{TLH} $\leq$ 15 ns, $t_{THL} \leq$ 6 ns, t_p = 200 ±20 ns, and $Z_{OUT} \cong$ 50Ω.
2. C_L = 125 pF ±10% includes scope probe, wiring, and stray capacitance without package in test fixture.
3. All diodes are 1N3064 or equivalent.
4. Voltage measurements are to be made with respect to network ground terminal.

FIGURE 6. Switching time test circuit and waveforms for device type 04.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:02Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 01.
Terminal conditions (pins not designated may be high ≥ 2.0 V, low ≤ 0.7 V, or open).

Subgroup	Symbol	MIL-STD-883 method	Cases A,B,C,D, Case X 1/ Test no.	1 / 2 / 1A	2 / 3 / 1B	3 / 4 / NC	4 / 6 / 1C	5 / 8 / 1D	6 / 9 / 1Y	7 / 10 / GND	8 / 12 / 2Y	9 / 13 / 2A	10 / 14 / 2B	11 / 16 / NC	12 / 18 / 2C	13 / 19 / 2D	14 / 20 / V_{CC}	Measured terminal	Limits Min	Limits Max	Unit
L T_C = +25°C	V_{OL}	3007	1	2.0 V	2.0 V		2.0 V	2.0 V	12 mA	GND	12 mA	5.5 V	5.5 V		5.5 V	5.5 V	4.5 V	1Y		0.4	V
		3007	2	5.5 V	5.5 V		5.5 V	5.5 V	"	"		2.0 V	2.0 V		2.0 V	2.0 V	"	2Y		0.4	
	V_{OH}	3006	3	0.7 V	5.5 V		"	"	-1.2 mA	"		5.5 V	5.5 V		5.5 V	5.5 V	"	1Y	2.5		"
		"	4	5.5 V	0.7 V		"	"	"	"		"	"		"	"	"	1Y	"		"
		"	5	"	5.5 V		0.7 V	"	"	"		"	"		"	"	"	1Y	"		"
		"	6	"	"		5.5 V	0.7 V	"	"		"	"		"	"	"	1Y	"		"
		"	7	"	"		"	5.5 V	"	"	-1.2 mA	0.7 V	"		"	"	"	2Y	"		"
		"	8	"	"		"	"	"	"	"	5.5 V	0.7 V		"	"	"	2Y	"		"
		"	9	"	"		"	"	"	"	"	"	5.5 V		0.7 V	"	"	2Y	"		"
		"	10	"	"		"	"	"	"	"	"	5.5 V		5.5 V	0.7 V	"	2Y	"		"
	V_{IC}		11	18 mA	-18 mA					"							"	1A		-1.5	"
			12				-18 mA			"							"	1B		"	"
			13					-18 mA		"		-18 mA					"	1C		"	"
			14							"			-18 mA				"	1D		"	"
			15							"					-18 mA		"	2A		"	"
			16							"						-18 mA	"	2B		"	"
			17							"							"	2C		"	"
			18							"							"	2D		"	"
	I_{OS} 2/	3011	19	GND	GND		GND	GND	GND	"	GND	GND	GND		GND	GND	5.5 V	1Y	15	-100	mA
		3011	20							"							"	2Y	-15	-100	mA
	I_{IH1}	3010	21	2.7 V	GND		"	"		"		"	"		"	"	"	1A		20	µA
		"	22	GND	2.7 V		"	"		"		"	"		"	"	"	1B		"	"
		"	23	"	GND		2.7 V	"		"		"	"		"	"	"	1C		"	"
		"	24	"	"		GND	2.7 V		"		"	"		"	"	"	1D		"	"
		"	25	"	"		"	GND		"		2.7 V	"		"	"	"	2A		"	"
		"	26	"	"		"	"		"		GND	2.7 V		"	"	"	2B		"	"
		"	27	"	"		"	"		"		"	GND		2.7 V	"	"	2C		"	"
		"	28	"	"		"	"		"		"	"		GND	2.7 V	"	2D		"	"
	I_{IH2}	"	29	5.5 V	5.5 V		"	"		"		"	"		"	GND	"	1A		100	"
		"	30	GND	GND		"	"		"		"	"		"	"	"	1B		"	"
		"	31	"	"		5.5 V	"		"		"	"		"	"	"	1C		"	"
		"	32	"	"		GND	5.5 V		"		"	"		"	"	"	1D		"	"
		"	33	"	"		"	GND		"		5.5 V	"		"	"	"	2A		"	"
		"	34	"	"		"	"		"		GND	5.5 V		"	"	"	2B		"	"
		"	35	"	"		"	"		"		"	GND		5.5 V	"	"	2C		"	"
		"	36	"	"		"	"		"		"	"		GND	5.5 V	"	2D		"	"
	I_{IL} 3/	3009	37	0.4 V	5.5 V		5.5 V	5.5 V		"		5.5 V	5.5 V		5.5 V	"	"	1A	-160	-400	"
		"	38	5.5 V	0.4 V		5.5 V	"		"		"	"		"	"	"	1B	"	"	"
		"	39	"	5.5 V		0.4 V	"		"		"	"		"	"	"	1C	"	"	"
		"	40	"	"		5.5 V	0.4 V		"		"	"		"	"	"	1D	"	"	"
		"	41	"	"		"	5.5 V		"		0.4 V	"		"	"	"	2A	"	"	"
		"	42	"	"		"	"		"		5.5 V	0.4 V		"	"	"	2B	"	"	"
		"	43	"	"		"	"		"		"	5.5 V		0.4 V	"	"	2C	"	"	"
		"	44	"	"		"	"		"		"	"		5.5 V	0.4 V	"	2D	"	"	"
	I_{CCL}	3005	45	"	"		5.5 V	5.5 V		"		"	"		5.5 V	5.5 V	"	V_{CC}		6	mA
	I_{CCH}	3005	46	GND	GND		GND	GND		"		GND	GND		GND	GND	"	V_{CC}		1	mA
2	Same tests, terminal conditions and limits as for subgroup 1, except T_C = +125°C and V_{IC} tests are omitted.																				
3	Same tests, terminal conditions and limits as for subgroup 1, except T_C = -55°C and V_{IC} tests are omitted.																				

See footnotes at end of device type.

Source: https://assist.dla.mil -- Downloaded: 2026/0-21T14:02Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 01 - Continued
Terminal conditions (pins not designated may be high ≥ 2.0 V, low ≤ 0.7 V, or open).

Subgroup	Symbol	MIL-STD-883 method	Cases A,B,C,D, Case X 1/	1	2	3	4	5	6	7	8	9	10	11	12	13	14	Measured terminal	Limits Min	Limits Max	Unit
			Test no.	1A	1B	NC	1C	1D	1Y	GND	2Y	2A	2B	NC	2C	2D	V_{CC}				
9 T_C = +25°C	t_{PHL}	3003 (fig. 4)	47 48	IN	2.7 V		2.7 V	2.7 V	OUT	GND	OUT	IN	2.7 V		2.7 V	2.7 V	5.0 V	1A to 1Y 2A to 2Y			ns
	t_{PLH}	"	49 50	IN	2.7 V		2.7 V	2.7 V	OUT	"	OUT	IN	2.7 V		2.7 V	2.7 V	"	1A to 1Y 2A to 2Y			
10 T_C = +125°C	t_{PHL}	"	51 52	IN	2.7 V		2.7 V	2.7 V	OUT	"	OUT	IN	2.7 V		2.7 V	2.7 V	"	1A to 1Y 2A to 2Y			
	t_{PLH}	"	53 54	IN	2.7 V		2.7 V	2.7 V	OUT	"	OUT	IN	2.7 V		2.7 V	2.7 V	"	1A to 1Y 2A to 2Y			
11	Same tests, terminal conditions and limits as for subgroup 10, except T_C = -55°C.																				

NOTES:
1/ Case X pins not referenced are NC.
2/ I_{OS} limits for CKTS B, C, and D are -15 to -100 mA.
3/ I_{IL} limits for CKT B are -30 to -300 µA; CKT C, -150 to -380 µA; CKT D, -120 to -360 µA; CKT F, -5 to -400 µA.

Source: https://assist.dla.mil -- Downloaded: 2026/0-21T14:02Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 02.
Terminal conditions (pins not designated may be high ≥ 2.0 V, low ≤ 0.7 V, or open).

Subgroup	Symbol	MIL-STD-883 method	Cases A,B,C,D, Case X 1/	1	2	3	4	5	6	7	8	9	10	11	12	13	14	Measured terminal	Limits Min	Limits Max	Unit
				2	1	4	6	8	9	10	12	13	14	16	18	19	20				
			Test no.	1A	1B	1Y	2A	2B	2Y	GND	3Y	3A	3B	4Y	4A	4B	V_{CC}				
1 T_C = +25°C	V_{OL}	3007	1	2.0 V	2.0 V	12 mA	5.5 V	5.5 V		GND		5.5 V	5.5 V		5.5 V	5.5 V	4.5 V	1Y		0.4	V
			2	5.5 V	5.5 V		2.0 V	2.0 V	12 mA	"		5.5 V	5.5 V		"	"	"	2Y		"	
			3	"	"		5.5 V	5.5 V		"	12 mA	2.0 V	2.0 V		"	"	"	3Y		"	
			4	"	"		"	"		"		5.5 V	5.5 V	12 mA	2.0 V	2.0 V	"	4Y		"	
	V_{OH}	3006	5	0.7 V	"	1.2 mA	"	"		"		"	"		5.5 V	5.5 V	"	1Y	2.5		
			6	5.5 V	0.7 V	1.2 mA	"	"		"		"	"		"	"	"	1Y	"		
			7	"	5.5 V		0.7 V	"	-1.2 mA	"		"	"		"	"	"	2Y	"		
			8	"	"		5.5 V	0.7 V	-1.2 mA	"		"	"		"	"	"	2Y	"		
			9	"	"		"	5.5 V		"	-1.2 mA	0.7 V	"		"	"	"	3Y	"		
			10	"	"		"	"		"	-1.2 mA	5.5 V	0.7 V		"	"	"	3Y	"		
			11	"	"		"	"		"		"	5.5 V	-1.2 mA	0.7 V	"	"	4Y	"		
			12	"	"		"	"		"		"	5.5 V	-1.2 mA	5.5 V	0.7 V	"	4Y	"		
	V_{IC}		13	-18 mA						"							"	1A		1.5	V
			14		-18 mA					"							"	1B		"	
			15				-18 mA			"							"	2A		"	
			16					-18 mA		"							"	2B		"	
			17							"		-18 mA					"	3A		"	
			18							"			-18 mA				"	3B		"	
			19							"					-18 mA		"	4A		"	
			20							"						-18 mA	"	4B		"	
	I_{OS} 2/	3011	21	GND	GND	GND				"							5.5 V	1Y	-30	-130	mA
			22				GND	GND	GND	"		GND	GND				"	2Y	-30	-130	
			23							"	GND						"	3Y	-30	-130	
			24							"				GND	GND	GND	"	4Y	-30	-130	
	I_{IH1}	3010	25	2.7 V	GND		GND	GND		"		GND	GND		"	"	"	1A		20	μA
			26	GND	2.7 V		GND	"		"		"	"		"	"	"	1B		"	
			27	"	GND		2.7 V	"		"		"	"		"	"	"	2A		"	
			28	"	"		GND	2.7 V		"		"	"		"	"	"	2B		"	
			29	"	"		"	GND		"		2.7 V	"		"	"	"	3A		"	
			30	"	"		"	"		"		GND	2.7 V		"	"	"	3B		"	
			31	"	"		"	"		"		"	GND		2.7 V	"	"	4A		"	
			32	"	"		"	"		"		"	"		GND	2.7 V	"	4B		"	
	I_{IH2}	"	33	5.5 V	"		"	"		"		"	"		"	GND	"	1A		100	μA
			34	GND	5.5 V		"	"		"		"	"		"	"	"	1B		"	
			35	"	GND		5.5 V	"		"		"	"		"	"	"	2A		"	
			36	"	"		GND	5.5 V		"		"	"		"	"	"	2B		"	
			37	"	"		"	GND		"		5.5 V	"		"	"	"	3A		"	
			38	"	"		"	"		"		GND	5.5 V		"	"	"	3B		"	
			39	"	"		"	"		"		"	GND		5.5 V	"	"	4A		"	
			40	"	"		"	"		"		"	GND		GND	5.5 V	"	4B		"	
	I_{IL} 3/	3009	41	0.4 V	5.5 V		5.5 V	5.5 V		"		5.5 V	5.5 V		5.5 V	"	"	1A	-160	-400	μA
			42	5.5 V	0.4 V		5.5 V	"		"		"	"		"	"	"	1B	"	"	
			43	"	5.5 V		0.4 V	"		"		"	"		"	"	"	2A	"	"	
			44	"	"		5.5 V	0.4 V		"		"	"		"	"	"	2B	"	"	
			45	"	"		"	5.5 V		"		0.4 V	"		"	"	"	3A	"	"	
			46	"	"		"	"		"		5.5 V	0.4 V		"	"	"	3B	"	"	
			47	"	"		"	"		"		"	5.5 V		0.4 V	"	"	4A	"	"	
			48	"	"		"	"		"		"	"		5.5 V	0.4 V	"	4B	"	"	
	I_{CCL}	3005	49	"	"		"	"		"		"	"		5.5 V	5.5 V	"	V_{CC}		12	mA
	I_{CCH}	3005	50	GND	GND		GND	GND		"		GND	GND		GND	GND	"	V_{CC}		2	mA

See footnotes at end of device type.

Source: https://assist.dla.mil -- Downloaded: 2026/10-21T14:02Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 02 - Continued

Terminal conditions (pins not designated may be high ≥ 2.0 V, low ≤ 0.7 V, or open).

Subgroup	Symbol	MIL-STD-883 method	Cases A,B,C,D,	1	2	3	4	5	6	7	8	9	10	11	12	13	14	Measured terminal	Limits		Unit
			Case X 1/	2	3	4	6	8	9	10	12	13	14	16	18	19	20		Min	Max	
			Test no.	1A	1B	1Y	2A	2B	2Y	GND	3Y	3A	3B	4Y	4A	4B	V_{CC}				
2	Same tests, terminal conditions and limits as for subgroup 1, except T_C = +125° C and V_{IC} tests are omitted.																				
3	Same tests, terminal conditions and limits as for subgroup 1, except T_C = -55° C and V_{IC} tests are omitted.																				
9 T_C = +25°C	t_{PHL}	3003 (fig. 4)	51	IN	2.7 V	OUT	IN	2.7 V	OUT	GND	OUT	IN	2.7 V	OUT	IN	2.7 V	5.0 V	1A to 1Y		25	ns
		"	52							"							"	2A to 2Y		"	
		"	53							"							"	3A to 3Y		"	
		"	54							"							"	4A to 4Y		"	
	t_{PLH}	"	55	IN	2.7 V	OUT	IN	2.7 V	OUT	"	OUT	IN	2.7 V	OUT	IN	2.7 V	"	1A to 1Y		"	
		"	56							"							"	2A to 2Y		"	
		"	57							"							"	3A to 3Y		"	
		"	58							"							"	4A to 4Y		"	
10 T_C = +25°C	t_{PHL}	"	59	IN	2.7 V	OUT	IN	2.7 V	OUT	"	OUT	IN	2.7 V	OUT	IN	2.7 V	"	1A to 1Y		30	
		"	60							"							"	2A to 2Y		"	
		"	61							"							"	3A to 3Y		"	
		"	62							"							"	4A to 4Y		"	
	t_{PLH}	"	63	IN	2.7 V	OUT	IN	2.7 V	OUT	"	OUT	IN	2.7 V	OUT	IN	2.7 V	"	1A to 1Y		"	
		"	64							"							"	2A to 2Y		"	
		"	65							"							"	3A to 3Y		"	
		"	66							"							"	4A to 4Y		"	
11	Same tests, terminal conditions, and limits as for subgroup 10, except T_C = -55° C.																				

NOTES:

1/ Case X pins not referenced are NC.

2/ I_{OS} limits for CKTS B, C, D, and E are -15 to -100 mA.

3/ I_{IL} limits for CKT B are -30 to -300 µA; CKT C, -150 to -380 µA; CKT D, -120 to -360 µA; CKT E, -150 to -390 µA; CKT F, -5 to -400 µA.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:02Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 03.
Terminal conditions (pins not designated may be high ≥ 2.0 V, low ≤ 0.7 V, or open).

Subgroup	Symbol	MIL-STD-883 method	Cases A,B,C,D Case X 1/ Test no.	1	2	3	4	5	6	7	8	9	10	11	12	13	14	Measured terminal	Limits Min	Limits Max	Unit
				2	3	4	6	8	9	10	12	13	14	16	18	19	20				
				1A	1B	1Y	2A	2B	2Y	GND	3Y	3B	3Y	4A	4B	4Y	V_{CC}				
1 T_C +25°C	V_{OL}	3007	1	2.0 V	2.0 V	12 mA	5.5 V	5.5 V		GND		5.5 V	5.5 V		5.5 V	5.5 V	4.5 V	1Y		0.4	V
		"	2	5.5 V	5.5 V		2.0 V	2.0 V	12 mA	"		5.5 V	5.5 V		"	"	"	2Y		"	"
		"	3	"	"		5.5 V	5.5 V		"	12 mA	2.0 V	2.0 V		"	"	"	3Y		"	"
		"	4	"	"		"	"		"		5.5 V	5.5 V	12 mA	2.0 V	2.0 V	"	4Y		"	"
	I_{IFX}	"	5	0.7 V	"	5.5 V	"	"		"		"	"		"	"	"	1Y		250	µA
		"	6	5.5 V	0.7 V	5.5 V	"	"		"		"	"		"	"	"	1Y		"	"
		"	7	"	5.5 V		0.7 V	"	5.5 V	"		"	"		"	"	"	2Y		"	"
		"	8	"	"		5.5 V	0.7 V	5.5 V	"		"	"		"	"	"	2Y		"	"
		"	9	"	"		"	5.5 V		"	5.5 V	0.7 V	"		"	"	"	3Y		"	"
		"	10	"	"		"	"		"	5.5 V	5.5 V	"		"	"	"	3Y		"	"
		"	11	"	"		"	"		"		"	0.7 V	5.5 V	0.7 V	"	"	4Y		"	"
		"	12	"	"		"	"		"		"	5.5 V	5.5 V	5.5 V	0.7 V	"	4Y		"	"
	V_{IC}		13	-18 mA						"								1A		-1.5	V
			14		-18 mA					"								1B		"	"
			15				-18 mA			"								2A		"	"
			16					-18 mA		"								2B		"	"
			17							"		-18 mA						3A		"	"
			18							"			-18 mA					3B		"	"
			19							"					-18 mA			4A		"	"
			20							"						-18 mA		4B		"	"
	I_{IH1}	3010	21	2.7 V	GND		GND	GND		"		GND	GND		GND	GND	5.5 V	1A		20	µA
		"	22	GND	2.7 V		GND	"		"		"	"		"	"	"	1B		"	"
		"	23	"	GND		2.7 V	"		"		"	"		"	"	"	2A		"	"
		"	24	"	"		GND	2.7 V		"		"	"		"	"	"	2B		"	"
		"	25	"	"		"	GND		"		2.7 V	"		"	"	"	3A		"	"
		"	26	"	"		"	"		"		GND	2.7 V		"	"	"	3B		"	"
		"	27	"	"		"	"		"		"	GND		2.7 V	"	"	4A		"	"
		"	28	"	"		"	"		"		"	"		GND	2.7 V	"	4B		"	"
	I_{IH2}	"	29	5.5 V	"		"	"		"		"	"		"	GND	"	1A		100	"
		"	30	GND	5.5 V		"	"		"		"	"		"	"	"	1B		"	"
		"	31	"	GND		5.5 V	"		"		"	"		"	"	"	2A		"	"
		"	32	"	"		GND	5.5 V		"		"	"		"	"	"	2B		"	"
		"	33	"	"		"	GND		"		5.5 V	"		"	"	"	3A		"	"
		"	34	"	"		"	"		"		GND	5.5 V		"	"	"	3B		"	"
		"	35	"	"		"	"		"		"	GND		5.5 V	"	"	4A		"	"
		"	36	"	"		"	"		"		"	GND		GND	5.5 V	"	4B		"	"
	I_{IL} 2/	3009	37	0.4 V	5.5 V		5.5 V	5.5 V		"		5.5 V	5.5 V		5.5 V	"	"	1A	-160	-400	"
		"	38	5.5 V	0.4 V		5.5 V	"		"		"	"		"	"	"	1B	"	"	"
		"	39	"	5.5 V		0.4 V	"		"		"	"		"	"	"	2A	"	"	"
		"	40	"	"		5.5 V	0.4 V		"		"	"		"	"	"	2B	"	"	"
		"	41	"	"		"	5.5 V		"		0.4 V	"		"	"	"	3A	"	"	"
		"	42	"	"		"	"		"		5.5 V	0.4 V		"	"	"	3B	"	"	"
		"	43	"	"		"	"		"		"	5.5 V		0.4 V	"	"	4A	"	"	"
		"	44	"	"		"	"		"		"	"		5.5 V	0.4 V	"	4B	"	"	"
	I_{CCL}	3005	45	"	"		"	"		"		"	"		5.5 V	5.5 V	"	V_{CC}		12	mA
	I_{CCH}	3005	46	GND	GND		GND	GND	"	"		GND	GND		GND	GND	"	V_{CC}		2	mA
2	Same tests, terminal conditions and limits as for subgroup 1, except T_C = +125°C and V_{IC} tests are omitted.																				
3	Same tests, terminal conditions and limits as for subgroup 1, except T_C = -55°C and V_{IC} tests are omitted.																				

See footnotes at end of device type.

Source: https://assist.dla.mil -- Downloaded: 202610-21T14:02Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 03 - Continued

nal conditions (pins not designated may be high ≥ 2.0 V, low ≤ 0.7 V, or open).

Subgroup	Symbol	MIL-STD-883 method	Cases A,B,C,L Case X Test n	1	2	3	4	5	6	7	8	9	10	11	12	13	14	Measured terminal	Limits Min	Limits Max	Unit
				2	3	4	6	8	9	10	12	13	14	16	18	19	20				
				1A	1B	1Y	2A	2B	2Y	GND	3Y	3B	3Y	4A	4B	4Y	V_{CC}				
9 T_C = +25°C	t_{PHL}	3001 (fig. 5)	47	IN	2.7 V	OUT	IN	2.7 V	OUT	GND	OUT	IN	2.7 V	OUT	IN	2.7 V	5.0 V	1A to 1Y	3	39	ns
		"	48							"						"	"	2A to 2Y	"	"	
		"	49							"						"	"	3A to 3Y	"	"	
		"	50							"						"	"	4A to 4Y	"	"	
	t_{PLH}	"	51	IN	2.7 V	OUT	IN	2.7 V	OUT	"	OUT	IN	2.7 V	OUT	IN	2.7 V	"	1A to 1Y	"	45	
		"	52							"						"	"	2A to 2Y	"	"	
		"	53							"						"	"	3A to 3Y	"	"	
		"	54							"						"	"	4A to 4Y	"	"	
10 T_C = +25°C	t_{PHL}	"	55	IN	2.7 V	OUT	IN	2.7 V	OUT	"	OUT	IN	2.7 V	OUT	IN	2.7 V	"	1A to 1Y	"	51	
		"	56							"						"	"	2A to 2Y	"	"	
		"	57							"						"	"	3A to 3Y	"	"	
		"	58							"						"	"	4A to 4Y	"	"	
	t_{PLH}	"	59	IN	2.7 V	OUT	IN	2.7 V	OUT	"	OUT	IN	2.7 V	OUT	IN	2.7 V	"	1A to 1Y	"	51	
		"	60							"						"	"	2A to 2Y	"	"	
		"	61							"						"	"	3A to 3Y	"	"	
		"	62							"						"	"	4A to 4Y	"	"	
11	Same tests, terminal cond			is and limits as for subgroup 10, except T_C = -55°C																	

1/ Case X pins not referenced ar

2/ I_{IL} limits for CKT B are -30 to -300 µA; CKT C, -150 to -380 µA; CKT D, -120 to -360 µA; CKT F, -5 to -400

MIL-M-38510/5D21

Source: https://assist.dla.mil -- Downloaded: 20261021-21T14:02Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 04.

Terminal conditions (pins not designated may be high ≥ 2.0 V, low ≤ 0.7 V, or open).

Subgroup	Symbol	MIL-STD-883 method	Cases A,B,C,D Case X 1/	1	2	3	4	5	6	7	8	9	10	11	12	13	14	Measured terminal	Limits Min	Limits Max	Unit
				2	3	4	6	8	9	10	12	13	14	16	18	19	20				
			Test no.	1Y	1A	1B	2Y	2A	2B	GND	3Y	3B	3Y	4A	4B	4Y	V_{CC}				
1 +25°C	V_{IL}	3007	1	12 mA	2.0 V	GND				GND							4.5 V	1Y		0.4	V
		"	2	12 mA	GND	2.0 V				"							"	1Y		"	"
		"	3				12 mA	2.0 V	GND	"							"	2Y		"	"
		"	4				12 mA	GND	2.0 V	"							"	2Y		"	"
		"	5							"	2.0 V	GND	12 mA				"	3Y		"	"
		"	6							"	GND	2.0 V	12 mA				"	3Y		"	"
		"	7							"				2.0 V	GND	12 mA	"	4Y		"	"
		"	8							"				GND	2.0 V	12 mA	"	4Y		"	"
	V_{IH}	3006	9	-1.2 mA	0.7 V	0.7 V				"								1Y	2.5		V
		"	10				-1.2 mA	0.7 V	0.7 V	"	0.7 V	0.7 V	-1.2 mA				"	2Y	"		"
		"	11							"				0.7 V	0.7 V	-1.2 mA	"	3Y	"		"
		"	12							"							"	4Y	"		"
	V_{IC}		13		-18 mA	-18 mA		-18 mA	-18 mA	"	-18 mA	-18 mA		-18 mA	-18 mA		"	1A		-1.5	"
			14							"							"	1B		"	"
			15							"							"	2A		"	"
			16							"							"	2B		"	"
			17							"							"	3A		"	"
			18							"							"	3B		"	"
			19							"							"	4A		"	"
			20							"							"	4B		"	"
	I_{CC} 2/	3011	21	GND	GND	GND	GND	GND	GND	"	GND	GND	GND	GND	GND	GND	5.5 V	1Y	-30	-130	mA
		"	22							"							"	2Y	-30	-130	"
		"	23							"							"	3Y	-30	-130	"
		"	24							"							"	4Y	-30	-130	"
	I_{IH1}	3010	25		2.7 V	GND		GND	GND	"	GND	GND		"	"	"	"	1A		20	µA
		"	26		GND	2.7 V		GND	"	"	"	"		"	"	"	"	1B		"	"
		"	27			GND		2.7 V	2.7 V	"	"	"		"	"	"	"	2A		"	"
		"	28					GND	GND	"	"	"		"	"	"	"	2B		"	"
		"	29							"	2.7 V	2.7 V		"	"	"	"	3A		"	"
		"	30							"	GND	GND		"	"	"	"	3B		"	"
		"	31							"	"	"		2.7 V	2.7 V	"	"	4A		"	"
		"	32							"	"	"		GND	"	"	"	4B		"	"
	I_{IH2}	"	33		5.5 V	"		"	"	"	"	"		"	GND	"	"	1A		100	µA
		"	34		GND	5.5 V		"	"	"	"	"		"	"	"	"	1B		"	"
		"	35		"	GND		5.5 V	5.5 V	"	"	"		"	"	"	"	2A		"	"
		"	36		"	"		GND	GND	"	"	"		"	"	"	"	2B		"	"
		"	37		"	"		"	"	"	"	"		"	"	"	"	3A		"	"
		"	38		"	"		"	"	"	"	"		"	"	"	"	3B		"	"
		"	39		"	"		"	"	"	5.5 V	5.5 V		5.5 V	5.5 V	"	"	4A		"	"
		"	40		"	"		"	"	"	GND	GND		GND	"	"	"	4B		"	"
	I_{IL} 3/	3009	41		0.4 V	5.5 V	5.5 V	5.5 V	5.5 V	"	5.5 V	5.5 V		5.5 V	"	"	"	1A	-160	-400	µA
		"	42		5.5 V	"	0.4 V	5.5 V	"	"	"	"		"	"	"	"	1B	"	"	"
		"	43		"	"	5.5 V	0.4 V	"	"	"	"		"	"	"	"	2A	"	"	"
		"	44		"	"	"	5.5 V	0.4 V	"	"	"		"	"	"	"	2B	"	"	"
		"	45		"	"	"	"	5.5 V	"	0.4 V	0.4 V		"	"	"	"	3A	"	"	"
		"	46		"	"	"	"	"	"	5.5 V	5.5 V		"	"	"	"	3B	"	"	"
		"	47		"	"	"	"	"	"	"	"		0.4 V	"	"	"	4A	"	"	"
		"	48		"	"	"	"	"	"	"	"		5.5 V	0.4 V	"	"	4B	"	"	"
	I_{CL}	3005	49		"	"		"	"	"	"	"		5.5 V	5.5 V		"	V_{CC}		13.8	mA
	I_{CH}	3005	50		GND	GND		GND	GND	"	GND	GND		GND	GND		"	V_{CC}		3.6	mA

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026/0-21T14:02Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 04 - Continued
Terminal conditions (pins not designated may be high ≥ 2.0 V, low ≤ 0.7 V, or open).

Subgroup	Symbol	MIL-STD-883 method	Cases A,B,C,D, Case X 1/	1	2	3	4	5	6	7	8	9	10	11	12	13	14	Measured terminal	Limits Min	Limits Max	Unit
				2	3	4	6	8	9	10	12	13	14	16	18	19	20				
			Test no.	1Y	1A	1B	2Y	2A	2B	GND	3A	3B	3Y	4A	4B	4Y	V_{CC}				
2	Same tests, terminal conditions and limits as for subgroup 1, except T_C = +125° C and V_{IC} test s are omitted.																				
3	Same tests, terminal conditions and limits as for subgroup 1, except T_C = -55° C and V_{IC} tests are omitted.																				
9 T_C +25°C	t_{PHL}	3003 (fig. 6)	51	OUT	IN	GND				GND							5.0 V	1A to 1Y	2	25	ns
		"	52	OUT	GND	IN				"							"	1B to 1Y	"	"	"
		"	53				OUT	IN	GND	"							"	2A to 2Y	"	"	"
		"	54				OUT	GND	IN	"							"	2B to 2Y	"	"	"
		"	55							"	IN	GND	OUT				"	3A to 3Y	"	"	"
		"	56							"	GND	IN	OUT				"	3B to 3Y	"	"	"
		"	57							"				IN	GND	OUT	"	4A to 4Y	"	"	"
		"	58							"				GND	IN	OUT	"	4B to 4Y	"	"	"
	t_{PLH}	"	59	OUT	IN	GND				"							"	1A to 1Y	"	"	"
		"	60	OUT	GND	IN				"							"	1B to 1Y	"	"	"
		"	61				OUT	IN	GND	"							"	2A to 2Y	"	"	"
		"	62				OUT	GND	IN	"							"	2B to 2Y	"	"	"
		"	63							"	IN	GND	OUT				"	3A to 3Y	"	"	"
		"	64							"	GND	IN	OUT				"	3B to 3Y	"	"	"
		"	65							"				IN	GND	OUT	"	4A to 4Y	"	"	"
		"	66							"				GND	IN	OUT	"	4B to 4Y	"	"	"
10 T_C +125°C	t_{PHL}	"	67	OUT	IN	GND				"							"	1A to 1Y	"	30	"
		"	68	OUT	GND	IN				"							"	1B to 1Y	"	"	"
		"	69				OUT	IN	GND	"							"	2A to 2Y	"	"	"
		"	70				OUT	GND	IN	"							"	2B to 2Y	"	"	"
		"	71							"	IN	GND	OUT				"	3A to 3Y	"	"	"
		"	72							"	GND	IN	OUT				"	3B to 3Y	"	"	"
		"	73							"				IN	GND	OUT	"	4A to 4Y	"	"	"
		"	74							"				GND	IN	OUT	"	4B to 4Y	"	"	"
	t_{PLH}	"	75	OUT	IN	GND				"							"	1A to 1Y	"	"	"
		"	76	OUT	GND	IN				"							"	1B to 1Y	"	"	"
		"	77				OUT	IN	GND	"							"	2A to 2Y	"	"	"
		"	78				OUT	GND	IN	"							"	2B to 2Y	"	"	"
		"	79							"	IN	GND	OUT				"	3A to 3Y	"	"	"
		"	80							"	GND	IN	OUT				"	3B to 3Y	"	"	"
		"	81							"				IN	GND	OUT	"	4A to 4Y	"	"	"
		"	82							"				GND	IN	OUT	"	4B to 4Y	"	"	"
11	Same tests, terminal conditions and limits as for subgroup 10, except T_C = -55°C.																				

NOTES:
1/ Case X pins not referenced are NC.
2/ I_{OS} limits for CKTS A, C, and E are -15 to -100 mA.
3/ I_{IL} limits for CKTS B and E are -30 to -300 µA; CKT D, -120 to -360 µA. CKT F, -5 to -400 µA.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:02Z
Check the source to verify that this is the current version before use.

6.2 Intended use. Microcircuits conforming to this specification are intended for original equipment design applications and logistic support of existing equipment.

6.3 Ordering data. The acquisition document should specify the following:

a. Complete part number (see 1.2).

b. Requirements for delivery of one copy of the quality conformance inspection data pertinent to the device inspection lot to be supplied with each shipment by the device manufacturer, if applicable.

c. Requirements for certificate of compliance, if applicable.

d. Requirements for notification of change of product or process to the contracting activity in addition to notifying qualifying activity, if applicable.

e. Requirements for failure analysis (including required test condition of method 5003 of MIL-STD-883), corrective action, and reporting of results, if applicable.

f. Requirements for product assurance options.

g. Requirements for special carriers, lead lengths, or lead forming, if applicable, these requirements shall not affect the part number. Unless otherwise specified, these requirements shall not apply to direct purchase by or direct shipment to the Government.

h. Requirements for "JAN" marking.

6.4 Abbreviations, symbols, and definitions. The abbreviations, symbols, and definitions used herein are defined in MIL-M-38510, MIL-STD-1331, and as follows:

GND	Ground zero voltage potential.
I_{IN}	Current flowing into an input terminal.
V_{IC}	Input clamp voltage.
V_{IN}	Voltage level at an input terminal.

6.5 Logistic support. Lead materials and finishes (see 3.3) are interchangeable. Unless otherwise specified, microcircuits acquired for Government logistic support will be acquired to device class B (see 1.2.2) and lead material and finish C (see 3.3). Longer length leads and lead forming shall not affect the part number.

6.6 Substitutability. The cross-reference information below is presented for the convenience of users. Microcircuits covered by this specification will functionally replace the listed generic-industry type. Generic-industry microcircuit types may not have equivalent operational performance characteristics across military temperature ranges or reliability factors equivalent to MIL-M-38510 device types and may have slight physical variations in relation to case size. The presence of this information shall not be deemed as permitting substitution of generic-industry types for MIL-M-35810 types or as a waiver of any of the provisions of MIL-M-38510.

Military device type	Generic-industry type
01	54LS40
02	54LS37
03	54LS38
04	54LS28

6.7 Manufacturers' designation. Manufacturers' circuits which form a part of this specification are designated with an "X" as shown in table IV herein.

Source: https://assist.dla.mil -- Downloaded: 2026\10-21T14:02Z
Check the source to verify that this is the current version before use.

TABLE IV. Manufacturers' designation.

Device Type	Circuits					
	A	B	C	D	E	F
	Texas Instruments	Signetics Corp.	National Semiconductor Corporation	Raytheon Company	Motorola Inc.	Fairchild Semi-conductor
01	X	X	X	X	X	X
02	X	X	X	X	X	X
03	X	X	X	X	X	X
04	X	X	---	X	X	X

6.8 Changes from previous issue. Asterisks are not used in this revision to identify changes with respect to the previous issue, due to the extensiveness of the changes.

Custodians:
Army - ER
Navy - EC
Air Force - 17

Review activities:
Army - AR, MI
Navy - SH, OS
Air Force - 11, 19, 85, 99
DLA - ES

User activities:
Army - SM
Navy - AS, CG, MC

Agent:
DLA-ES

Preparing activity:
Air Force - 17

(Project 5962-0593-2)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:02Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:02Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE AIR FORCE

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 73236 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE AIR FORCE

Commander
Rome Air Development Center
Attn: RBE-2
Griffiss AFB, NY 13441

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:02Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-M-38510/302C	MONOLITHIC SILICON MICROCIRCUITS, DIGITAL, SCHOTTKY TTL, LOW POWER BUFFERS

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*:

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426

PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:02Z
Check the source to verify that this is the current version before use.