MILITARY SPECIFICATION

# MICROCIRCUITS, DIGITAL, LOW POWER SCHOTTKY TTL, DATA SELECTOR/MULTIPLEXER WITH THREE-STATE OUTPUTS, CASCADABLE, MONOLITHIC SILICON

This specification is approved for use by all Departments and Agencies of the Department of Defense.

## 1. SCOPE

1.1 Scope. This specification covers the detail requirements for monolithic silicon, low power Schottky TTL, data selector/multiplexer (three-state) logic microcircuits. Two product assurance classes and a choice of case outlines and lead finishes are provided and are reflected in the complete part number.

1.2 Part number. The part number shall be in accordance with MIL-M-38510.

1.2.1 Device type. The device type shall be as follows:

| Device type | Circuit |
|---|---|
| 01 | Eight-input data selector/multiplexer, with enable. |
| 02 | Dual, four-input data selector/multiplexer, with enable. |
| 03, 04 | Quad, two-input data selector/multiplexer, with enable. |
| 05 | Eight-input data selector/multiplexer, 3-state outputs, with enable. |
| 06, 07 | Quad, two-input data selector/multiplexer, 3-state outputs with enable. |
| 08 | Dual, four-input data selector/multiplexer, 3-state outputs, with enable. |
| 09 | Cascadable, quad, two-input data selector/multiplexer, with storage. |

1.2.2 Device class. Device class shall be the product assurance level as defined in MIL-M-38510.

1.2.3 Case outline. The case outline shall be designated as follows:

| Outline letter | Case outline (see MIL-M-38510, appendix C) |
|---|---|
| 2 | C-2 (20-terminal .350" x .350", square chip carrier package) |
| E | D-2 (16-lead 1/4" x 7/8", dual-in-line package) |
| F | F-5 (16-lead 1/4" x 3/8", flat package) |

1.3 Absolute maximum ratings.

| | |
|---|---|
| Supply voltage range | -0.5 V to 7.0 V |
| Input voltage range | -1.5 V at -18 mA to 7.0 V |
| Storage temperature range | -65°C to 150°C |

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Rome Air Development Center, RBRD, Griffiss AFB, NY 13441, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:05Z
Check the source to verify that this is the current version before use.

| | |
|---|---|
| Maximum power dissipation, $P_D$ | |
| Device types 01, 02 | 55 mW |
| Device type 03 | 88 mW |
| Device type 04 | 44 mW |
| Device type 05 | 66 mW 1/ |
| Device types 06, 07 | 104.5 mW |
| Device type 08 | 77 mW |
| Device type 09 | 115.5 mW |
| Lead temperature (soldering, 10 seconds) | 300°C |
| Thermal resistance, junction-to-case ($\theta_{JC}$) | |
| Cases E and F | (See MIL-M-38510, appendix C) |
| Case 2 | 60°C/W 3/ |
| Junction temperature ($T_J$) 4/ | 175°C |

1.4 Recommended operating conditions:

| | |
|---|---|
| Supply voltage ($V_{CC}$) | 4.5 V minimum to 5.5 V maximum |
| Minimum high level input voltage ($V_{IH}$) | 2.0 V |
| Maximum low level input voltage ($V_{IL}$) | 0.7 V |
| Normalized fanout (each output) 2/ | |
| Low logic level | 10 maximum |
| High logic level | 20 maximum |
| Case operating temperature range ($T_C$) | -55°C to 125°C |
| Setup time $t_{(SETUP)}$ type 09 data to clock | 15 ns |
| Setup time $t_{(SETUP)}$ type 09 word select to clock | 25 ns |
| Hold time $t_{(HOLD)}$ type 09 data to clock | 5 ns |
| Hold time $t_{(HOLD)}$ type 09 word select to clock | 0 ns |
| Clock pulse width $t_{P(CLOCK)}$ type 09 high or low | 20 ns |

## 2. APPLICABLE DOCUMENTS

2.1 Government specifications and standards. Unless otherwise specified, the following specifications and standards, of the issue listed in that issue of the Department of Defense Index of Specifications and Standards specified in the solicitation, form a part of this specification to the extent specified herein.

SPECIFICATION

MILITARY

MIL-M-38510 - Microcircuits, General Specification for.

STANDARD

MILITARY

MIL-STD-883 - Test Methods and Procedures for Microelectronics.

(Copies of specifications, standards, handbooks, drawings, and publications required by the manufacturers in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

---

1/ Must withstand the added $P_D$ due to short circuit test (e.g., $I_{OS}$).
2/ Device will fanout in both high and low levels to the specified number of data inputs on the same device type as that being tested.
3/ When a thermal resistance value is included in MIL-M-38510 appendix C, it shall supersede the value stated herein.
4/ Maximum junction temperature shall not be exceeded except for allowable short duration burn-in screening conditions per method 5004 of MIL-STD-883.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:05Z
Check the source to verify that this is the current version before use.

2.2 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence.

3. REQUIREMENTS

3.1 Detail specification. The individual item requirements shall be in accordance with MIL-M-38510, and as specified herein.

3.2 Design, construction, and physical dimensions. The design, construction, and physical dimensions shall be as specified in MIL-M-38510 and herein.

3.2.1 Terminal connections and logic diagrams. The terminal connections and logic diagrams shall be as specified on figures 1 and 2.

3.2.2 Truth tables. The truth tables shall be as specified on figure 3.

3.2.3 Schematic circuits. Schematic circuits shall be submitted to the preparing activity prior to inclusion of a manufacturer's device in the specification and shall be submitted to the qualifying activity and agent activity (DESC-ECS) as a prerequisite for qualification. All qualified manufacturers schematics shall be maintained by the agent activity and will be available upon request.

3.3 Lead material and finish. Lead material and finish shall be in accordance with MIL-M-38510 (see 6.5).

3.4 Electrical performance characteristics. The electrical performance characteristics are as specified in table I, and apply over the full recommended case operating temperature range, unless otherwise specified.

3.5 Electrical test requirements. The electrical test requirements for each device class shall be the subgroups specified in table II. The electrical tests for each subgroup are described in table III.

3.6 Marking. Marking shall be in accordance with MIL-M-38510.

3.7 Microcircuit group assignment. The devices covered by this specification shall be in microcircuit group number 11 (see MIL-M-38510, appendix E).

4. QUALITY ASSURANCE PROVISIONS

4.1 Sampling and inspection. Sampling and inspection procedures shall be in accordance with MIL-M-38510 and methods 5005 and 5007, as applicable, or MIL-STD-883 except as modified herein.

4.2 Screening. Screening shall be in accordance with method 5004 of MIL-STD-883, and shall be conducted on all devices prior to qualification and quality conformance inspection. The following additional criteria shall apply:

a. Burn-in test (method 1015 of MIL-STD-883).

(1) Test condition D or E, using the circuit shown on figure 4, or equivalent.

(2) $T_A$ = 125°C minimum.

b. Interim and final electrical test parameters shall be as specified in table II, except interim electrical parameters test prior to burn-in is optional at the discretion of the manufacturer.

c. The percent defective allowable (PDA) shall be as specified in MIL-M-38510.

4.3 Qualification inspection. Qualification inspection shall be in accordance with MIL-M-38510. Inspections to be performed shall be those specified in method 5005 of MIL-STD-883 and herein for groups A, B, C, and D inspections (see 4.4.1 through 4.4.4).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:05Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical performance characteristics.

| Test | Symbol | Conditions $-55°C \le T_C \le +125°C$ unless otherwise specified | | Device type | Limits | | Unit |
|---|---|---|---|---|---|---|---|
| | | | | | Min | Max | |
| High level output voltage | $V_{OH}$ | $V_{CC}$ = 4.5 V<br>$V_{IH}$ = 2.0 V<br>$V_{IL}$ = 0.7 V | $I_{OH}$ = -.4 mA | 01, 02, 03,04,09 | 2.5 | | V |
| | | | $I_{OH}$ = -1.0 mA | 05,06,07, 08 | 2.4 | | V |
| Low level output voltage | $V_{OL}$ | $V_{CC}$ = 4.5 V | $I_{OL}$ = 4.0 mA | 01,02,03, 04,05,08, 09 | | 0.40 | V |
| | | | $I_{OL}$ = 12 mA | 06, 07, | | 0.40 | V |
| Input clamp voltage | $V_{IC}$ | $V_{CC}$ = 4.5 V, $I_{IN}$ = -18 mA, $T_C$ = +25°C | | All | | -1.5 | V |
| Low level input current at data inputs | $I_{IL1}$ | $V_{CC}$ = 5.5 V, $V_{IN}$ = 0.4 V | | 01, 05 | 0 | -.72 | mA |
| Low level input current at select or strobe | $I_{IL2}$ | | | 01, 05 | 0 | -.40 | mA |
| Low level input current at A, B, or C | $I_{IL3}$ | | | 01, 05 | 0 | -.40 | mA |
| Low level input current | $I_{IL1}$ | | | 02, 08 | 0 | -.40 | mA |
| | | | | 09 | -.03 | -.40 | |
| Low level input current at A, B, or C | $I_{IL1}$ | | | 03, 04 | 0 | -.44 | mA |
| Low level input current at select or strobe | $I_{IL2}$ | | | 03, 04 | 0 | -.88 | mA |
| Low level input current at A, B, or output control | $I_{IL1}$ | | | 06, 07 | 0 | -.44 | mA |
| Low level input current at select | $I_{IL2}$ | | | 06 | 0 | -.88 | mA |
| | | | | 07 | 0 | -.80 | mA |

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:05Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical performance characteristics - Continued.

| Test | Symbol | Conditions $-55°C \le T_C \le +125°C$ unless otherwise specified | Device type | Limits Min | Limits Max | Unit |
|---|---|---|---|---|---|---|
| High level input current | $I_{IH1}$ | $V_{CC}$ = 5.5 V, $V_{IN}$ = 2.7 V | 01,02,05, 08, 09 | | 20 | µA |
| | $I_{IH2}$ | $V_{CC}$ = 5.5 V, $V_{IN}$ = 7.0 V | 01,02,05, 08 | | 100 | µA |
| | $I_{IH2}$ | $V_{CC}$ = 5.5 V, $V_{IN}$ = 5.5 V | 09 | | 100 | µA |
| High level input current at A or B | $I_{IH1}$ | $V_{CC}$ = 5.5 V, $V_{IN}$ = 2.7 V | 03, 04 | | 20 | µA |
| | $I_{IH2}$ | $V_{CC}$ = 5.5 V, $V_{IN}$ = 7.0 V | | | 100 | µA |
| High level input current at strobe or select | $I_{IH3}$ | $V_{CC}$ = 5.5 V, $V_{IN}$ = 2.7 V | 03, 04 | | 40 | µA |
| | $I_{IH4}$ | $V_{CC}$ = 5.5 V, $V_{IN}$ = 7.0 V | | | 200 | µA |
| High level input current at A, B, or output control | $I_{IH1}$ | $V_{CC}$ = 5.5 V, $V_{IN}$ = 2.7 V | 06, 07 | | 20 | µA |
| | $I_{IH2}$ | $V_{CC}$ = 5.5 V, $V_{IN}$ = 7.0 V | | | 100 | µA |
| High level input current at select | $I_{IH3}$ | $V_{CC}$ = 5.5 V, $V_{IN}$ = 2.7 V | 06, 07 | | 40 | µA |
| | $I_{IH4}$ | $V_{CC}$ = 5.5 V, $V_{IN}$ = 7.0 V | | | 200 | µA |
| Off-state output current, high level voltage applied | $I_{OZH}$ | $V_{CC}$ = 5.5 V, $V_O$ = 2.7 V | 05,06,07, 08 | | 20 | µA |
| Off-state output current, low level voltage applied | $I_{OZL}$ | $V_{CC}$ = 5.5 V, $V_O$ = 0.4 V | 05,06,07, 08 | | -20 | µA |
| Short circuit output current | $I_{OS}$ | $V_{CC}$ = 5.5 V, $V_{OUT}$ = GND 1/ | 01,02,03, 04, 09 | -15 | -100 | mA |
| | | | 05,06,07, 08 | -15 | -130 | |
| Supply current | $I_{CC1}$ | $V_{CC}$ = 5.5 V, $V_{IN}$(data) = 5.5 V | 01 | | 10.0 | mA |
| | | $V_{IN}$(data) = GND | 02 | | 10.0 | mA |
| | | | 09 | | 21.0 | mA |

1/ Not more than one output should be shorted at one time.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:05Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical performance characteristics - Continued.

| Test | Symbol | Conditions $-55°C \le T_C \le +125°C$ unless otherwise specified | Device type | Limits Min | Limits Max | Unit |
|---|---|---|---|---|---|---|
| Supply current | $I_{CC1}$ | $V_{CC}$ = 5.5 V, $V_{IN}$(data) = 5.5 V | 03 | | 16.0 | mA |
| | $I_{CC1}$ | $V_{CC}$ = 5.5 V, $V_{IN}$(data) = 5.5 V | 04 | | 8.0 | mA |
| | $I_{CC1}$ | $V_{CC}$ = 5.5 V, $V_{IN}$(data) = 5.5 V<br>$V_{IN}$(strobe) = GND | 05 | | 10.0 | mA |
| | $I_{CC2}$ | $V_{CC}$ = 5.5 V, $V_{IN}$(data) = 5.5 V<br>$V_{IN}$(strobe) = 5.5 V | 05 | | 12.0 | mA |
| | $I_{CC1}$ | $V_{CC}$ = 5.5 V, $V_{IN}$(data) = 5.5 V<br>$V_{IN}$(output control) = GND | 06<br>07 | | 12.0<br>15.0 | mA<br>mA |
| | $I_{CC2}$ | $V_{CC}$ = 5.5 V, $V_{IN}$(data) = GND<br>$V_{IN}$(output control) = GND | 06<br>07 | | 18.0<br>9.0 | mA<br>mA |
| | $I_{CC3}$ | $V_{CC}$ = 5.5 V<br>$V_{IN}$(output control) = 5.5 V | 06, 07 | | 19.0 | mA |
| | $I_{CC1}$ | $V_{CC}$ = 5.5 V, $V_{IN}$(data) = GND<br>$V_{IN}$(output control) = GND | 08 | | 12.0 | mA |
| | $I_{CC2}$ | $V_{CC}$ = 5.5 V, $V_{IN}$(data) = GND<br>$V_{IN}$(output control) = 5.5 V | 08 | | 14.0 | mA |
| Propagation delay time low-to-high level output from data input to Y | $t_{PLH1}$ | $V_{CC}$ = 5.0 V, $C_L$ = 50 pF ±10%<br>$R_L$ = See figure 5. | 01<br>02<br>03<br>04<br>05<br>06, 07<br>09<br>08 | 3<br>3<br>3<br>3<br>3<br>3<br>3<br>3 | 56<br>30<br>29<br>26<br>50<br>35<br>43<br>45 | ns<br>ns<br>ns<br>ns<br>ns<br>ns<br>ns<br>ns |
| Propagation delay time high-to-low level output from data input to Y | $t_{PHL1}$ | | 01, 02<br>03<br>04<br>05<br>06, 07<br>09<br>08 | 3<br>3<br>3<br>3<br>3<br>3<br>3 | 47<br>29<br>26<br>50<br>35<br>48<br>38 | ns<br>ns<br>ns<br>ns<br>ns<br>ns<br>ns |

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:05Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical performance characteristics - Continued.

| Test | Symbol | Conditions $-55°C \le T_C \le +125°C$ unless otherwise specified | Device type | Limits | | Unit |
|---|---|---|---|---|---|---|
| | | | | Min | Max | |
| Propagation delay time low-to-high level output from data to W | $t_{PLH2}$ | $V_{CC}$ = 5.0 V, $C_L$ = 50 pF ±10% $R_L$ = See figure 5. | 01 | 3 | 39 | ns |
| | | | 05 | 3 | 30 | ns |
| Propagation delay time high-to-low level output from data to W | $t_{PHL2}$ | | 01 | 3 | 38 | ns |
| | | | 05 | 3 | 30 | ns |
| Propagation delay time low-to-high level output from strobe to Y | $t_{PLH3}$ | | 01 | 3 | 71 | ns |
| | | | 02 | 3 | 44 | ns |
| | | | 03 | 3 | 38 | ns |
| | | | 04 | 3 | 33 | ns |
| Propagation delay time high-to-low level output from strobe to Y | $t_{PHL3}$ | | 01, 02 | 3 | 56 | ns |
| | | | 03 | 3 | 39 | ns |
| | | | 04 | 3 | 35 | ns |
| Propagation delay time low-to-high level output from strobe to W | $t_{PLH4}$ | | 01 | 3 | 44 | ns |
| Propagation delay time high-to-low level output from strobe to W | $t_{PHL4}$ | | 01 | 3 | 53 | ns |
| Propagation delay time low-to-high level output from select to Y | $t_{PLH5}$ | | 01 | 3 | 72 | ns |
| | | | 02 | 3 | 51 | ns |
| | | | 03 | 3 | 42 | ns |
| | | | 04 | 3 | 38 | ns |
| | | | 05, 08 | 3 | 75 | ns |
| | | | 06, 07 | 3 | 39 | ns |
| Propagation delay time high-to-low level output from select to Y | $t_{PHL5}$ | | 01 | 3 | 53 | ns |
| | | | 02 | 3 | 65 | ns |
| | | | 03 | 3 | 48 | ns |
| | | | 04 | 3 | 44 | ns |
| | | | 05 | 3 | 75 | ns |
| | | | 06, 07 | 3 | 39 | ns |
| | | | 08 | 3 | 56 | ns |
| Propagation delay time low-to-high level output from select to W | $t_{PLH6}$ | | 01 | 3 | 42 | ns |
| | | | 05 | 3 | 57 | ns |
| Propagation delay time high-to-low level output from select to W | $t_{PHL6}$ | | 01 | 3 | 56 | ns |
| | | | 05 | 3 | 57 | ns |

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:05Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical performance characteristics - Continued.

| Test | Symbol | Conditions $-55°C \le T_C \le +125°C$ unless otherwise specified | Device type | Limits | | Unit |
|---|---|---|---|---|---|---|
| | | | | Min | Max | |
| Enable time to high level output from strobe to Y | $t_{PZH1}$ | $V_{CC}$ = 5.0 V, $C_L$ = 50 pF ±10%<br>$R_L$ = See figure 5. | 05 | 3 | 75 | ns |
| Enable time to high level output from strobe to W | $t_{PZH2}$ | | 05 | 3 | 48 | ns |
| Enable time to high level output from output control to Y | $t_{PZH3}$ | | 06, 07 | 3 | 53 | ns |
| | | | 08 | 3 | 69 | ns |
| Enable time to low level output from strobe to Y | $t_{PZL1}$ | | 05 | 3 | 68 | ns |
| Enable time to low level output from strobe to W | $t_{PZL2}$ | | 05 | 3 | 68 | ns |
| Enable time to low level output from output control to Y | $t_{PZL3}$ | | 06, 07 | 3 | 53 | ns |
| | | | 08 | 3 | 42 | ns |
| Disable time from high level output, from strobe to Y | $t_{PHZ1}$ | $V_{CC}$ = 5.0 V<br>$R_L$ = See figure 5.<br>$C_L$ = 15 pF minimum | 05 | 3 | 75 | ns |
| Disable time from high level output, from strobe to W | $t_{PHZ2}$ | | 05 | 3 | 90 | ns |
| Disable time from high level output, from output control to Y | $t_{PHZ3}$ | | 06, 07 | 3 | 53 | ns |
| | | | 08 | 3 | 69 | ns |
| Disable time from low level output, from strobe to Y | $t_{PLZ1}$ | | 05 | 3 | 45 | ns |
| Disable time from low level output, from strobe to W | $t_{PLZ2}$ | | 05 | 3 | 45 | ns |
| Disable time from low level output, from output control to Y | $t_{PLZ3}$ | | 06, 07<br>08 | 3<br>3 | 45<br>48 | ns<br>ns |

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:05Z
Check the source to verify that this is the current version before use.

TABLE II. Electrical test requirements.

| MIL-STD-883 test requirements | Subgroup (see table III) | |
|---|---|---|
| | Class S devices | Class B devices |
| Interim electrical parameters (pre burn-in) (method 5004) | 1 | 1 |
| Final electrical test parameters (method 5004) | 1,1/ 2, 3,7,9,10, 11 | 1,1/ 2, 3, 7, 9 |
| Group A test requirements (method 5005) | 1,2,3,7,8, 9, 10, 11 | 1,2,3,7,9, 10, 11 |
| Group B test requirements (method 5005) | 1,2,3,7,8, 9, 10, 11 | N/A |
| Group C end-point electrical parameters (method 5005) | N/A | 1, 2, 3 |
| Additional electrical subgroups for group C periodic inspections | N/A | None |
| Group D end-point electrical parameters (method 5005) | 1, 2, 3 | 1, 2, 3 |

1/ PDA applies to subgroup 1 (see 4.2c).

4.4 Quality conformance inspection. Quality conformance inspection shall be in accordance with MIL-M-38510. Inspections to be performed shall be those specified in method 5005 of MIL-STD-883 and herein for groups A, B, C, and D inspections (see 4.4.1 through 4.4.4).

4.4.1 Group A inspection. Group A inspection shall be in accordance with table I of method 5005 of MIL-STD-883 and as follows:

a. Tests shall be as specified in table II herein.

b. Subgroups 4, 5, and 6 of table I of method 5005 of MIL-STD-883 shall be omitted.

4.4.2 Group B inspection. Group B inspection shall be in accordance with table II of method 5005 of MIL-STD-883. Electrical parameters shall be as specified in table II herein.

4.4.3 Group C inspection. Group C inspection shall be in accordance with table III of method 5005 of MIL-STD-883 and as follows:

a. End-point electrical parameters shall be as specified in table II herein.

b. Steady-state life test (method 1005 of MIL-STD-883) conditions, or equivalent:

1. Test condition D or E, using the circuit shown on figure 4, or equivalent.

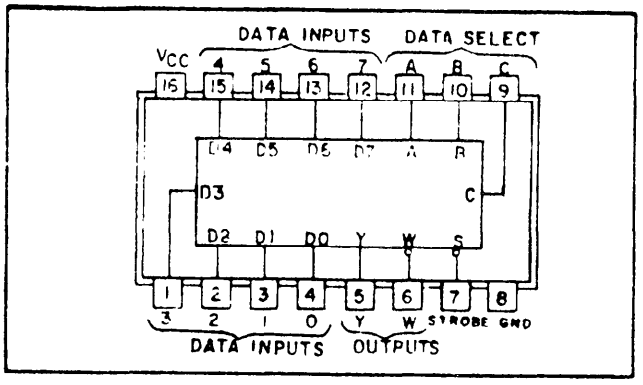
2. $T_A$ = 125°C minimum.

3. Test duration: 1,000 hours, except as permitted by appendix B of MIL-M-38510 and method 1005 of MIL-STD-883.

4.4.4 Group D inspection. Group D inspection shall be in accordance with table IV of method 5005 of MIL-STD-883. End-point electrical parameters shall be as specified in table II herein.


Source: https://assist.dla.mil -- Downloaded: 2026l0-21T14:05Z
Check the source to verify that this is the current version before use.

Device type 01





Cases E and F

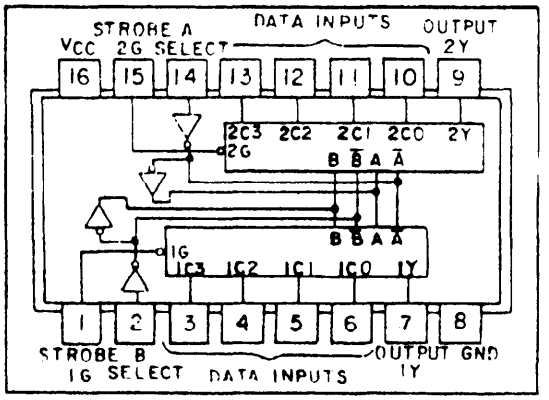Device type 02





Cases E and F

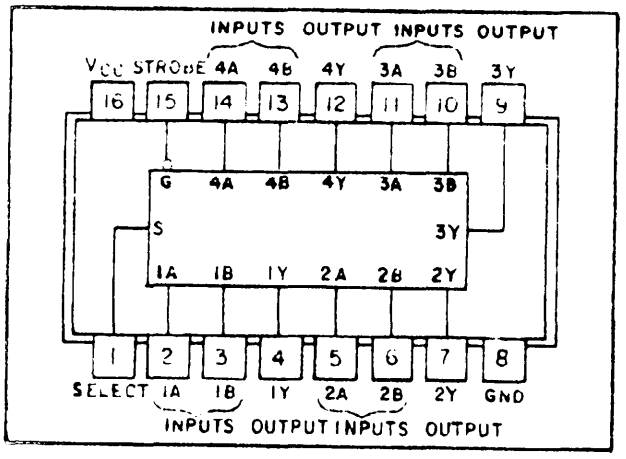Device type 03




Cases E and F

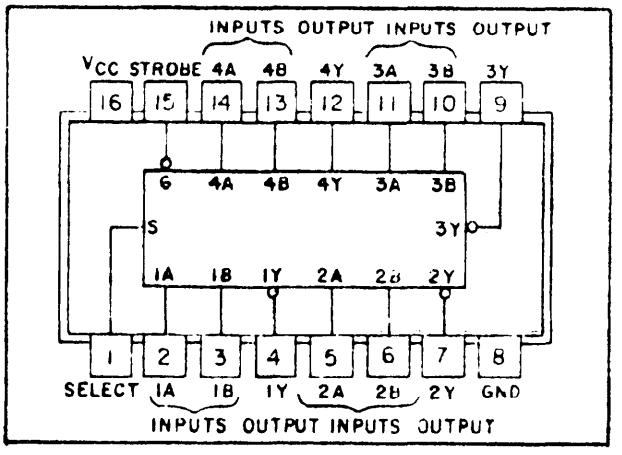Device type 04





Cases E and F

FIGURE 1. Terminal connections (top view).


Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:05Z
Check the source to verify that this is the current version before use.

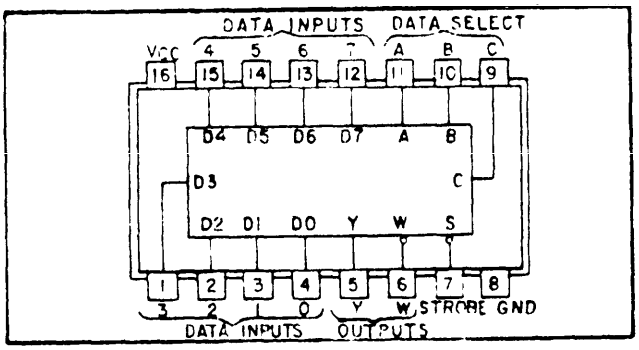Device type 05





Cases E and F

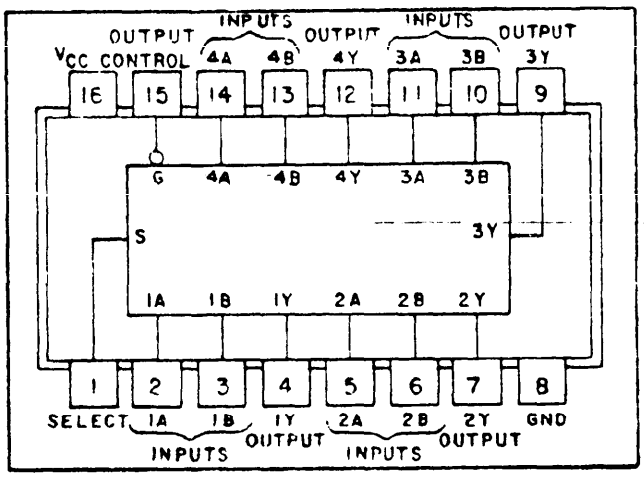Device types 06





Cases E and F

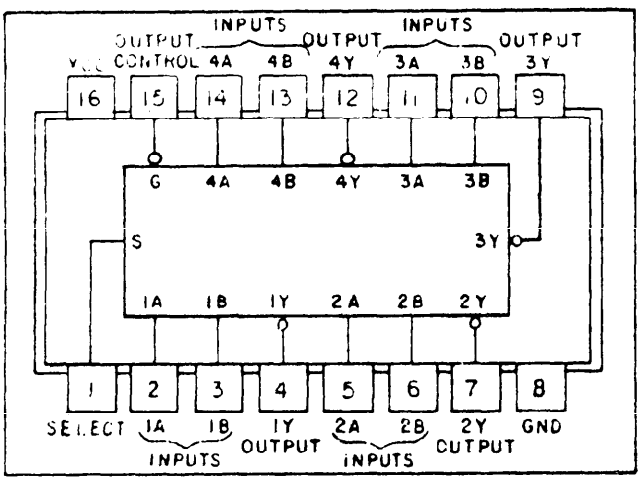Device types 07




Cases E and F

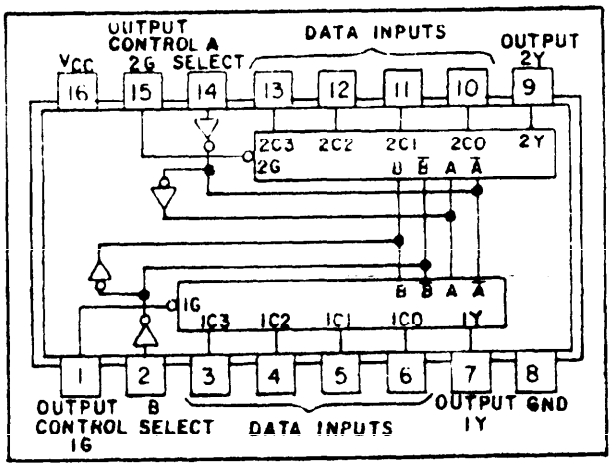Device type 08





Cases E and F

FIGURE 1. Terminal connections (top view) - Continued.

Source: https://assist.dla.mil -- Downloaded: 202640-21T14:05Z
Check the source to verify that this is the current version before use.

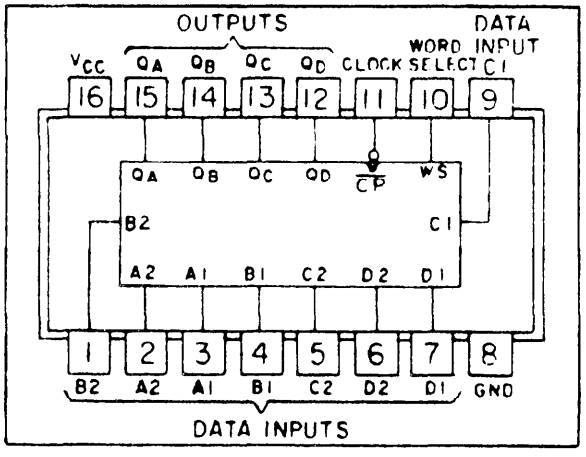Device type 09





Cases E and F

FIGURE 1. Terminal connections (top view) - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:05Z
Check the source to verify that this is the current version before use.

Device type 01

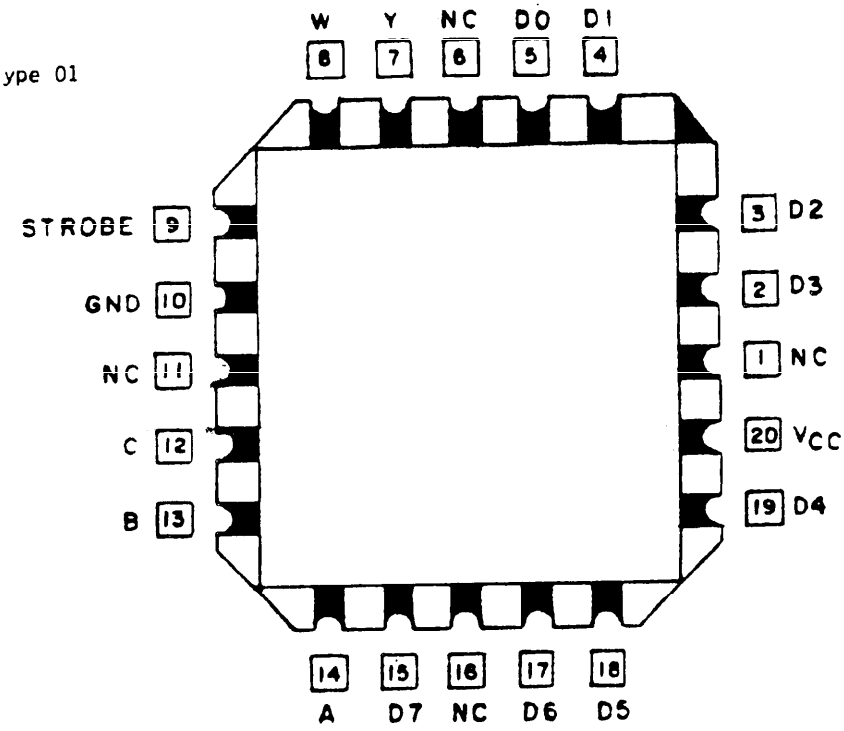
Case 2




(TOP VIEW)

Device type 02

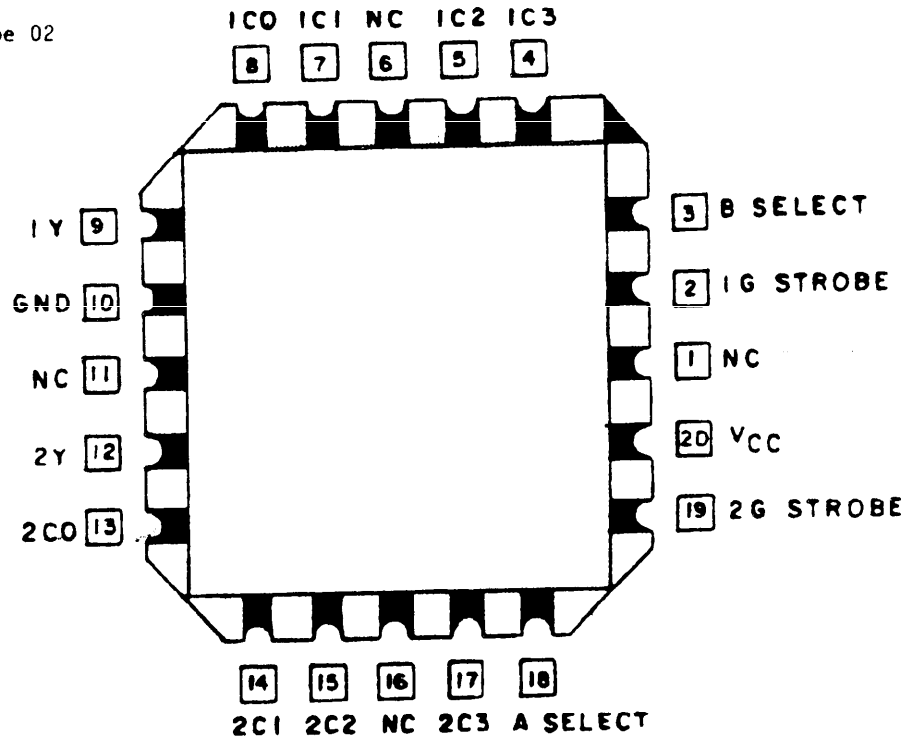Case 2





(TOP VIEW)

FIGURE 1. Terminal connections (top view) - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026l0-21T14:05Z
Check the source to verify that this is the currentversion before use.

Device types 03 and 04

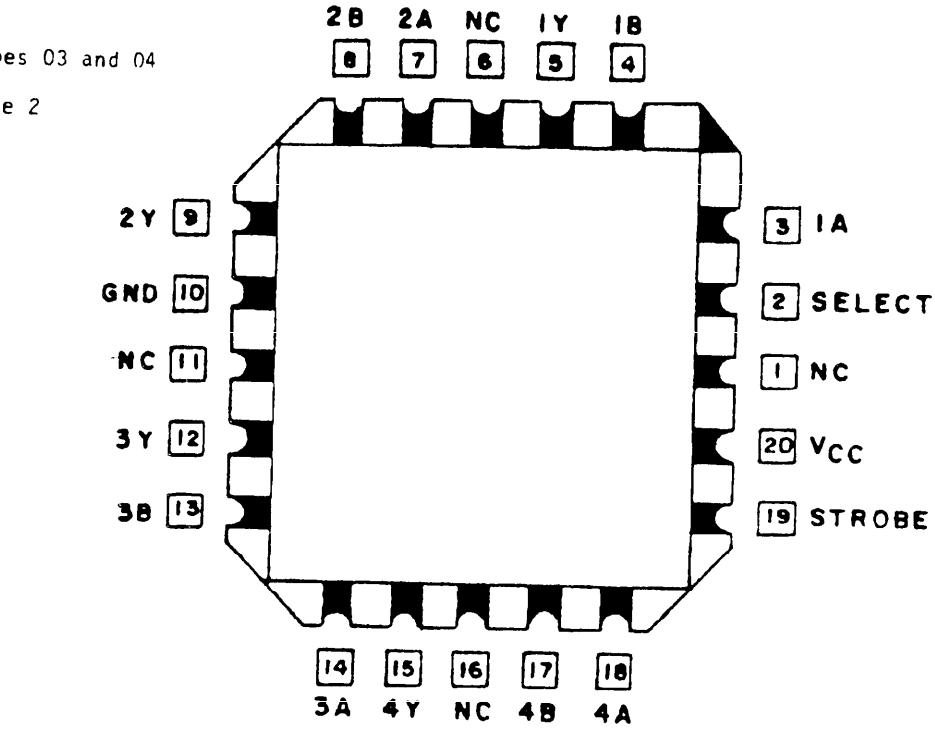
Case 2




(TOP VIEW)

Device type 05

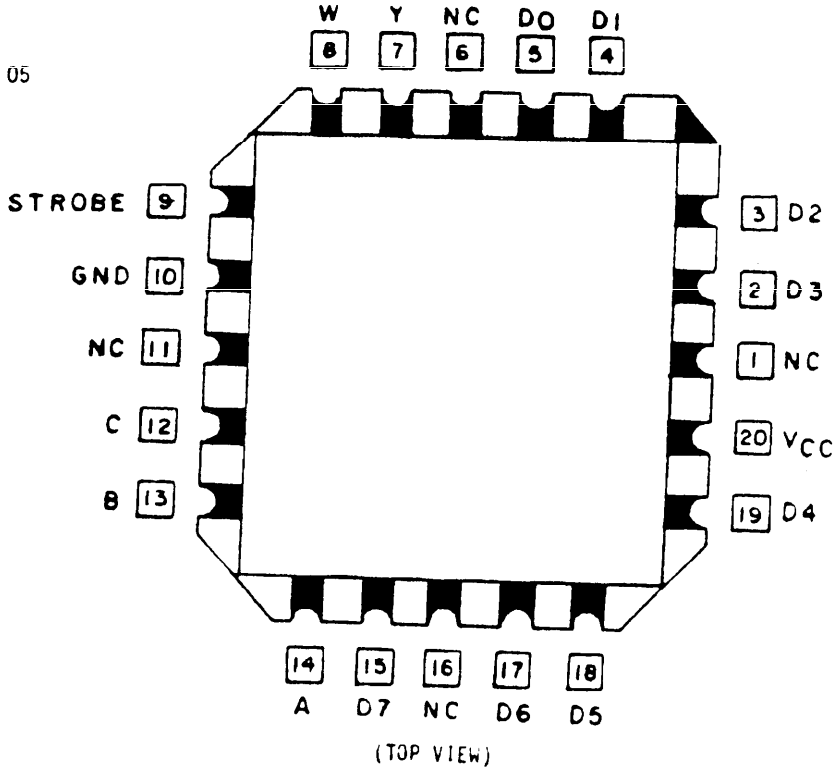Case 2





(TOP VIEW)

FIGURE 1. Terminal connections (top view) - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:05Z
Check the source to verify that this is the current version before use.

Device types 06, 07

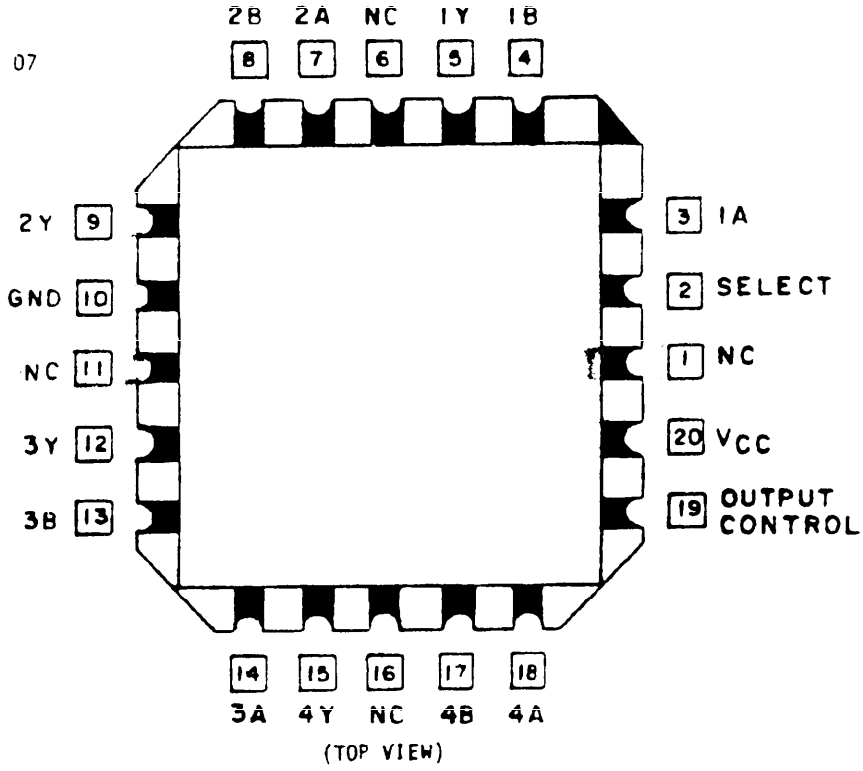Case 2




Device type 08

Case 2


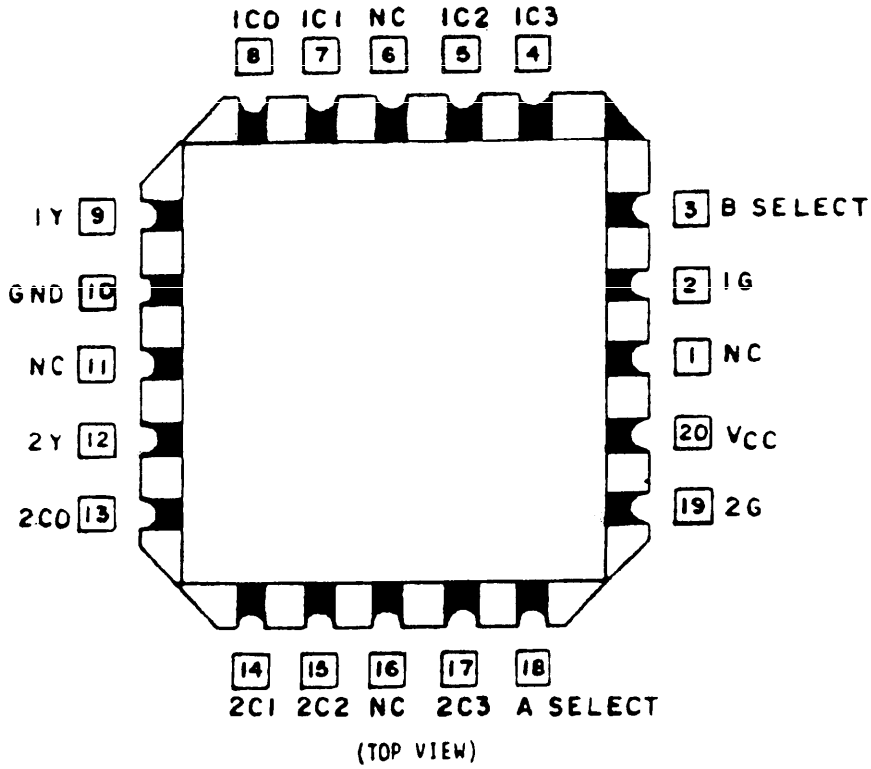



FIGURE 1. Terminal connections (top view) - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:05Z
Check the source to verify that this is the current version before use.

Device type 09

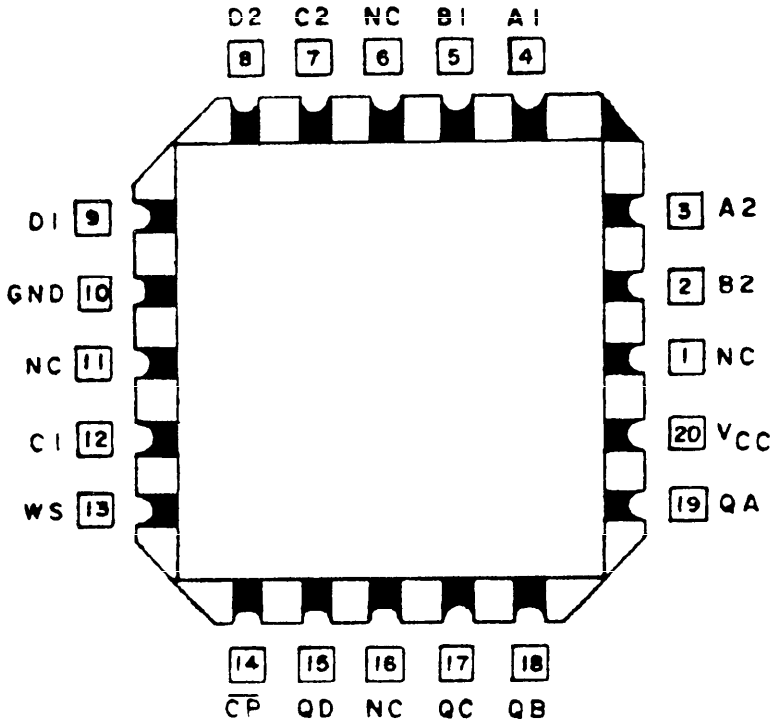Case 2





(TOP VIEW)


FIGURE 1. Terminal connections (top view) - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:05Z
Check the source to verify that this is the current version before use.

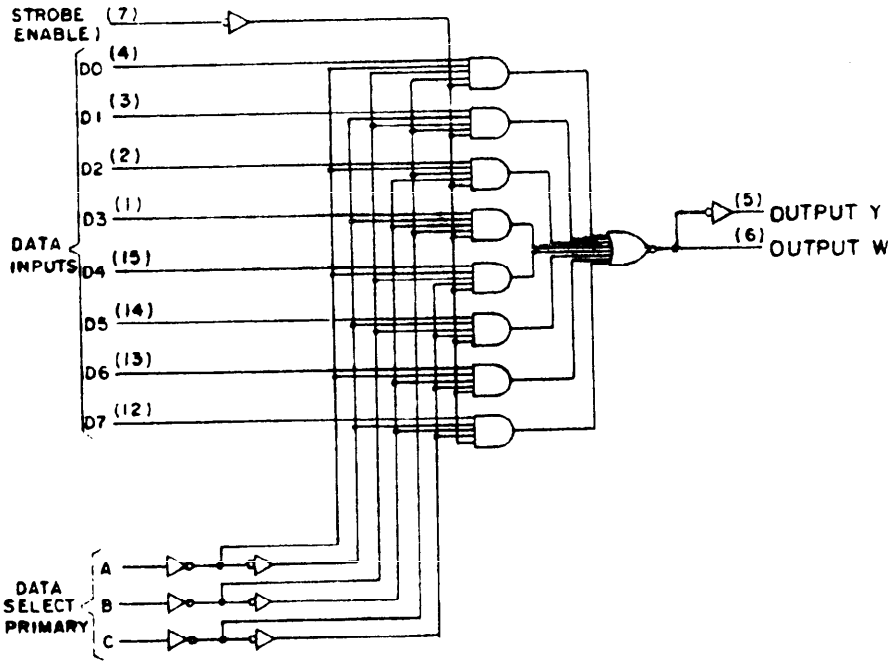DEVICE TYPE 01




DEVICE TYPE 02

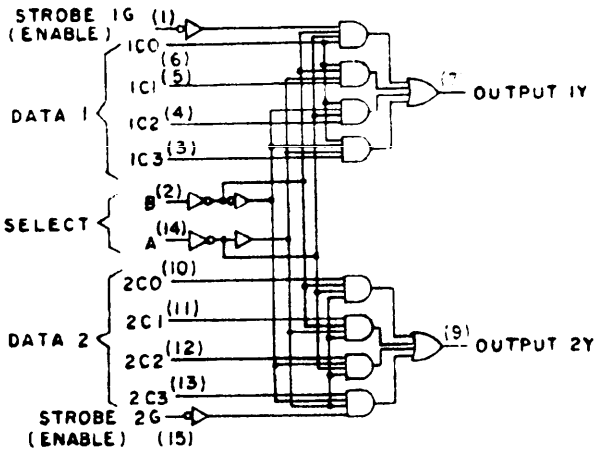


DEVICE TYPE 03


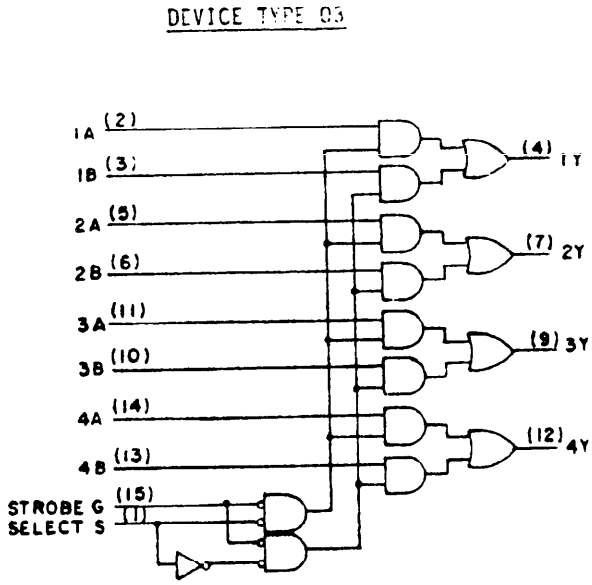



FIGURE 2. Logic diagrams.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:05Z
Check the source to verify that this is the current version before use.

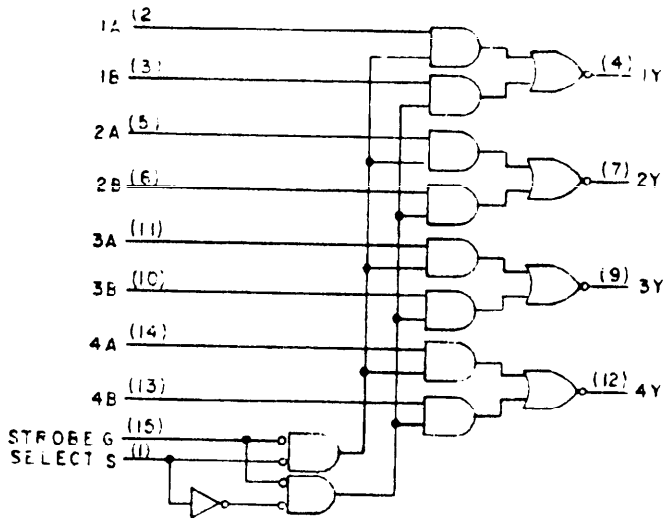Device type 04




Device type 05


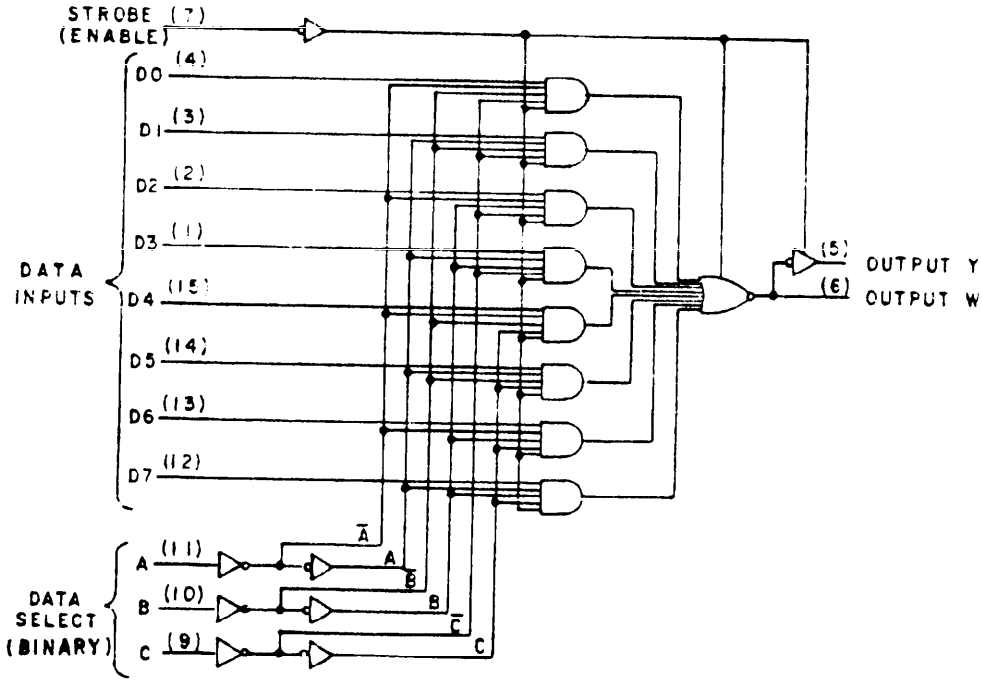




FIGURE 2. Logic diagrams - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:05Z
Check the source to verify that this is the current version before use.

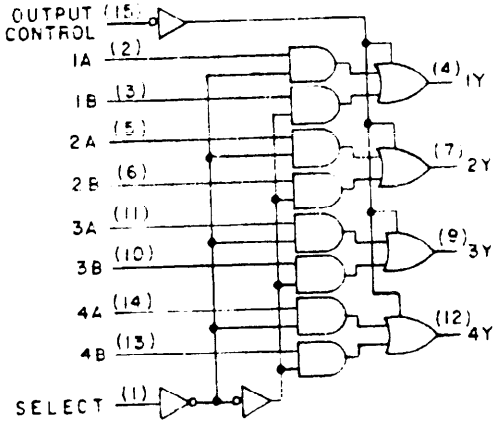Device type 06




Device type 07

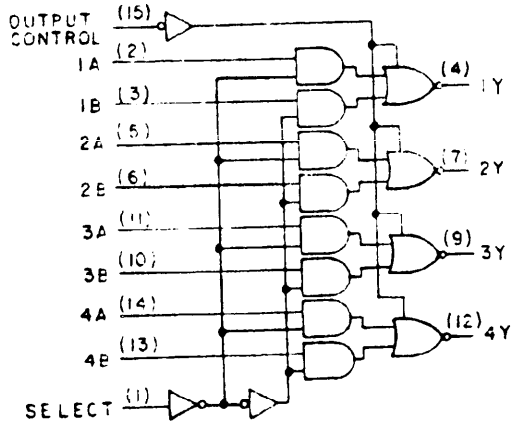


Device type 08

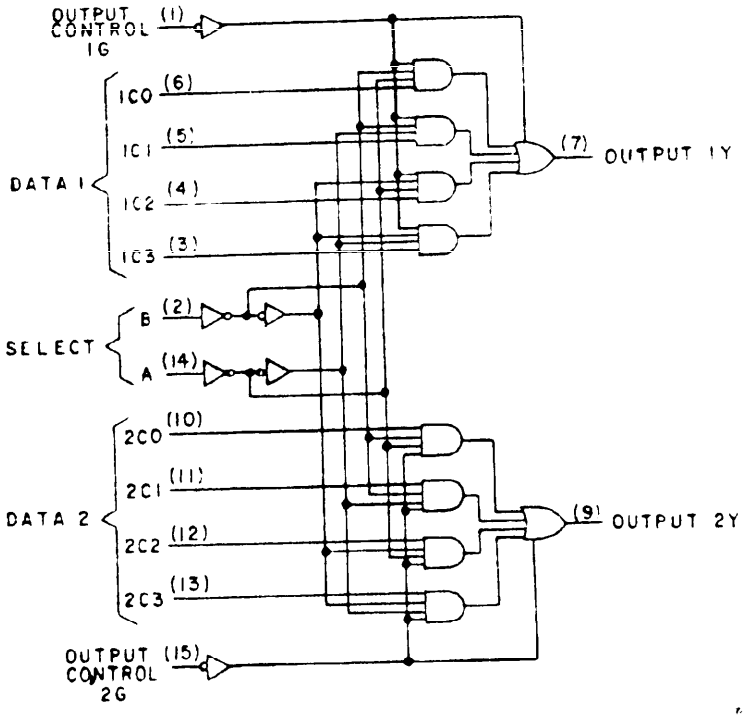



FIGURE 2. Logic diagrams - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:05Z
Check the source to verify that this is the current version before use.

Device type 09

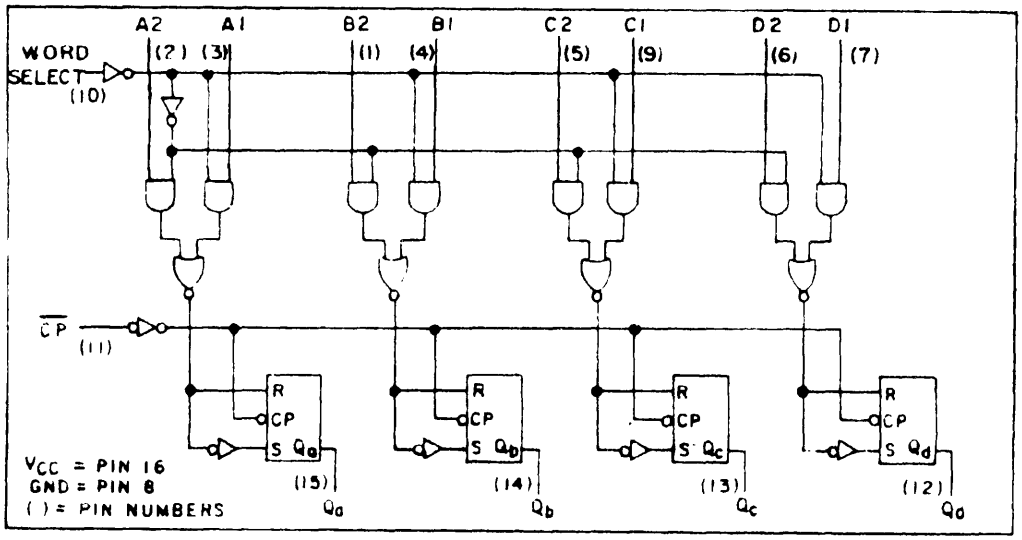



FIGURE 2. Logic diagrams - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:05Z
Check the source to verify that this is the current version before use.

Device type 01

| INPUTS | | | | OUTPUTS | |
|---|---|---|---|---|---|
| SELECT | | | STROBE | | |
| C | B | A | S | Y | W |
| X | X | X | H | L | H |
| L | L | L | L | D0 | $\overline{D0}$ |
| L | L | H | L | D1 | $\overline{D1}$ |
| L | H | L | L | D2 | $\overline{D2}$ |
| L | H | H | L | D3 | $\overline{D3}$ |
| H | L | L | L | D4 | $\overline{D4}$ |
| H | L | H | L | D5 | $\overline{D5}$ |
| H | H | L | L | D6 | $\overline{D6}$ |
| H | H | H | L | D7 | $\overline{D7}$ |

H = high level, L = low level, X = irrelevant
D0, D1 ...D7 = the level of the D respective input.

Device type 02

| SELECT INPUTS | | DATA INPUTS | | | | STROBE | OUTPUT |
|---|---|---|---|---|---|---|---|
| B | A | C0 | C1 | C2 | C3 | G | Y |
| X | X | X | X | X | X | H | L |
| L | L | L | X | X | X | L | L |
| L | L | H | X | X | X | L | H |
| L | H | X | L | X | X | L | L |
| L | H | X | H | X | X | L | H |
| H | L | X | X | L | X | L | L |
| H | L | X | X | H | X | L | H |
| H | H | X | X | X | L | L | L |
| H | H | X | X | X | H | L | H |

Select inputs A and B are common to both sections.
H = high level, L = low level, X = irrelevant.

Device types 03 and 04

| INPUTS | | | | OUTPUT Y | |
|---|---|---|---|---|---|
| STROBE | SELECT | A | B | TYPE 03 | TYPE 04 |
| H | X | X | X | L | H |
| L | L | L | X | L | H |
| L | L | H | X | H | L |
| L | H | X | L | L | H |
| L | H | X | H | H | L |

H = high level, L = low level, X = irrelevant.

FIGURE 3. Truth tables.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:05Z
Check the source to verify that this is the current version before use.

Device type 05

| INPUTS | | | | OUTPUTS | |
|---|---|---|---|---|---|
| SELECT | | | STROBE | | |
| C | B | A | S | Y | W |
| X | X | X | H | Z | Z |
| L | L | L | L | D0 | $\overline{D0}$ |
| L | L | H | L | D1 | $\overline{D1}$ |
| L | H | L | L | D2 | $\overline{D2}$ |
| L | H | H | L | D3 | $\overline{D3}$ |
| H | L | L | L | D4 | $\overline{D4}$ |
| H | L | H | L | D5 | $\overline{D5}$ |
| H | H | L | L | D6 | $\overline{D6}$ |
| H | H | H | L | D7 | $\overline{D7}$ |

H = high logic level, L = low logic level.
X = irrelevant, Z = high impedance (off).
D0, D1 ... D7 = the level of the respective D input.

Device types 06, 07

| INPUTS | | | | OUTPUT Y | |
|---|---|---|---|---|---|
| OUTPUT CONTROL | SELECT | A | B | TYPE 06 | TYPE 07 |
| H | X | X | X | Z | Z |
| L | L | L | X | L | H |
| L | L | H | X | H | L |
| L | H | X | L | L | H |
| L | H | X | H | H | L |

H = high level, L = low level, X = irrelevant,
Z = high impedance (off).

Device type 08

| SELECT INPUTS | | DATA INPUTS | | | | OUTPUT CONTROL | OUTPUT |
|---|---|---|---|---|---|---|---|
| B | A | C0 | C1 | C2 | C3 | G | Y |
| X | X | X | X | X | X | H | Z |
| L | L | L | X | X | X | L | L |
| L | L | H | X | X | X | L | H |
| L | H | X | L | X | X | L | L |
| L | H | X | H | X | X | L | H |
| H | L | X | X | L | X | L | L |
| H | L | X | X | H | X | L | H |
| H | H | X | X | X | L | L | L |
| H | H | X | X | X | H | L | H |

Address inputs A and B are common to both sections.
H = high level, L = low level, X = irrelevant,
Z = high impedance (off).

FIGURE 3. Truth tables - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:05Z
Check the source to verify that this is the current version before use.

Device type 09


| Inputs | | Outputs | | | |
|---|---|---|---|---|---|
| Word select | Clock | $Q_A$ | $Q_B$ | $Q_C$ | $Q_D$ |
| L | + | a1 | b1 | c1 | d1 |
| H | + | a2 | b2 | c2 | d2 |
| X | H | $Q_{AO}$ | $Q_{BO}$ | $Q_{CO}$ | $Q_{DO}$ |

H = high level (steady state)
L = low level (steady state)
X = irrelevant (any input, including transitions)
+ = transition from high to low level
a1, a2, etc = the level of steady state input at A1, A2, etc.
$Q_{AO}$, $Q_{BO}$, etc. = the level of $Q_A$, $Q_B$ etc, entered on the most-recent + transition of the clock input.

FIGURE 3. Truth tables - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:05Z
Check the source to verify that this is the current version before use.

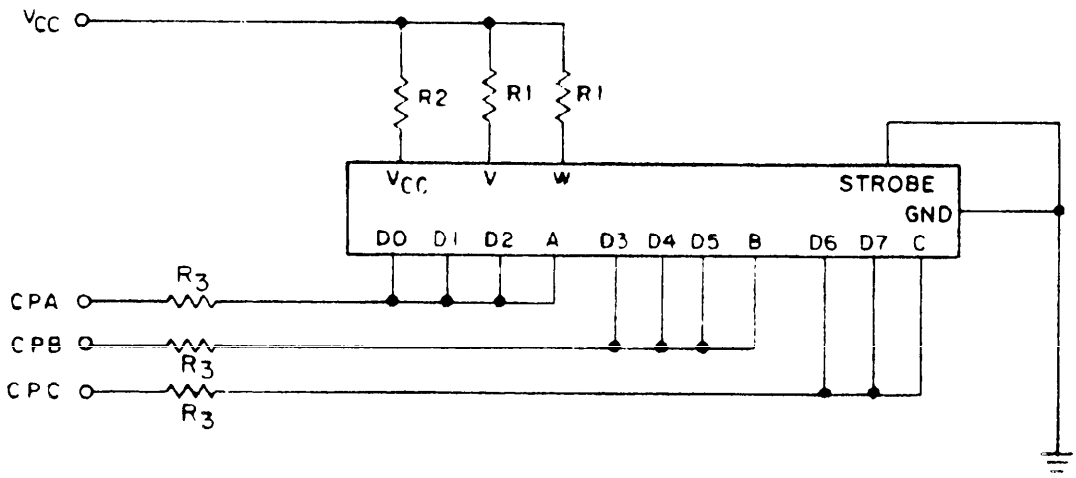Device types 01 and 05





NOTES:
1. CP A = 100 kHz ±50% square wave; duty cycle = 50 ±15% $V_{IL}$ = -0.5 V minimum to +0.7 V maximum; $V_{IH}$ = 2.0 V minimum to 5.5 V maximum.
   CP B = Same as CP A, synchronized with CP A, except 50 kHz ±50% square wave.
   CP C = Same as CP A, except 180° out of phase.
2. R1 = 1 kΩ ±5%; R2 = 10Ω ±5%, $R_3$ = 27Ω ±5%.
3. $V_{CC}$ shall be high enough to insure that 5.0 V minimum to present at $V_{CC}$ device terminal.

FIGURE 4. Burn-in and life test circuit.

Source: https://assist.dla.mil -- Downloaded: 202610-21T14:05Z
Check the source to verify that this is the current version before use.

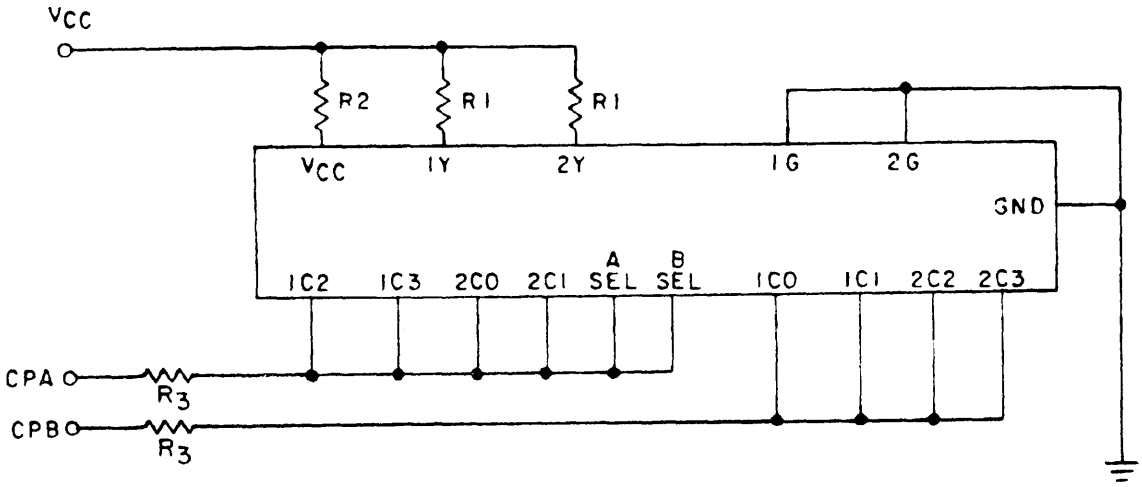Device types 02 and 08





NOTES:
1. CP A = 100 kHz ±50% square wave; duty cycle = 50 ±15%; $V_{IL}$ = -0.5 V minimum to +0.7 V maximum; $V_{IH}$ = 2.0 V minimum to 5.5 V maximum.
   CP B = Same as CP A, synchronized with CP A, except 50 kHz ±50% square wave.
2. R1 = 1 kΩ ±5%; R2 = 10Ω ±5%, $R_3$ = 27Ω ±5%.
3. $V_{CC}$ shall be high enough to insure that 5.0 V minimum is present at $V_{CC}$ device terminal.

FIGURE 4. Burn-in and life test circuit - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:05Z
Check the source to verify that this is the current version before use.

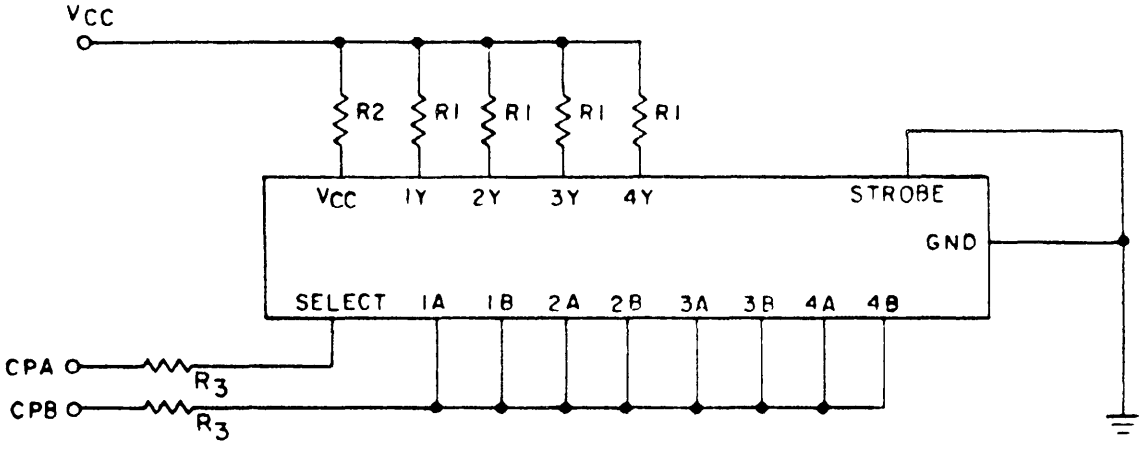Device types 03, 04, 06, 07





NOTES:
1. CP A = 100 kHz ±50% square wave; duty cycle = 50 ±15%; $V_{IL}$ = -0.5 V minimum to +0.7 V maximum; $V_{IH}$ = 2.0 V minimum to 5.5 V maximum.
   CP B = Same as CP A, synchronized with CP A, except 50 kHz ±50% square wave.
2. R1 = 1 kΩ ±5% for device types 03 and 04.
   R1 = 470Ω ±5% for device types 06 and 07.
   R2 = 10Ω ±5%, $R_3$ = 27Ω ±5%.
3. $V_{CC}$ shall be high enough to insure that 5.0 V minimum is present at $V_{CC}$ device terminal.

FIGURE 4. Burn-in and life test circuit - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:05Z
Check the source to verify that this is the current version before use.

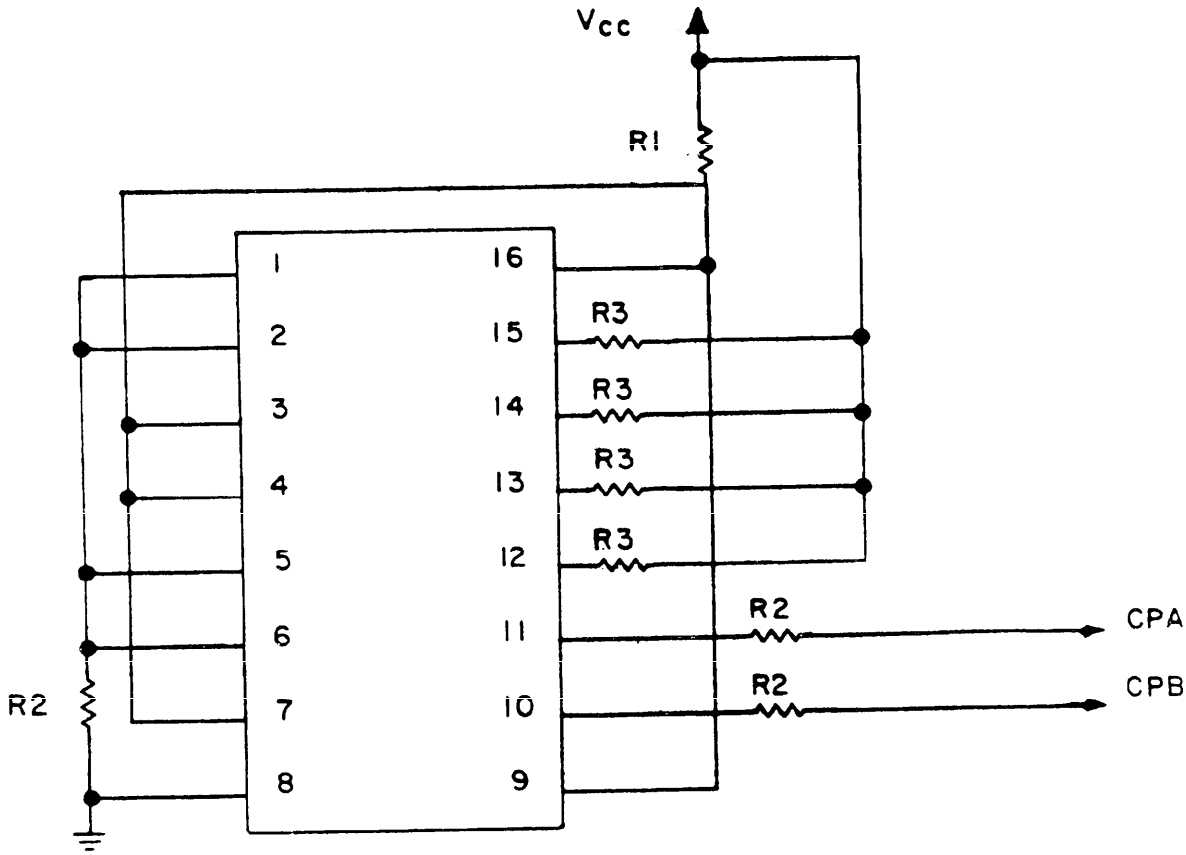
Device type 09





NOTES:
1. CPA = 0 to 3.0 V minimum at device terminals, 100 kHz, 50% duty cycle minimum.
2. CPB = 1/2 CPA frequency, synchronized with CPA.
3. $R_1$ = 4.7Ω, $R_2$ = 27Ω, $R_3$ = 1 kΩ.
4. $V_{CC}$ shall be high enough to insure that 5.0 V minimum is present at $V_{CC}$ device terminal.

FIGURE 4. Burn-in and life test circuit - Continued.

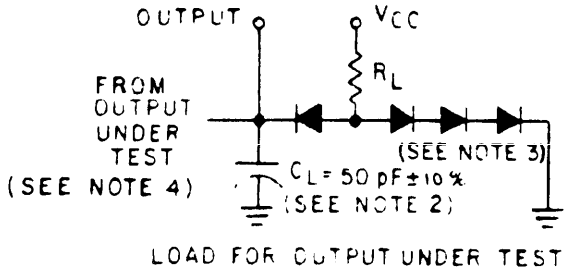Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:05Z
Check the source to verify that this is the current version before use.





LOAD FOR OUTPUT UNDER TEST

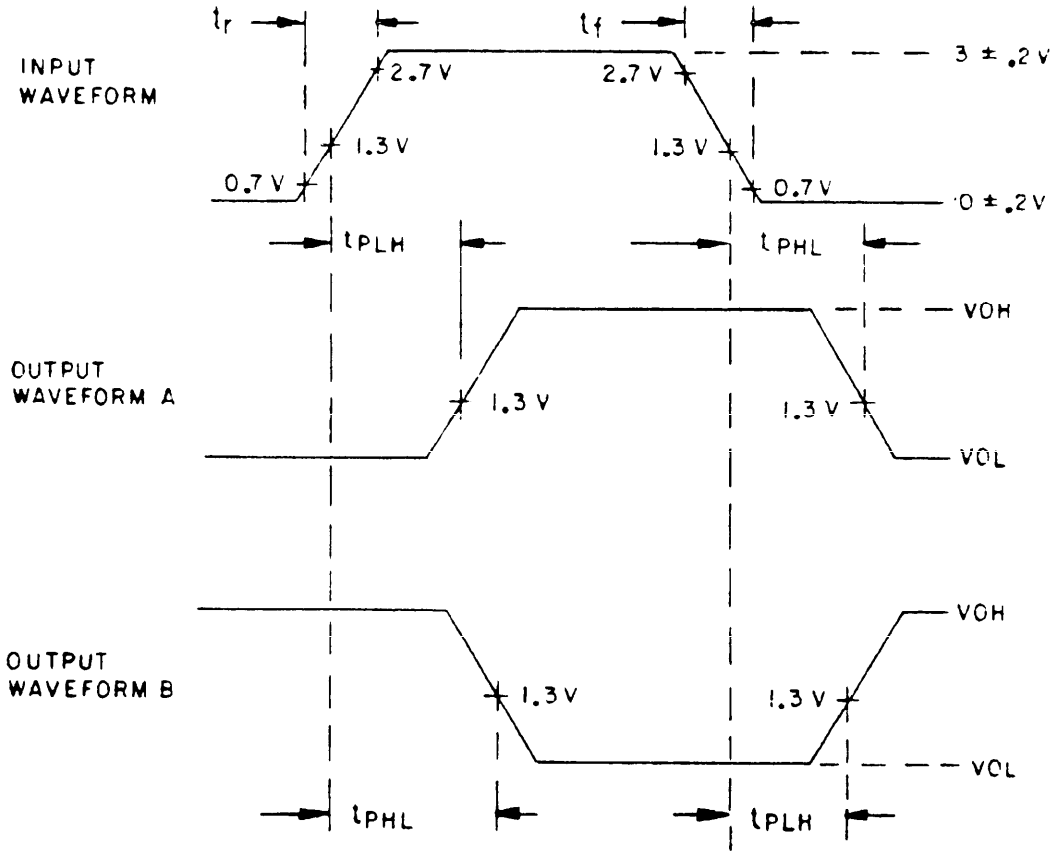



NOTES:
1. Input pulse characteristics: PRR $\leq$ 1.0 MHz, $t_r \leq$ 15 ns, and $t_f \leq$ 6 ns.
2. $C_L$ = 50 pF ±10% including probe and jig capacitance.
3. $R_L$ = 2.0 kΩ ±5%. All diodes are 1N3064 or 1N916.
4. Load circuit on a given output is only required where the specific test in table III indicates "OUT" on that output.

FIGURE 5. Switching test for device types 01, 02, 03 and 04.

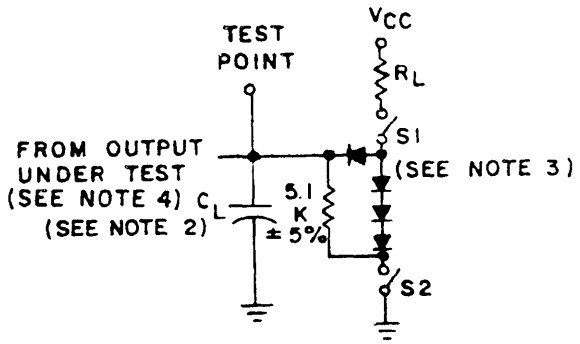Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:05Z
Check the source to verify that this is the current version before use.





Load circuit for three state outputs.

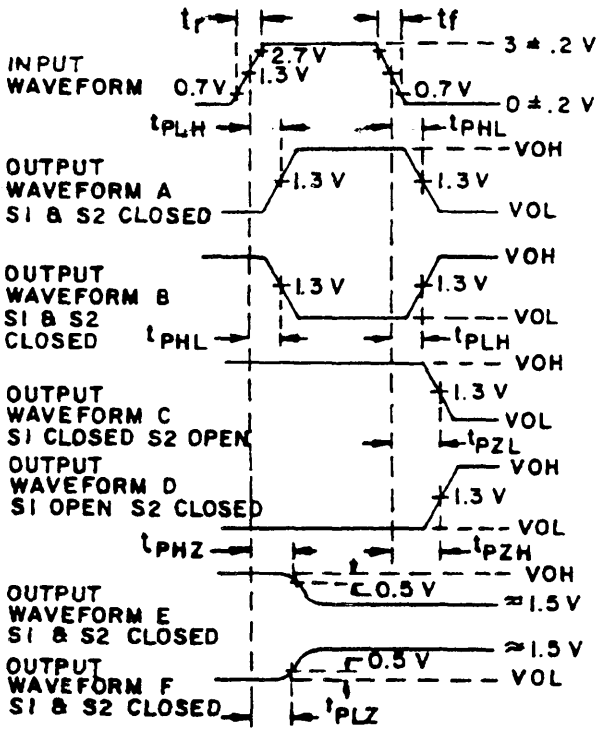



NOTES:
1. Input pulse characteristics: PRR ≤ 1.0 MHz, $t_r$ ≤ 15 ns, and $t_f$ ≤ 6 ns.
2. $C_L$ = 50 pF ±10% for $t_{PLH}$, $t_{PHL}$, $t_{PZL}$, and $t_{PZH}$ tests; $C_L$ = 15 pF minimum for $t_{PHZ}$ and $t_{PLZ}$ tests. $C_L$ includes probe and jig capacitance.
3. All diodes are 1N3064 or 1N916. $R_L$ = 2 kΩ ±5% for device types 05 and 08, and $R_L$ = 680Ω ±5% for device types 06 and 07.
4. Load circuits on a given output are only required where the specific test given in table III indicates "OUT" on that output.

FIGURE 5. Switching test for device types 05, 06, 07, 08 - Continued.

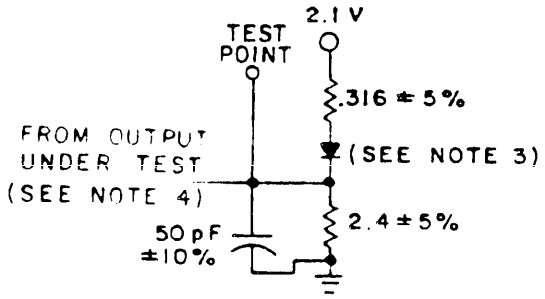Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:05Z
Check the source to verify that this is the current version before use.





Device types 05 and 08

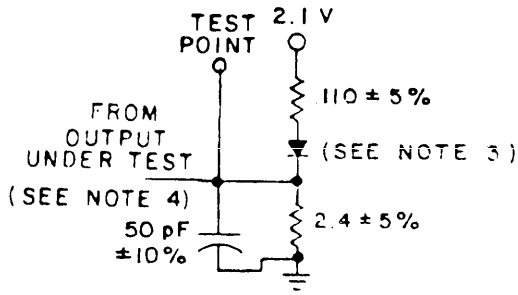


Device types 06 and 07

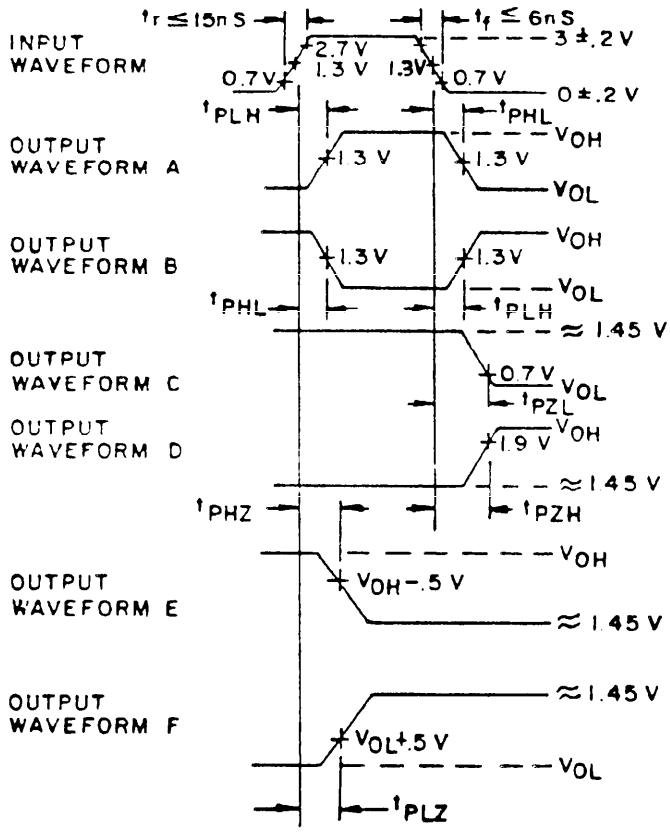Optional load circuits for three state outputs.






Waveforms for optional load circuits.

all resistance values in kilohms.

FIGURE 5. Switching test for device types 05, 06, 07, 08 - Continued.

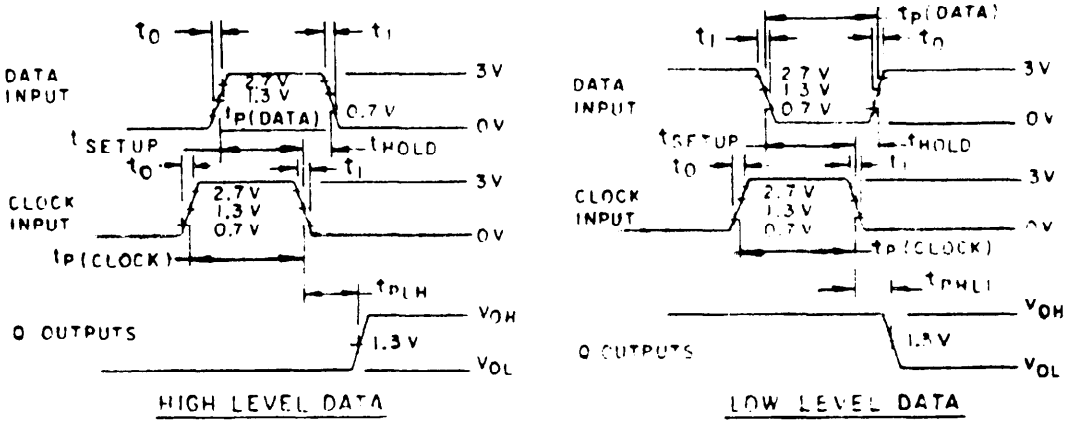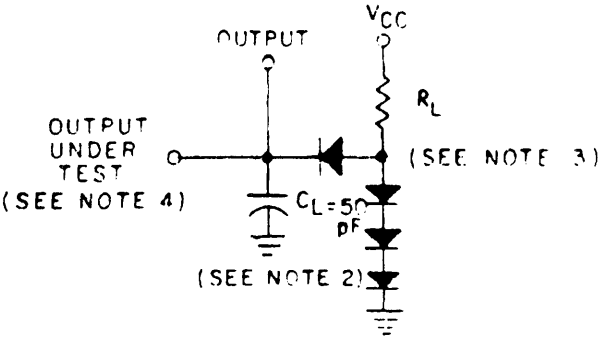Source: https://assist.dla.mil -- Downloaded: 2026l0-21T14:05Z
Check the source to verify that this is the currentversion before use.




NOTES:
1. Input pulse characteristics: PRR $\leq$ 1.0 MHz, to $\leq$ 15 ns, $t_1 \leq$ 6 ns, $t_p$ (data) = 20 ns, $t_p$ (clock) = 20 ns, $t_{SETUP}$ = 15 ns and $t_{HOLD}$ = 5 ns.
2. $C_L$ = 50 PF ±10% including probe and jig capacitance.
3. $R_L$ = 2 kΩ ±5%, and all diodes are 1N3064 or equivalents.
4. Load circuit on a given output is only required where the specific test in table III indicates "OUT" on that output.

FIGURE 5. Switching test circuit and waveforms for device type 09- Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:05Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 01.
Terminal conditions (pins not designated may be high ≥ 2.0 V; low ≤ 0.7 V; or open).

| Subgroup | Symbol | MIL-STD-883 method | Cases E, F / Case 2 / Test no. | 1 / 2 / D3 | 2 / 3 / D2 | 3 / 4 / D1 | 4 / 5 / D0 | 5 / 7 / Y | 6 / 8 / W | 7 / 9 / S | 8 / 10 / GND | 9 / 12 / C | 10 / 13 / B | 11 / 14 / A | 12 / 15 / D7 | 13 / 17 / D6 | 14 / 18 / D5 | 15 / 19 / D4 | 16 / 20 / $V_{CC}$ | Measured terminal | Limits Min | Limits Max | Unit |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| $T_C$ = [1] +25°C | $V_{OH}$ | 3006 | 1 | 2.0 V | 2.0 V | 2.0 V | 2.0 V | | -.4 mA | 2.0 V | GND | 2.0 V | 2.0 V | 2.0 V | 2.0 V | 2.0 V | 2.0 V | 2.0 V | 4.5 V | W | 2.5 | | V |
| | | 3006 | 2 | " | " | " | " | -.4 mA | | 0.7 V | " | 0.7 V | 0.7 V | 0.7 V | " | " | " | " | " | Y | 2.5 | | " |
| | $V_{OL}$ | 3007 | 3 | " | " | " | " | | 4.0 mA | 0.7 V | " | 0.7 V | 0.7 V | 0.7 V | " | " | " | " | " | W | | 0.4 | " |
| | | 3007 | 4 | " | " | " | " | 4.0 mA | | 2.0 V | " | 2.0 V | 2.0 V | 2.0 V | " | " | " | " | " | Y | | 0.4 | " |
| | $V_{IC}$ | | 5 | -18 mA | | | | | | | " | | | | | | | | " | D3 | | -1.5 | " |
| | | | 6 | | -18 mA | | | | | | " | | | | | | | | " | D2 | | " | " |
| | | | 7 | | | -18 mA | | | | | " | | | | | | | | " | D1 | | " | " |
| | | | 8 | | | | -18 mA | | | | " | | | | | | | | " | D0 | | " | " |
| | | | 9 | | | | | | | -18 mA | " | | | | | | | | " | S | | " | " |
| | | | 10 | | | | | | | | " | -18 mA | | | | | | | " | C | | " | " |
| | | | 11 | | | | | | | | " | | -18 mA | | | | | | " | B | | " | " |
| | | | 12 | | | | | | | | " | | | -18 mA | | | | | " | A | | " | " |
| | | | 13 | | | | | | | | " | | | | -18 mA | | | | " | D7 | | " | " |
| | | | 14 | | | | | | | | " | | | | | -18 mA | | | " | D6 | | " | " |
| | | | 15 | | | | | | | | " | | | | | | -18 mA | | " | D5 | | " | " |
| | | | 16 | | | | | | | | " | | | | | | | -18 mA | " | D4 | | " | " |
| | $I_{IL1}$ | 3009 | 17 | 0.4 V | 5.5 V | 5.5 V | 5.5 V | | | GND | " | GND | 5.5 V | 5.5 V | 5.5 V | 5.5 V | 5.5 V | 5.5 V | 5.5 V | D3 | 1/ | 1/ | mA |
| | | " | 18 | 5.5 V | 0.4 V | 5.5 V | " | | | " | " | " | 5.5 V | GND | " | " | " | " | " | D2 | " | " | " |
| | | " | 19 | " | 5.5 V | 0.4 V | " | | | " | " | GND | GND | 5.5 V | " | " | " | " | " | D1 | " | " | " |
| | | " | 20 | " | " | 5.5 V | 0.4 V | | | " | " | GND | GND | GND | " | " | " | " | " | D0 | " | " | " |
| | | " | 21 | " | " | " | 5.5 V | | | " | " | 5.5 V | 5.5 V | 5.5 V | 0.4 V | " | " | " | " | D7 | " | " | " |
| | | " | 22 | " | " | " | " | | | " | " | " | 5.5 V | GND | 5.5 V | 0.4 V | " | " | " | D6 | " | " | " |
| | | " | 23 | " | " | " | " | | | " | " | " | GND | 5.5 V | " | 5.5 V | 0.4 V | " | " | D5 | " | " | " |
| | | " | 24 | " | " | " | " | | | " | " | " | GND | GND | " | 5.5 V | 5.5 V | 0.4 V | " | D4 | " | " | " |
| | $I_{IL2}$ | " | 25 | | | | | | | 0.4 V | " | | | | | | | | " | S | " | " | " |
| | $I_{IL3}$ | " | 26 | | | | | | | | " | 0.4 V | | | | | | | " | C | " | " | " |
| | | " | 27 | | | | | | | | " | | 0.4 V | | | | | | " | B | " | " | " |
| | | " | 28 | | | | | | | | " | | | 0.4 V | | | | | " | A | " | " | " |
| | $I_{IH1}$ | 3010 | 29 | 2.7 V | GND | GND | GND | | | 5.5 V | " | 5.5 V | GND | GND | GND | GND | GND | GND | " | D3 | | 20 | µA |
| | | " | 30 | GND | 2.7 V | GND | " | | | " | " | " | GND | 5.5 V | " | " | " | " | " | D2 | | " | " |
| | | " | 31 | " | GND | 2.7 V | " | | | " | " | " | 5.5 V | GND | " | " | " | " | " | D1 | | " | " |
| | | " | 32 | " | GND | GND | 2.7 V | | | " | " | " | 5.5 V | 5.5 V | " | " | " | " | " | D0 | | " | " |
| | | " | 33 | | | | | | | 2.7 V | " | | | | | | | | " | S | | " | " |
| | | " | 34 | | | | | | | | " | 2.7 V | | | | | | | " | C | | " | " |
| | | " | 35 | | | | | | | | " | | 2.7 V | | | | | | " | B | | " | " |
| | | " | 36 | | | | | | | | " | | | 2.7 V | | | | | " | A | | " | " |
| | | " | 37 | GND | GND | GND | GND | | | 5.5 V | " | GND | GND | GND | 2.7 V | GND | GND | GND | " | D7 | | " | " |
| | | " | 38 | " | " | " | " | | | " | " | " | GND | 5.5 V | GND | 2.7 V | GND | " | " | D6 | | " | " |
| | | " | 39 | " | " | " | " | | | " | " | " | 5.5 V | GND | " | GND | 2.7 V | " | " | D5 | | " | " |
| | | " | 40 | " | " | " | " | | | " | " | " | 5.5 V | 5.5 V | " | GND | GND | 2.7 V | " | D4 | | " | " |

See footnotes at end of device type 01.





Source: https://assist.dla.mil -- Downloaded: 2026-02-21T14:05Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 01 - Continued.
Terminal conditions (pins not designated may be high ≥ 2.0 V; low ≤ 0.7 V; or open).

| Subgroup | Symbol | MIL-STD-883 method | Cases E, F Case 2 Test no. | 1 2 D3 | 2 3 D2 | 3 4 D1 | 4 5 D0 | 5 7 Y | 6 8 W | 7 9 S | 8 10 GND | 9 12 C | 10 13 B | 11 14 A | 12 15 D7 | 13 17 D6 | 14 18 D5 | 15 19 D4 | 16 20 $V_{CC}$ | Measured terminal | Limits Min | Limits Max | Unit |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1 $T_C$ = +25°C | $I_{IH2}$ | 3010 | 41 | 7.0 V | GND | GND | GND | | | 5.5 V | GND | 5.5 V | GND | GND | GND | GND | GND | GND | 5.5 V | D3 | | 100 | µA |
| | | " | 42 | GND | 7.0 V | GND | " | | | " | " | " | GND | 5.5 V | " | " | " | " | " | D2 | | " | " |
| | | " | 43 | " | GND | 7.0 V | " | | | " | " | " | 5.5 V | GND | " | " | " | " | " | D1 | | " | " |
| | | " | 44 | " | GND | GND | 7.0 V | | | " | " | " | 5.5 V | 5.5 V | " | " | " | " | " | D0 | | " | " |
| | | " | 45 | | | | | | | 7.0 V | " | | | | | | | | " | S | | " | " |
| | | " | 46 | | | | | | | | " | 7.0 V | | | | | | | " | C | | " | " |
| | | " | 47 | | | | | | | | " | | 7.0 V | | | | | | " | B | | " | " |
| | | " | 48 | | | | | | | | " | | | 7.0 V | | | | | " | A | | " | " |
| | | " | 49 | GND | GND | GND | GND | | | 5.5 V | " | GND | GND | GND | 7.0 V | GND | GND | GND | " | D7 | | " | " |
| | | " | 50 | " | " | " | " | | | " | " | " | GND | 5.5 V | GND | 7.0 V | GND | " | " | D6 | | " | " |
| | | " | 51 | " | " | " | " | | | " | " | " | 5.5 V | GND | " | GND | 7.0 V | 7.0 V | " | D5 | | " | " |
| | | " | 52 | " | " | " | " | | | " | " | " | 5.5 V | 5.5 V | " | " | GND | | " | D4 | | " | " |
| | $I_{OS}$ | 3011 | 53 | " | " | " | 5.5 V | GND | GND | GND | " | " | GND | GND | " | " | " | GND | " | Y | -15 | -100 | mA |
| | | 3011 | 54 | " | " | " | GND | | | 5.5 V | " | " | GND | GND | " | " | " | GND | " | W | -15 | -100 | " |
| | $I_{CC1}$ | 3005 | 55 | 5.5 V | 5.5 V | 5.5 V | 5.5 V | | | 5.5 V | " | 5.5 V | 5.5 V | 5.5 V | 5.5 V | 5.5 V | 5.5 V | 5.5 V | " | $V_{CC}$ | --- | 10 | " |
| 2 | Same tests, terminal conditions, and limits as subgroup 1, except $T_C$ = +125°C and $V_{IC}$ tests are omitted. | | | | | | | | | | | | | | | | | | | | | | |
| 3 | Same tests, terminal conditions, and limits as subgroup 1, except $T_C$ = -55°C and $V_{IC}$ tests are omitted. | | | | | | | | | | | | | | | | | | | | | | |
| 7 $T_C$ = +25°C | Func-tional tests | 3014 | 56 | B | B | B | B | L | H | A | GND | B | B | B | B | B | B | B | 5.0 V | All outputs | 2/ | | |
| | | " | 57 | A | A | A | A | " | " | " | " | B | B | B | A | A | A | A | " | " | | | |
| | | " | 58 | A | A | A | A | " | " | " | " | A | A | A | " | A | A | A | " | " | | | |
| | | " | 59 | B | B | B | B | " | " | " | " | " | " | " | " | B | B | B | " | " | | | |
| | | " | 60 | " | " | " | " | " | " | " | " | " | " | " | " | A | B | B | " | " | | | |
| | | " | 61 | " | " | " | " | H | L | B | " | " | " | " | " | " | A | " | " | " | | | |
| | | " | 62 | " | " | " | " | L | H | A | " | " | " | B | " | " | " | A | " | " | | | |
| | | " | 63 | " | " | " | " | H | L | B | " | " | " | B | " | " | " | " | " | " | | | |
| | | " | 64 | " | " | " | " | L | H | A | " | " | " | A | " | " | " | " | " | " | | | |
| | | " | 65 | " | " | " | " | H | L | B | " | " | " | " | " | " | " | " | " | " | | | |
| | | " | 66 | " | " | " | " | L | H | A | " | " | " | B | " | " | " | " | " | " | | | |
| | | " | 67 | " | " | " | " | H | L | B | " | " | " | " | " | " | " | " | " | " | | | |
| | | " | 68 | A | " | " | " | L | H | A | " | " | " | A | " | " | " | " | " | " | | | |
| | | " | 69 | " | " | " | " | H | L | B | " | " | " | " | " | " | " | " | " | " | | | |
| | | " | 70 | " | A | " | " | L | H | A | " | " | " | B | " | " | " | " | " | " | | | |
| | | " | 71 | " | " | " | " | H | L | B | " | " | " | " | " | " | " | " | " | " | | | |
| | | " | 72 | " | " | A | " | L | H | A | " | " | " | B | " | " | " | " | " | " | | | |
| | | " | 73 | " | " | " | " | H | L | B | " | " | " | " | " | " | " | " | " | " | | | |
| | | " | 74 | " | " | " | A | L | H | A | " | " | " | A | " | " | " | " | " | " | | | |
| | | " | 75 | " | " | " | A | H | L | B | " | " | " | B | " | " | " | " | " | " | | | |
| 8 | Repeat subgroup 7 tests at $T_C$ = +125°C and -55°C. | | | | | | | | | | | | | | | | | | | | | | |
| 9 $T_C$ = +25°C | $t_{PLH1}$ | 3003 (Fig. 5) | 76 | | | | IN | OUT | | GND | GND | GND | GND | GND | | | | | 5.0 V | D0 to Y | 3 | 37 | ns |
| | | " | 77 | | | IN | " | " | | " | " | " | GND | 5.0 V | | | | | " | D1 to Y | " | " | " |
| | | " | 78 | | IN | | " | " | | " | " | " | 5.0 V | GND | | | | | " | D2 to Y | " | " | " |
| | | " | 79 | IN | | | " | " | | " | " | " | 5.0 V | 5.0 V | | | | | " | D3 to Y | " | " | " |
| | | " | 80 | | | | " | " | | " | " | 5.0 V | GND | GND | | | IN | IN | " | D4 to Y | " | " | " |
| | | " | 81 | | | | " | " | | " | " | " | GND | 5.0 V | | | | | " | D5 to Y | " | " | " |
| | | " | 82 | | | | " | " | | " | " | " | 5.0 V | GND | | IN | | | " | D6 to Y | " | " | " |
| | | " | 83 | | | | " | " | | " | " | " | 5.0 V | 5.0 V | IN | | | | " | D7 to Y | " | " | " |

See footnotes at end of device type 01.





Source: https://assist.dla.mil -- Downloaded: 2026-02-21T14:05Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 01 - Continued.
Terminal conditions (pins not designated may be high ≥ 2.0 V; low ≤ 0.7 V; or open).

| Subgroup | Symbol | MIL-STD-883 method | Cases E, F / Case 2 / Test no. | 1 / 2 / D3 | 2 / 3 / D2 | 3 / 4 / D1 | 4 / 5 / D0 | 5 / 7 / Y | 6 / 8 / W | 7 / 9 / S | 8 / 10 / GND | 9 / 12 / C | 10 / 13 / B | 11 / 14 / A | 12 / 15 / D7 | 13 / 17 / D6 | 14 / 18 / D5 | 15 / 19 / D4 | 16 / 20 / $V_{CC}$ | Measured terminal | Limits Min | Limits Max | Unit |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 9<br>$T_C$ = +25°C | $t_{PHL1}$ | 3003 (Fig. 5) | 84 | | | | IN | OUT | | GND | GND | GND | GND | GND | | | | | 5.0 V | D0 to Y | 3 | 31 | ns |
| | | " | 85 | | | IN | " | " | | " | " | " | GND | 5.0 V | | | | | " | D1 to Y | " | " | " |
| | | " | 86 | | IN | | " | " | | " | " | " | 5.0 V | GND | | | | | " | D2 to Y | " | " | " |
| | | " | 87 | IN | | | " | " | | " | " | " | 5.0 V | 5.0 V | | | | | " | D3 to Y | " | " | " |
| | | " | 88 | | | | " | " | | " | " | 5.0 V | GND | GND | | | IN | | " | D4 to Y | " | " | " |
| | | " | 89 | | | | " | " | | " | " | " | GND | 5.0 V | | IN | | | " | D5 to Y | " | " | " |
| | | " | 90 | | | | " | " | | " | " | " | 5.0 V | GND | | IN | | | " | D6 to Y | " | " | " |
| | | " | 91 | | | | " | " | | " | " | " | 5.0 V | 5.0 V | IN | | | | " | D7 to Y | " | " | " |
| | $t_{PLH2}$ | " | 92 | | | | IN | | OUT | " | " | GND | GND | GND | | | | | " | D0 to W | " | 26 | " |
| | | " | 93 | | | IN | | | " | " | " | " | GND | 5.0 V | | | | | " | D1 to W | " | " | " |
| | | " | 94 | | IN | | | | " | " | " | " | 5.0 V | GND | | | | | " | D2 to W | " | " | " |
| | | " | 95 | IN | | | | | " | " | " | " | 5.0 V | 5.0 V | | | | | " | D3 to W | " | " | " |
| | | " | 96 | | | | | | " | " | " | 5.0 V | GND | GND | | | IN | | " | D4 to W | " | " | " |
| | | " | 97 | | | | | | " | " | " | " | GND | 5.0 V | | IN | | | " | D5 to W | " | " | " |
| | | " | 98 | | | | | | " | " | " | " | 5.0 V | GND | | IN | | | " | D6 to W | " | " | " |
| | | " | 99 | | | | | | " | " | " | " | 5.0 V | 5.0 V | IN | | | | " | D7 to W | " | " | " |
| | $t_{PHL2}$ | " | 100 | | | | IN | | " | " | " | GND | GND | GND | | | | | " | D0 to W | " | 25 | " |
| | | " | 101 | | | IN | | | " | " | " | " | GND | 5.0 V | | | | | " | D1 to W | " | " | " |
| | | " | 102 | | IN | | | | " | " | " | " | 5.0 V | GND | | | | | " | D2 to W | " | " | " |
| | | " | 103 | IN | | | | | " | " | " | " | 5.0 V | 5.0 V | | | | | " | D3 to W | " | " | " |
| | | " | 104 | | | | | | " | " | " | 5.0 V | GND | GND | | | IN | | " | D4 to W | " | " | " |
| | | " | 105 | | | | | | " | " | " | " | GND | 5.0 V | | IN | | | " | D5 to W | " | " | " |
| | | " | 106 | | | | | | " | " | " | " | 5.0 V | GND | | IN | | | " | D6 to W | " | " | " |
| | | " | 107 | | | | | | " | " | " | " | 5.0 V | 5.0 V | IN | | | | " | D7 to W | " | " | " |
| | $t_{PLH3}$ | " | 108 | 5.0 V | 5.0 V | 5.0 V | 5.0 V | OUT | | IN | " | GND | GND | GND | 5.0 V | 5.0 V | 5.0 V | 5.0 V | " | S to Y | " | 47 | " |
| | $t_{PHL3}$ | " | 109 | 5.0 V | 5.0 V | 5.0 V | 5.0 V | OUT | | " | " | GND | GND | GND | " | 5.0 V | 5.0 V | 5.0 V | " | S to Y | " | 37 | " |
| | $t_{PLH4}$ | " | 110 | GND | GND | GND | GND | | OUT | " | " | 5.0 V | 5.0 V | 5.0 V | " | GND | GND | GND | " | S to W | " | 29 | " |
| | $t_{PHL4}$ | " | 111 | GND | GND | GND | " | | OUT | " | " | 5.0 V | 5.0 V | 5.0 V | " | GND | GND | GND | " | S to W | " | 35 | " |
| | $t_{PLH5}$ | " | 112 | | | 5.0 V | " | OUT | | GND | " | GND | GND | IN | | | | | " | A to Y | " | 48 | " |
| | | " | 113 | | 5.0 V | | " | " | | " | " | GND | IN | GND | | | | | " | B to Y | " | " | " |
| | | " | 114 | | | | " | " | | " | " | IN | GND | GND | | | | 5.0 V | " | C to Y | " | " | " |
| | $t_{PHL5}$ | " | 115 | | | GND | 5.0 V | " | | " | " | GND | GND | IN | | | | | " | A to Y | " | 35 | " |
| | | " | 116 | | GND | | " | " | | " | " | GND | IN | GND | | | | | " | B to Y | " | " | " |
| | | " | 117 | | | | " | " | | " | " | IN | GND | GND | | | | GND | " | C to Y | " | " | " |
| | $t_{PLH6}$ | " | 118 | | | GND | " | | OUT | " | " | GND | GND | IN | | | | | " | A to W | " | 28 | " |
| | | " | 119 | | GND | | " | | " | " | " | GND | IN | GND | | | | | " | B to W | " | " | " |
| | | " | 120 | | | | " | | " | " | " | IN | GND | GND | | | | GND | " | C to W | " | " | " |
| | $t_{PHL6}$ | " | 121 | | | 5.0 V | GND | | " | " | " | GND | GND | IN | | | | | " | A to W | " | 37 | " |
| | | " | 122 | | 5.0 V | | " | | " | " | " | GND | IN | GND | | | | | " | B to W | " | " | " |
| | | " | 123 | | | | " | | " | " | " | IN | GND | GND | | | | 5.0 V | " | C to W | " | " | " |

See footnotes at end of device type 01.



Source: https://assist.dla.mil -- Downloaded: 2026-02-21T14:05Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 01 - Continued.
Terminal conditions (pins not designated may be high ≥ 2.0 V; low ≤ 0.7 V; or open).

| Subgroup | Symbol | MIL-STD-883 method | Cases E, F | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | Measured terminal | Limits | | Unit |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | Case 2 | 2 | 3 | 4 | 5 | 7 | 8 | 9 | 10 | 12 | 13 | 14 | 15 | 17 | 18 | 19 | 20 | | Min | Max | |
| | | | Test no. | D3 | D2 | D1 | D0 | Y | W | S | GND | C | B | A | D7 | D6 | D5 | D4 | $V_{CC}$ | | | | |
| 10<br>$T_C$ = +125°C | Same tests and terminal conditions as subgroup 9, except $T_C$ = +125°C and, for following limits:<br><br>$t_{PLH1}$ = 3 to 56 ns; $t_{PHL1}$ = 3 to 47 ns; $t_{PLH2}$ = 3 to 39 ns; $t_{PHL2}$ = 3 to 38 ns;<br>$t_{PLH3}$ = 3 to 71 ns; $t_{PHL3}$ = 3 to 56 ns; $t_{PLH4}$ = 3 to 44 ns; $t_{PHL4}$ = 3 to 53 ns;<br>$t_{PLH5}$ = 3 to 72 ns; $t_{PHL5}$ = 3 to 53 ns; $t_{PLH6}$ = 3 to 42 ns; $t_{PHL6}$ = 3 to 56 ns. | | | | | | | | | | | | | | | | | | | | | | |
| 11 | Same tests, terminal conditions, and limits as subgroup 10, except $T_C$ = -55°C. | | | | | | | | | | | | | | | | | | | | | | |

1/ $I_{IL}$ limits shall be as follows:

| Test | Min/Max limits (mA) for circuit | | | | | | |
|---|---|---|---|---|---|---|---|
| | A | B | C | D | E | F | G |
| $I_{IL1}$ | -.16/-.40 | -.12/-.36 | -.16/-.40 | -.03/-.30 | -.16/-.40 | -.105/-.345 | 0/-.15 |
| $I_{IL2}$ & $I_{IL3}$ | -.12/-.36 | -.12/-.36 | -.16/-.40 | -.30/-.30 | -.16/-.40<br>-.10/-.34 | -.16/-.40 | 0/-.15 |

2/ Inputs: A ≥ 2.5 V minimum, B ≤ 0.4 V maximum.
Outputs: H ≥ 1.5 V, L ≤ 1.5 V.



Source: https://assist.dla.mil -- Downloaded: 2026-02-21T14:05Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 02.
Terminal conditions (pins not designated may be high ≥ 2.0 V; low ≤ 0.7 V; or open).

| Subgroup | Symbol | MIL-STD-883 method | Cases E, F / Case 2 / Test no. | 1 / 2 / 1G | 2 / 3 / B | 3 / 4 / 1C3 | 4 / 5 / 1C2 | 5 / 7 / 1C1 | 6 / 8 / 1C0 | 7 / 9 / 1Y | 8 / 10 / GND | 9 / 12 / 2Y | 10 / 13 / 2C0 | 11 / 14 / 2C1 | 12 / 15 / 2C2 | 13 / 17 / 2C3 | 14 / 18 / A | 15 / 19 / 2G | 16 / 20 / $V_{CC}$ | Measured terminal | Limits Min | Limits Max | Unit |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1<br>$T_C$ = +25°C | $V_{OH}$ | 3006<br>3006 | 1<br>2 | 0.7 V | 0.7 V<br>0.7 V | | | | 2.0 V | -.4 mA | GND<br>" | -.4 mA | 2.0 V | | | | 0.7 V<br>0.7 V | 0.7 V | 4.5 V<br>" | 1Y<br>2Y | 2.5<br>2.5 | | V<br>" |
| | $V_{OL}$ | 3007<br>3007 | 3<br>4 | 2.0 V | | | | | | 4 mA | "<br>" | 4 mA | | | | | | 2.0 V | " | 1Y<br>2Y | | 0.4<br>0.4 | "<br>" |
| | $V_{IC}$ | | 5<br>6<br>7<br>8<br>9<br>10<br>11<br>12<br>13<br>14<br>15<br>16 | -18 mA | -18 mA | -18 mA | -18 mA | -18 mA | -18 mA | | "<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>" | | -18 mA | -18 mA | -18 mA | -18 mA | -18 mA | -18 mA | " | 1G<br>B<br>1C3<br>1C2<br>1C1<br>1C0<br>2C0<br>2C1<br>2C2<br>2C3<br>A<br>2G | | -1.5 | "<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>" |
| | $I_{IL1}$ | 3009<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>" | 17<br>18<br>19<br>20<br>21<br>22<br>23<br>24<br>25<br>26<br>27<br>28 | 0.4 V<br>GND<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>" | GND<br>0.4 V<br>5.5 V<br>5.5 V<br>GND<br>"<br>"<br>"<br>5.5 V<br>5.5 V<br>GND<br>GND | 0.4 V<br>5.5 V<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>" | 5.5 V<br>0.4 V<br>5.5 V<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>" | 5.5 V<br>5.5 V<br>0.4 V<br>5.5 V<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>" | 5.5 V<br>"<br>"<br>0.4 V<br>5.5 V<br>"<br>"<br>"<br>"<br>"<br>"<br>" | "<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>" | 5.5 V<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>" | 5.5 V<br>"<br>"<br>"<br>0.4 V<br>"<br>"<br>"<br>"<br>"<br>" | 5.5 V<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>" | 5.5 V<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>" | 5.5 V<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>" | GND<br>GND<br>5.5 V<br>GND<br>5.5 V<br>GND<br>GND<br>5.5 V<br>GND<br>5.5 V<br>0.4 V<br>GND | GND<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>0.4 V | 5.5 V<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>" | 1G<br>B<br>1C3<br>1C2<br>1C1<br>1C0<br>2C0<br>2C1<br>2C2<br>2C3<br>A<br>2G | 1/<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>" | 1/<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>" | mA<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>" |
| | $I_{IH1}$ | 3010<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>" | 29<br>30<br>31<br>32<br>33<br>34<br>35<br>36<br>37<br>38<br>39<br>40 | 2.7 V<br>GND<br>5.5 V<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>" | GND<br>2.7 V<br>GND<br>GND<br>5.5 V<br>"<br>"<br>"<br>GND<br>GND<br>5.5 V<br>5.5 V | 2.7 V<br>GND<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>" | GND<br>2.7 V<br>GND<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>" | GND<br>GND<br>2.7 V<br>GND<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>" | GND<br>"<br>"<br>2.7 V<br>GND<br>"<br>"<br>"<br>"<br>"<br>"<br>" | "<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>" | 5.5 V<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>" | GND<br>"<br>"<br>"<br>"<br>"<br>2.7 V<br>"<br>"<br>"<br>" | GND<br>"<br>"<br>"<br>"<br>"<br>"<br>2.7 V<br>GND<br>GND<br>" | GND<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>2.7 V<br>" | GND<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>" | 5.5 V<br>5.5 V<br>GND<br>5.5 V<br>GND<br>5.5 V<br>5.5 V<br>GND<br>5.5 V<br>GND<br>2.7 V<br>GND | 5.5 V<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>GND<br>2.7 V | "<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>" | 1G<br>B<br>1C3<br>1C2<br>1C1<br>1C0<br>2C0<br>2C1<br>2C2<br>2C3<br>A<br>2G | | 20<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>" | µA<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>" |

See footnotes at end of device type 02.

Source: https://assist.dla.mil -- Downloaded: 2026/0-21T14:05Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 02 - Continued.
Terminal conditions (pins not designated may be high ≥ 2.0 V; low ≤ 0.7 V; or open).

| Subgroup | Symbol | MIL-STD-883 method | Cases E, F Case 2 Test no. | 1 2 1G | 2 3 B | 3 4 1C3 | 4 5 1C2 | 5 7 1C1 | 6 8 1C0 | 7 9 1Y | 8 10 GND | 9 12 2Y | 10 13 2C0 | 11 14 2C1 | 12 15 2C2 | 13 17 2C3 | 14 18 A | 15 19 2G | 16 20 $V_{CC}$ | Measured terminal | Limits Min | Limits Max | Unit |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1 $T_C$ = +25°C | $I_{IH2}$ | 3010 | 41 | 7.0 V | GND | | | | | | GND | | | | | 5.5 V | 5.5 V | 5.5 V | 1G | | 100 | µA |
| | | " | 42 | GND | 7.0 V | | | | | | " | | | | | 5.5 V | " | " | B | | " | " |
| | | " | 43 | 5.5 V | GND | 7.0 V | GND | GND | GND | | " | | GND | GND | GND | GND | " | " | 1C3 | | " | " |
| | | " | 44 | " | GND | GND | 7.0 V | GND | " | | " | | " | " | " | 5.5 V | " | " | 1C2 | | " | " |
| | | " | 45 | " | 5.5 V | " | GND | 7.0 V | " | | " | | " | " | " | GND | " | " | 1C1 | | " | " |
| | | " | 46 | " | " | " | " | GND | 7.0 V | | " | | " | " | " | 5.5 V | " | " | 1C0 | | " | " |
| | | " | 47 | " | " | " | " | " | GND | | " | | 7.0 V | " | " | 5.5 V | " | " | 2C0 | | " | " |
| | | " | 48 | " | " | " | " | " | " | | " | | GND | 7.0 V | " | GND | " | " | 2C1 | | " | " |
| | | " | 49 | " | GND | " | " | " | " | | " | | " | GND | 7.0 V | 5.5 V | " | " | 2C2 | | " | " |
| | | " | 50 | " | GND | " | " | " | " | | " | | " | GND | GND | GND | " | " | 2C3 | | " | " |
| | | " | 51 | " | 5.5 V | " | " | " | " | | " | | " | " | " | 7.0 V | GND | " | A | | " | " |
| | | " | 52 | " | 5.5 V | " | " | " | " | | " | | " | " | " | " | 7.0 V | " | 2G | | " | " |
| | $I_{OS}$ | 3011 | 53 | GND | GND | GND | GND | GND | 5.5 V | GND | " | GND | 5.5 V | GND | GND | GND | " | GND | " | 1Y | -15 | -100 | mA |
| | | 3011 | 54 | " | " | " | " | " | 5.5 V | | " | | 5.5 V | " | " | " | " | " | " | 2Y | -15 | -100 | " |
| | $I_{CC1}$ | 3005 | 55 | " | " | " | " | " | GND | | " | | GND | " | " | " | " | " | " | $V_{CC}$ | | 10 | " |
| 2 | Same tests, terminal conditions, and limits as subgroup 1, except $T_C$ = +125°C and $V_{IC}$ tests are omitted. | | | | | | | | | | | | | | | | | | | | | |
| 3 | Same tests, terminal conditions, and limits as subgroup 1, except $T_C$ = -55°C and $V_{IC}$ tests are omitted. | | | | | | | | | | | | | | | | | | | | | |
| 7 $T_C$ = +25°C | Functional tests | 3014 | 56 | A | A | A | A | A | A | L | GND | L | A | A | A | A | A | A | 5.0 V | 1Y, 2Y | 2/ | | |
| | | " | 57 | " | B | " | " | " | B | " | " | " | B | B | B | B | B | " | | " | | | |
| | | " | 58 | " | " | " | " | " | A | " | " | " | A | " | " | " | " | B | | " | | | |
| | | " | 59 | B | " | " | " | " | A | H | " | H | A | " | " | " | " | " | | " | | | |
| | | " | 60 | " | " | " | " | " | B | L | " | L | B | " | " | " | " | " | | " | | | |
| | | " | 61 | " | " | A | A | A | " | " | " | " | " | A | A | A | A | A | | " | | | |
| | | " | 62 | A | " | " | " | " | " | H | " | H | " | " | " | " | " | B | | " | | | |
| | | " | 63 | B | " | " | " | " | " | L | " | L | " | B | " | " | " | B | | " | | | |
| | | " | 64 | B | " | " | " | B | " | L | " | L | " | " | " | " | " | A | | " | | | |
| | | " | 65 | A | " | " | " | " | " | H | " | H | " | " | " | " | " | B | | " | | | |
| | | " | 66 | B | " | " | " | " | " | L | " | L | " | " | " | " | " | B | | " | | | |
| | | " | 67 | B | " | " | B | " | " | H | " | H | " | " | B | " | " | A | | " | | | |
| | | " | 68 | A | " | " | " | " | " | L | " | L | " | " | " | " | " | B | | " | | | |
| | | " | 69 | B | " | " | " | " | " | H | " | H | " | " | " | " | " | B | | " | | | |
| | | " | 70 | B | " | B | " | " | " | L | " | L | " | " | " | B | " | B | | " | | | |
| 8 | Repeat subgroup 7 tests at $T_C$ = +125°C and -55°C. | | | | | | | | | | | | | | | | | | | | | |
| 9 $T_C$ = +25°C | $t_{PLH1}$ | 3003 (Fig. 5) | 71 | GND | GND | | | | | OUT | GND | | | | | | GND | GND | 5.0 V | 1C0 to 1Y | 3 | 20 | ns |
| | | " | 72 | " | GND | | | | | " | " | | | | | | 5.0 V | " | " | 1C1 to 1Y | " | " | " |
| | | " | 73 | " | 5.0 V | | IN | | | " | " | | | | | | GND | " | " | 1C2 to 1Y | " | " | " |
| | | " | 74 | " | 5.0 V | IN | | IN | | | " | | | | | | 5.0 V | " | " | 1C3 to 1Y | " | " | " |
| | | " | 75 | " | GND | | | | IN | | " | | | | | | GND | " | " | 2C0 to 2Y | " | " | " |
| | | " | 76 | " | GND | | | | | | " | | | | | | 5.0 V | " | " | 2C1 to 2Y | " | " | " |
| | | " | 77 | " | 5.0 V | | | | | | " | | | | | | GND | " | " | 2C2 to 2Y | " | " | " |
| | | " | 78 | " | 5.0 V | | | | | | " | | | | | | 5.0 V | " | " | 2C3 to 2Y | " | " | " |
| | $t_{PHL1}$ | " | 79 | " | GND | | | | | OUT | " | | | | | | GND | " | " | 1C0 to 1Y | " | 31 | " |
| | | " | 80 | " | GND | | | | | " | " | | | | | | 5.0 V | " | " | 1C1 to 1Y | " | " | " |
| | | " | 81 | " | 5.0 V | | IN | | IN | | " | | | | | | GND | " | " | 1C2 to 1Y | " | " | " |
| | | " | 82 | " | 5.0 V | IN | | IN | | | " | | | | | | 5.0 V | " | " | 1C3 to 1Y | " | " | " |

See footnotes at end of device type 02.



Source: https://assist.dla.mil -- Downloaded: 2026-02-21T14:05Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 02 - Continued.
Terminal conditions (pins not designated may be high ≥ 2.0 V; low ≤ 0.7 V; or open).

| Subgroup | Symbol | MIL-STD-883 method | Cases E, F Case 2 Test no. | 1 2 16 | 2 3 B | 3 4 1C3 | 4 5 1C2 | 5 7 1C1 | 6 8 1C0 | 7 9 1Y | 8 10 GND | 9 12 2Y | 10 13 2C0 | 11 14 2C1 | 12 15 2C2 | 13 17 2C3 | 14 18 A | 15 19 2G | 16 20 $V_{CC}$ | Measured terminal | Limits Min | Limits Max | Unit |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 9 $T_C$ = +25°C | $t_{PHL1}$ | 3003 (Fig. 5) | 83 | GND | GND | | | | | | GND | OUT | IN | | | | GND | GND | 5.0 V | 2C0 to 2Y | 3 | 31 | ns |
| | | | 84 | " | GND | | | | | | " | " | | IN | | | 5.0 V | " | " | 2C1 to 2Y | " | " | " |
| | | | 85 | " | 5.0 V | | | | | | " | " | | | IN | | GND | " | " | 2C2 to 2Y | " | " | " |
| | | | 86 | " | 5.0 V | | | | | | " | " | | | | IN | 5.0 V | " | " | 2C3 to 2Y | " | " | " |
| | $t_{PLH3}$ | " | 87 | IN | GND | | | | 5.0 V | OUT | " | | | | | | GND | | " | 1G to 1Y | " | 29 | " |
| | | " | 88 | | " | | | | | | " | OUT | 5.0 V | | | | " | IN | " | 2G to 2Y | " | 29 | " |
| | $t_{PHL3}$ | " | 89 | IN | " | | | | 5.0 V | OUT | " | | | | | | " | | " | 1G to 1Y | " | 37 | " |
| | | " | 90 | | " | | | | | | " | OUT | 5.0 V | | | | " | IN | " | 2G to 2Y | " | 37 | " |
| | $t_{PLH5}$ | " | 91 | GND | 5.0 V | GND | 5.0 V | | | OUT | " | | | | 5.0 V | GND | IN | GND | " | A to 1Y | " | 34 | " |
| | | " | 92 | " | 5.0 V | GND | 5.0 V | | | | " | OUT | | | 5.0 V | GND | IN | " | " | A to 2Y | " | " | " |
| | | " | 93 | " | IN | 5.0 V | | GND | | OUT | " | | | GND | | 5.0 V | 5.0 V | " | " | B to 1Y | " | " | " |
| | | " | 94 | " | IN | 5.0 V | | " | | | " | OUT | | " | | 5.0 V | 5.0 V | " | " | B to 2Y | " | " | " |
| | $t_{PHL5}$ | " | 95 | " | GND | | | " | 5.0 V | OUT | " | | 5.0 V | " | | | IN | " | " | A to 1Y | " | 43 | " |
| | | " | 96 | " | GND | | | " | " | | " | OUT | " | " | | | IN | " | " | A to 2Y | " | " | " |
| | | " | 97 | " | IN | | GND | | " | OUT | " | | " | | GND | | GND | " | " | B to 1Y | " | " | " |
| | | " | 98 | " | IN | | GND | | " | | " | OUT | " | | GND | | GND | " | " | B to 2Y | " | " | " |
| 10 $T_C$ = +125°C | Same tests and terminal conditions as subgroup 9, except $T_C$ = +125°C and for following limits: $t_{PLH1}$ = 3 to 30 ns; $t_{PHL1}$ = 3 to 47 ns; $t_{PLH3}$ = 3 to 44; $t_{PHL3}$ = 3 to 56 ns; $t_{PLH5}$ = 3 to 51 ns; $t_{PHL5}$ = 3 to 65 ns. | | | | | | | | | | | | | | | | | | | | | | |
| 11 | Same tests, terminal conditions, and limits as subgroup 10, except $T_C$ = -55°C. | | | | | | | | | | | | | | | | | | | | | | |

1/ $I_{IL}$ limits shall be as follows:

| Test | Min/Max limits (mA) for circuit A | B | C | D | E | F | G |
|---|---|---|---|---|---|---|---|
| $I_{IL1}$ | Tests 17 and 28 -.001/-.15 Tests 18 through 27 -.12/-.36 | -.12/-.36 | -.12/-.36 | -.03/-.30 | Tests 17 and 28 -.16/-.40 Tests 18 and 27 -.12/-.36 Tests 19 through 26 -.16/-.40 | | 0/-.15 |

2/ Inputs: A ≥ 2.5 V minimum, B ≤ 0.4 V maximum.
Outputs: H ≥ 1.5 V, L ≤ 1.5 V.



Source: https://assist.dla.mil -- Downloaded: 2026-02-21T14:05Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 03.
Terminal conditions (pins not designated may be high ≥ 2.0 V; low ≤ 0.7 V; or open).

| Subgroup | Symbol | MIL-STD-883 method | Cases E, F / Case 2 / Test no. | 1 / 2 / S | 2 / 3 / 1A | 3 / 4 / 1B | 4 / 5 / 1Y | 5 / 7 / 2A | 6 / 8 / 2B | 7 / 9 / 2Y | 8 / 10 / GND | 9 / 12 / 3Y | 10 / 13 / 3B | 11 / 14 / 3A | 12 / 15 / 4Y | 13 / 17 / 4B | 14 / 18 / 4A | 15 / 19 / G | 16 / 20 / $V_{CC}$ | Measured terminal | Limits Min | Limits Max | Unit |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1 $T_C$ = +25°C | $V_{OH}$ | 3006 | 1 | 2.0 V | | 2.0 V | -.4 mA | | 2.0 V | -.4 mA | GND | | | | | | 0.7 V | 4.5 V | 1Y | 2.5 | | V |
| | | " | 2 | " | | | | | | | " | -.4 mA | 2.0 V | | -.4 mA | 2.0 V | " | " | 2Y | " | | " |
| | | " | 3 | " | | | | | | | " | | | | | | " | " | 3Y | " | | " |
| | | " | 4 | " | | | | | | | " | | | | | | " | " | 4Y | " | | " |
| | $V_{OL}$ | 3007 | 5 | | | | 4 mA | | | 4 mA | " | | | | | | 2.0 V | " | 1Y | | 0.4 | " |
| | | " | 6 | | | | | | | | " | 4 mA | | | | | " | " | 2Y | | " | " |
| | | " | 7 | | | | | | | | " | | | | | | " | " | 3Y | | " | " |
| | | " | 8 | | | | | | | | " | | | 4 mA | | | " | " | 4Y | | " | " |
| | $V_{IC}$ | | 9 | -18 mA | | | | | | | " | | | | | | | " | S | | -1.5 | " |
| | | | 10 | | -18 mA | | | | | | " | | | | | | | " | 1A | | " | " |
| | | | 11 | | | -18 mA | | | | | " | | | | | | | " | 1B | | " | " |
| | | | 12 | | | | | -18 mA | | | " | | | | | | | " | 2A | | " | " |
| | | | 13 | | | | | | -18 mA | | " | | | | | | | " | 2B | | " | " |
| | | | 14 | | | | | | | | " | | -18 mA | | | | | " | 3B | | " | " |
| | | | 15 | | | | | | | | " | | | | -18 mA | | | " | 3A | | " | " |
| | | | 16 | | | | | | | | " | | | | | -18 mA | | " | 4B | | " | " |
| | | | 17 | | | | | | | | " | | | | | | -18 mA | " | 4A | | " | " |
| | | | 18 | | | | | | | | " | | | | | | | " | G | | " | " |
| | $I_{IL1}$ | 3009 | 19 | GND | 0.4 V | 5.5 V | | | | | " | | | | | | GND | 5.5 V | 1A | 1/ | 1/ | mA |
| | | " | 20 | 5.5 V | 5.5 V | 0.4 V | | | | | " | | | | | | " | " | 1B | " | " | " |
| | | " | 21 | GND | | | | 0.4 V | 5.5 V | | " | | | | | | " | " | 2A | " | " | " |
| | | " | 22 | 5.5 V | | | | 5.5 V | 0.4 V | | " | | | | | | " | " | 2B | " | " | " |
| | | " | 23 | 5.5 V | | | | | | | " | | 0.4 V | 5.5 V | | | " | " | 3B | " | " | " |
| | | " | 24 | GND | | | | | | | " | | 5.5 V | 0.4 V | | | " | " | 3A | " | " | " |
| | | " | 25 | 5.5 V | | | | | | | " | | | | 0.4 V | 5.5 V | " | " | 4B | " | " | " |
| | | " | 26 | GND | | | | | | | " | | | | 5.5 V | 0.4 V | " | " | 4A | " | " | " |
| | $I_{IL2}$ | " | 27 | 0.4 V | | | | | | | " | | | | | | 5.5 V | " | S | " | " | " |
| | | " | 28 | 5.5 V | | | | | | | " | | | | | | 0.4 V | " | G | " | " | " |
| | $I_{IH1}$ | 3010 | 29 | 5.5 V | 2.7 V | | | | | | " | | | | | | | " | 1A | | 20 | μA |
| | | " | 30 | GND | | 2.7 V | | | | | " | | | | | | | " | 1B | | " | " |
| | | " | 31 | 5.5 V | | | | 2.7 V | | | " | | | | | | | " | 2A | | " | " |
| | | " | 32 | GND | | | | | 2.7 V | | " | | | | | | | " | 2B | | " | " |
| | | " | 33 | GND | | | | | | | " | | 2.7 V | | | | | " | 3B | | " | " |
| | | " | 34 | 5.5 V | | | | | | | " | | | 2.7 V | | | | " | 3A | | " | " |
| | | " | 35 | GND | | | | | | | " | | | | 2.7 V | | | " | 4B | | " | " |
| | | " | 36 | 5.5 V | | | | | | | " | | | | | 2.7 V | | " | 4A | | " | " |
| | $I_{IH2}$ | " | 37 | 5.5 V | 7.0 V | | | | | | " | | | | | | | " | 1A | | 100 | " |
| | | " | 38 | GND | | 7.0 V | | | | | " | | | | | | | " | 1B | | " | " |
| | | " | 39 | 5.5 V | | | | 7.0 V | | | " | | | | | | | " | 2A | | " | " |
| | | " | 40 | GND | | | | | 7.0 V | | " | | | | | | | " | 2B | | " | " |
| | | " | 41 | GND | | | | | | | " | | 7.0 V | | | | | " | 3B | | " | " |
| | | " | 42 | 5.5 V | | | | | | | " | | | 7.0 V | | | | " | 3A | | " | " |
| | | " | 43 | GND | | | | | | | " | | | | 7.0 V | | | " | 4B | | " | " |
| | | " | 44 | 5.5 V | | | | | | | " | | | | | 7.0 V | | " | 4A | | " | " |
| | $I_{IH3}$ | " | 45 | 2.7 V | | | | | | | " | | | | | | GND | " | S | | 40 | " |
| | | " | 46 3/ | GND | | | | | | | " | | | | | | 2.7 V | " | G | | 40 | " |

See footnotes at end of device type 03.



Source: https://assist.dla.mil -- Downloaded: 2026-02-21T14:05Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 03 - Continued.
Terminal conditions (pins not designated may be high ≥ 2.0 V; low ≤ 0.7 V; or open).

| Subgroup | Symbol | MIL-STD-883 method | Cases E, F Case 2 Test no. | 1 2 S | 2 3 1A | 3 4 1B | 4 5 1Y | 5 7 2A | 6 8 2B | 7 9 2Y | 8 10 GND | 9 12 3Y | 10 13 3B | 11 14 3A | 12 15 4Y | 13 17 4B | 14 18 4A | 15 19 G | 16 20 $V_{CC}$ | Measured terminal | Limits Min | Limits Max | Unit |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1 $T_C$ = +25°C | $I_{IH4}$ | 3010 | 47 | 7.0 V | | | | | | | GND | | | | | | | GND | 5.5 V | S | | 200 | µA |
| | | 3010 | 48 3/ | GND | | | | | | | " | | | | | | | 7.0 V | " | G | | 200 | µA |
| | $I_{OS}$ | 3011 | 49 | " | 5.5 V | 5.5 V | GND | | | | " | | | | | | | GND | " | 1Y | -15 | -100 | mA |
| | | " | 50 | " | | | | 5.5 V | 5.5 V | GND | " | | | | | | | " | " | 2Y | " | " | " |
| | | " | 51 | " | | | | | | | " | GND | 5.5 V | 5.5 V | | | | " | " | 3Y | " | " | " |
| | | " | 52 | " | | | | | | | " | | | | GND | 5.5 V | 5.5 V | " | " | 4Y | " | " | " |
| | $I_{CC1}$ | 3005 | 53 | 5.5 V | 5.5 V | 5.5 V | | 5.5 V | 5.5 V | | " | | 5.5 V | 5.5 V | | 5.5 V | 5.5 V | 5.5 V | " | $V_{CC}$ | | 16 | " |
| 2 | Same tests, terminal conditions, and limits as subgroup 1, except $T_C$ = +125°C and $V_{IC}$ tests are omitted. | | | | | | | | | | | | | | | | | | | | | | |
| 3 | Same tests, terminal conditions, and limits as subgroup 1, except $T_C$ = -55°C and $V_{IC}$ tests are omitted. | | | | | | | | | | | | | | | | | | | | | | |
| 7 $T_C$ = +25°C | Functional tests | 3014 | 54 | A | A | A | L | A | A | L | GND | L | A | A | L | A | A | A | 5.0 V | All outputs | | 2/ | |
| | | " | 55 | B | A | A | " | A | A | " | " | " | A | A | " | A | A | " | " | | | | |
| | | " | 56 | " | B | B | " | B | B | " | " | " | B | B | " | B | B | " | " | | | | |
| | | " | 57 | " | B | " | " | B | " | " | " | " | " | B | " | " | B | B | " | | | | |
| | | " | 58 | " | A | " | H | A | " | H | " | H | " | A | H | " | A | " | " | | | | |
| | | " | 59 | " | A | A | H | A | A | H | " | H | A | A | H | A | A | " | " | | | | |
| | | " | 60 | " | B | " | L | B | " | L | " | L | " | B | L | " | B | " | " | | | | |
| | | " | 61 | A | B | " | H | B | " | H | " | H | " | B | H | " | B | " | " | | | | |
| | | " | 62 | " | A | " | H | A | " | H | " | H | " | A | H | " | A | " | " | | | | |
| | | " | 63 | " | A | B | L | A | B | L | " | L | B | A | L | B | A | " | " | | | | |
| 8 | Repeat subgroup 7 tests at $T_C$ = +125°C and $T_C$ = -55°C. | | | | | | | | | | | | | | | | | | | | | | |
| 9 $T_C$ = +25°C | $t_{PLH1}$ | 3003 (Fig. 5) | 64 | GND | IN | | OUT | | | | GND | | | | | | | GND | 5.0 V | 1A to 1Y | 3 | 19 | ns |
| | | | 65 | 5.0 V | | IN | OUT | | | | " | | | | | | | " | " | 1B to 1Y | " | " | " |
| | | " | 66 | GND | | | | IN | | OUT | " | | | | | | | " | " | 2A to 2Y | " | " | " |
| | | " | 67 | 5.0 V | | | | | IN | OUT | " | | | | | | | " | " | 2B to 2Y | " | " | " |
| | | " | 68 | 5.0 V | | | | | | | " | OUT | IN | | | | | " | " | 3B to 3Y | " | " | " |
| | | " | 69 | GND | | | | | | | " | OUT | | IN | | | | " | " | 3A to 3Y | " | " | " |
| | | " | 70 | 5.0 V | | | | | | | " | | | | OUT | IN | | " | " | 4B to 4Y | " | " | " |
| | | " | 71 | GND | | | | | | | " | | | | OUT | | IN | " | " | 4A to 4Y | " | " | " |
| | $t_{PHL1}$ | " | 72 | GND | IN | | OUT | | | | " | | | | | | | " | " | 1A to 1Y | " | " | " |
| | | " | 73 | 5.0 V | | IN | OUT | | | | " | | | | | | | " | " | 1B to 1Y | " | " | " |
| | | " | 74 | GND | | | | IN | | OUT | " | | | | | | | " | " | 2A to 2Y | " | " | " |
| | | " | 75 | 5.0 V | | | | | IN | OUT | " | | | | | | | " | " | 2B to 2Y | " | " | " |
| | | " | 76 | 5.0 V | | | | | | | " | OUT | IN | | | | | " | " | 3B to 3Y | " | " | " |
| | | " | 77 | GND | | | | | | | " | OUT | | IN | | | | " | " | 3A to 3Y | " | " | " |
| | | " | 78 | 5.0 V | | | | | | | " | | | | OUT | IN | | " | " | 4B to 4Y | " | " | " |
| | | " | 79 | GND | | | | | | | " | | | | OUT | | IN | " | " | 4A to 4Y | " | " | " |
| | $t_{PLH3}$ | " | 80 | 5.0 V | | 5.0 V | OUT | | | | " | | | | | | | IN | " | G to 1Y | " | 2[illegible] | " |
| | | " | 81 | " | | | | | 5.0 V | OUT | " | | | | | | | " | " | G to 2Y | " | " | " |
| | | " | 82 | " | | | | | | | " | OUT | 5.0 V | | | | | " | " | G to 3Y | " | " | " |
| | | " | 83 | " | | | | | | | " | | | | OUT | 5.0 V | | " | " | G to 4Y | " | " | " |

See footnotes at end of device type 03.



Source: https://assist.dla.mil -- Downloaded: 2026-02-21T14:05Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 03 - Continued.
Terminal conditions (pins not designated may be high ≥ 2.0 V; low ≤ 0.7 V; or open).

| Subgroup | Symbol | MIL-STD-883 method | Cases E, F / Case 2 / Test no. | 1 / 2 / S | 2 / 3 / 1A | 3 / 4 / 1B | 4 / 5 / 1Y | 5 / 7 / 2A | 6 / 8 / 2B | 7 / 9 / 2Y | 8 / 10 / GND | 9 / 12 / 3Y | 10 / 13 / 3B | 11 / 14 / 3A | 12 / 15 / 4Y | 13 / 17 / 4B | 14 / 18 / 4A | 15 / 19 / G | 16 / 20 / $V_{CC}$ | Measured terminal | Limits Min | Limits Max | Unit |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 9 $T_C$ = +25°C | $t_{PHL3}$ | 3003 (Fig. 5) | 84 | GND | 5.0 V | | OUT | 5.0 V | | OUT | GND | | | | | | | IN | 5.0 V | G to 1Y | 3 | 26 | ns |
| | | | 85 | " | | | | | | | " | | | | | | | " | " | G to 2Y | " | " | " |
| | | | 86 | " | | | | | | | " | OUT | | 5.0 V | | | | " | " | G to 3Y | " | " | " |
| | | | 87 | " | | | | | | | " | | | | OUT | | 5.0 V | " | " | G to 4Y | " | " | " |
| | $t_{PLH5}$ | " | 88 | IN | 5.0 V | GND | OUT | 5.0 V | GND | OUT | " | | | | | | | GND | " | S to 1Y | " | 28 | " |
| | | " | 89 | " | | | | | | | " | | | | | | | " | " | S to 2Y | " | " | " |
| | | " | 90 | " | | | | | | | " | OUT | GND | 5.0 V | | | | " | " | S to 3Y | " | " | " |
| | | " | 91 | " | | | | | | | " | | | | OUT | GND | 5.0 V | " | " | S to 4Y | " | " | " |
| | $t_{PHL5}$ | " | 92 | " | GND | 5.0 V | OUT | GND | 5.0 V | OUT | " | | | | | | | " | " | S to 1Y | " | 32 | " |
| | | " | 93 | " | | | | | | | " | | | | | | | " | " | S to 2Y | " | " | " |
| | | " | 94 | " | | | | | | | " | OUT | 5.0 V | GND | | | | " | " | S to 3Y | " | " | " |
| | | " | 95 | " | | | | | | | " | | | | OUT | 5.0 V | GND | " | " | S to 4Y | " | " | " |
| 10 $T_C$ = +125°C | Same tests and terminal conditions as subgroup 9, except $T_C$ = +125°C and for following limits: $t_{PLH1}$ and $t_{PHL1}$ = 3 to 29 ns; $t_{PLH3}$ = 3 to 38 ns; $t_{PHL3}$ = 3 to 39 ns; $t_{PLH5}$ = 3 to 42 ns; $t_{PHL5}$ = 3 to 48 ns. | | | | | | | | | | | | | | | | | | | | | | |
| 11 | Same tests, terminal conditions, and limits as subgroup 10, except $T_C$ = -55°C. | | | | | | | | | | | | | | | | | | | | | | |

1/ $I_{IL}$ limits shall be as follows:

| Test | Min/Max limits (mA) for circuit A | B | C | D | E | F | G |
|---|---|---|---|---|---|---|---|
| $I_{IL1}$ | -.135/-.370 | -.16/-.40 | -.20/-.44 | -.03/-.30 | -.16/-.40 | -.12/-.36 | 0/-.15 |
| $I_{IL2}$ | -.270/-.740 | -.12/-.36 | -.40/-.88 | -.06/-.60 | -.23/-.71 for test 27 and -.32/-.80 for test 28 | -.24/-.72 except -.12/-.36 test 28 | 0/-.15 |

2/ Inputs: A ≥ 2.5 V minimum, B ≤ 0.4 V maximum.
Outputs: H ≥ 1.5 V, L ≤ 1.5 V.

3/ For circuit F test 46 $I_{IH3}$ limit is 20 µA.
For circuit F test 48 $I_{IH3}$ limit is 100 µA.



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:05Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 04.
Terminal conditions (pins not designated may be high ≥ 2.0 V; low ≤ 0.7 V; or open).

| Subgroup | Symbol | MIL-STD-883 method | Cases E, F / Case 2 / Test no. | 1 / 2 / S | 2 / 3 / 1A | 3 / 4 / 1B | 4 / 5 / 1Y | 5 / 7 / 2A | 6 / 8 / 2B | 7 / 9 / 2Y | 8 / 10 / GND | 9 / 12 / 3Y | 10 / 13 / 3B | 11 / 14 / 3A | 12 / 15 / 4Y | 13 / 17 / 4B | 14 / 18 / 4A | 15 / 19 / G | 16 / 20 / $V_{CC}$ | Measured terminal | Limits Min | Limits Max | Unit |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| $T_C$ = +25°C | $V_{OH}$ | 3006 | 1 | | | | -.4 mA | | | | GND | | | | | | | 4.5 V | 1Y | 2.5 | | V |
| | | " | 2 | | | | | | | -.4 mA | " | | | | | | 2.0 V | " | 2Y | " | | " |
| | | " | 3 | | | | | | | | " | -.4 mA | | | | | " | " | 3Y | " | | " |
| | | " | 4 | | | | | | | | " | | | -.4 mA | | | " | " | 4Y | " | | " |
| | $V_{OL}$ | 3007 | 5 | 2.0 V | | 2.0 V | 4 mA | | | | " | | | | | | 0.7 V | " | 1Y | | 0.4 | " |
| | | " | 6 | " | | | | | 2.0 V | 4 mA | " | | | | | | " | " | 2Y | | " | " |
| | | " | 7 | " | | | | | | | " | 4 mA | 2.0 V | | | | " | " | 3Y | | " | " |
| | | " | 8 | " | | | | | | | " | | | 4 mA | 2.0 V | | " | " | 4Y | | " | " |
| | $V_{IC}$ | | 9 | -18 mA | | | | | | | " | | | | | | | " | S | | -1.5 | " |
| | | | 10 | | -18 mA | | | | | | " | | | | | | | " | 1A | | " | " |
| | | | 11 | | | -18 mA | | | | | " | | | | | | | " | 1B | | " | " |
| | | | 12 | | | | | -18 mA | | | " | | | | | | | " | 2A | | " | " |
| | | | 13 | | | | | | -18 mA | | " | | | | | | | " | 2B | | " | " |
| | | | 14 | | | | | | | | " | | -18 mA | | | | | " | 3B | | " | " |
| | | | 15 | | | | | | | | " | | | -18 mA | | | | " | 3A | | " | " |
| | | | 16 | | | | | | | | " | | | | -18 mA | | | " | 4B | | " | " |
| | | | 17 | | | | | | | | " | | | | | -18 mA | | " | 4A | | " | " |
| | | | 18 | | | | | | | | " | | | | | | -18 mA | " | G | | " | " |
| | $I_{IL1}$ | 3009 | 19 | GND | 0.4 V | 5.5 V | | | | | " | | | | | | GND | 5.5 V | 1A | 1/ | 1/ | mA |
| | | " | 20 | 5.5 V | 5.5 V | 0.4 V | | | | | " | | | | | | " | " | 1B | " | " | " |
| | | " | 21 | GND | | | | 0.4 V | 5.5 V | | " | | | | | | " | " | 2A | " | " | " |
| | | " | 22 | 5.5 V | | | | 5.5 V | 0.4 V | | " | | | | | | " | " | 2B | " | " | " |
| | | " | 23 | 5.5 V | | | | | | | " | | 0.4 V | 5.5 V | | | " | " | 3B | " | " | " |
| | | " | 24 | GND | | | | | | | " | | 5.5 V | 0.4 V | | | " | " | 3A | " | " | " |
| | | " | 25 | 5.5 V | | | | | | | " | | | | 0.4 V | 5.5 V | " | " | 4B | " | " | " |
| | | " | 26 | GND | | | | | | | " | | | | 5.5 V | 0.4 V | " | " | 4A | " | " | " |
| | $I_{IL2}$ | " | 27 | 0.4 V | | | | | | | " | | | | | | 5.5 V | " | S | " | " | " |
| | | " | 28 | 5.5 V | | | | | | | " | | | | | | 0.4 V | " | G | " | " | " |
| | $I_{IH1}$ | 3010 | 29 | 5.5 V | 2.7 V | | | | | | " | | | | | | | " | 1A | | 20 | µA |
| | | " | 30 | GND | | 2.7 V | | | | | " | | | | | | | " | 1B | | " | " |
| | | " | 31 | 5.5 V | | | | 2.7 V | | | " | | | | | | | " | 2A | | " | " |
| | | " | 32 | GND | | | | | 2.7 V | | " | | | | | | | " | 2B | | " | " |
| | | " | 33 | GND | | | | | | | " | | 2.7 V | | | | | " | 3B | | " | " |
| | | " | 34 | 5.5 V | | | | | | | " | | | 2.7 V | | | | " | 3A | | " | " |
| | | " | 35 | GND | | | | | | | " | | | | 2.7 V | | | " | 4B | | " | " |
| | | " | 36 | 5.5 V | | | | | | | " | | | | | 2.7 V | | " | 4A | | " | " |
| | $I_{IH2}$ | " | 37 | 5.5 V | 7.0 V | | | | | | " | | | | | | | " | 1A | | 100 | " |
| | | " | 38 | GND | | 7.0 V | | | | | " | | | | | | | " | 1B | | " | " |
| | | " | 39 | 5.5 V | | | | 7.0 V | | | " | | | | | | | " | 2A | | " | " |
| | | " | 40 | GND | | | | | 7.0 V | | " | | | | | | | " | 2B | | " | " |
| | | " | 41 | GND | | | | | | | " | | 7.0 V | | | | | " | 3B | | " | " |
| | | " | 42 | 5.5 V | | | | | | | " | | | 7.0 V | | | | " | 3A | | " | " |
| | | " | 43 | GND | | | | | | | " | | | | 7.0 V | | | " | 4B | | " | " |
| | | " | 44 | 5.5 V | | | | | | | " | | | | | 7.0 V | | " | 4A | | " | " |
| | $I_{IH3}$ | " | 45 | 2.7 V | | | | | | | " | | | | | | GND | " | S | | 40 | " |
| | | " | 46 | GND | | | | | | | " | | | | | | 2.7 V | " | G | | 40 | " |

See footnotes at end of device type 04.

Source: https://assist.dla.mil -- Downloaded: 20260-21T14:05Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 04 - Continued.
Terminal conditions (pins not designated may be high ≥ 2.0 V; low ≤ 0.7 V; or open).

| Subgroup | Symbol | MIL-STD-883 method | Cases E, F Case 2 Test no. | 1 2 S | 2 3 1A | 3 4 1B | 4 5 1Y | 5 7 2A | 6 8 2B | 7 9 2Y | 8 10 GND | 9 12 3Y | 10 13 3B | 11 14 3A | 12 15 4Y | 13 17 4B | 14 18 4A | 15 19 G | 16 20 $V_{CC}$ | Measured terminal | Limits Min | Limits Max | Unit |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1 $T_C$ = +25°C | $I_{IH4}$ | 3010 | 47 | 7.0 V | | | | | | | GND | | | | | | | GND | 5.5 V | S | | 200 | µA |
| | | 3010 | 48 | GND | | | | | | | " | | | | | | | 7.0 V | " | G | | 200 | µA |
| | $I_{OS}$ | 3011 | 49 | | | | GND | | | GND | " | GND | | | GND | | | 5.5 V | " | 1Y | -15 | -100 | mA |
| | | " | 50 | | | | | | | | " | | | | | | | " | " | 2Y | " | " | " |
| | | " | 51 | | | | | | | | " | | | | | | | " | " | 3Y | " | " | " |
| | | " | 52 | | | | | | | | " | | | | | | | " | " | 4Y | " | " | " |
| | $I_{CC1}$ | 3005 | 53 | 5.5 V | 5.5 V | 5.5 V | | 5.5 V | 5.5 V | | " | | 5.5 V | 5.5 V | | 5.5 V | 5.5 V | " | " | $V_{CC}$ | | 8.0 | " |
| 2 | Same tests, terminal conditions, and limits as subgroup 1, except $T_C$ = +125°C and $V_{IC}$ tests are omitted. | | | | | | | | | | | | | | | | | | | | | | |
| 3 | Same tests, terminal conditions, and limits as subgroup 1, except $T_C$ = -55°C and $V_{IC}$ tests are omitted. | | | | | | | | | | | | | | | | | | | | | | |
| 7 $T_C$ = +25°C | Functional tests | 3014 | 54 | A | A | A | H | A | A | H | GND | H | A | A | H | A | A | A | 5.0 V | All outputs | 2/ | | |
| | | " | 55 | B | A | A | " | A | A | " | " | " | A | A | " | A | A | " | " | | | | |
| | | " | 56 | " | B | B | " | B | B | " | " | " | B | B | " | B | B | B | " | | | | |
| | | " | 57 | " | B | B | " | B | B | " | " | " | " | B | " | " | B | " | " | | | | |
| | | " | 58 | " | A | A | L | A | A | L | " | L | A | A | L | A | A | " | " | | | | |
| | | " | 59 | " | A | A | L | A | A | L | " | L | A | A | L | A | A | " | " | | | | |
| | | " | 60 | " | B | B | H | B | B | H | " | H | " | B | H | " | B | " | " | | | | |
| | | " | 61 | A | B | B | L | B | B | L | " | L | " | B | L | " | B | " | " | | | | |
| | | " | 62 | " | A | A | L | A | A | L | " | L | " | A | L | " | A | " | " | | | | |
| | | " | 63 | " | A | A | H | A | B | H | " | H | B | A | H | B | A | " | " | | | | |
| 8 | Repeat subgroup 7 tests at $T_C$ = +125°C and $T_C$ = -55°C. | | | | | | | | | | | | | | | | | | | | | | |
| 9 $T_C$ = +25°C | $t_{PLH1}$ | 3003 (Fig. 5) | 64 | GND | IN | | OUT | | | | GND | | | | | | | GND | 5.0 V | 1A to 1Y | 3 | 17 | ns |
| | | " | 65 | 5.0 V | | IN | OUT | IN | | | " | | | | | | | " | " | 1B to 1Y | " | " | " |
| | | " | 66 | GND | | | | | IN | OUT | " | | | | | | | " | " | 2A to 2Y | " | " | " |
| | | " | 67 | 5.0 V | | | | | | OUT | " | OUT | IN | | | | | " | " | 2B to 2Y | " | " | " |
| | | " | 68 | 5.0 V | | | | | | | " | | | IN | | | | " | " | 3B to 3Y | " | " | " |
| | | " | 69 | GND | | | | | | | " | | | | OUT | IN | | " | " | 3A to 3Y | " | " | " |
| | | " | 70 | 5.0 V | | | | | | | " | | | | OUT | | IN | " | " | 4B to 4Y | " | " | " |
| | | " | 71 | GND | | | | | | | " | | | | | | | " | " | 4A to 4Y | " | " | " |
| | $t_{PHL1}$ | " | 72 | GND | IN | | OUT | | | | " | | | | | | | " | " | 1A to 1Y | " | " | " |
| | | " | 73 | 5.0 V | | IN | OUT | IN | | | " | | | | | | | " | " | 1B to 1Y | " | " | " |
| | | " | 74 | GND | | | | | IN | OUT | " | | | | | | | " | " | 2A to 2Y | " | " | " |
| | | " | 75 | 5.0 V | | | | | | OUT | " | OUT | IN | | | | | " | " | 2B to 2Y | " | " | " |
| | | " | 76 | 5.0 V | | | | | | | " | | | IN | | | | " | " | 3B to 3Y | " | " | " |
| | | " | 77 | GND | | | | | | | " | | | | OUT | IN | | " | " | 3A to 3Y | " | " | " |
| | | " | 78 | 5.0 V | | | | | | | " | | | | OUT | | IN | " | " | 4B to 4Y | " | " | " |
| | | " | 79 | GND | | | | | | | " | | | | | | | " | " | 4A to 4Y | " | " | " |
| | $t_{PLH3}$ | " | 80 | GND | 5.0 V | | OUT | | | | " | | | | | | | IN | " | 1G to 1Y | " | 22 | " |
| | | " | 81 | " | | | | 5.0 V | | OUT | " | OUT | | 5.0 V | | | | " | " | 2G to 2Y | " | " | " |
| | | " | 82 | " | | | | | | | " | | | | OUT | | 5.0 V | " | " | 3G to 3Y | " | " | " |
| | | " | 83 | " | | | | | | | " | | | | | | | " | " | 4G to 4Y | " | " | " |

See footnotes at end of device type 04.



Source: https://assist.dla.mil -- Downloaded: 2026-02-21T14:05Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 04 - Continued.
Terminal conditions (pins not designated may be high ≥ 2.0 V; low ≤ 0.7 V; or open).

| Subgroup | Symbol | MIL-STD-883 method | Cases E, F / Case 2 / Test no. | 1 / 2 / S | 2 / 3 / 1A | 3 / 4 / 1B | 4 / 5 / 1Y | 5 / 7 / 2A | 6 / 8 / 2B | 7 / 9 / 2Y | 8 / 10 / GND | 9 / 12 / 3Y | 10 / 13 / 3B | 11 / 14 / 3A | 12 / 15 / 4Y | 13 / 17 / 4B | 14 / 18 / 4A | 15 / 19 / G | 16 / 20 / $V_{CC}$ | Measured terminal | Limits Min | Limits Max | Unit |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 9 $T_C$ = +25°C | $t_{PHL3}$ | 3003 (Fig. 5) | 84 | 5.0 V | | 5.0 V | OUT | | | | GND | | | | | | | IN | 5.0 V | G to 1Y | 3 | 23 | ns |
| | | " | 85 | " | | | | | 5.0 V | OUT | " | | | | | | | " | " | G to 2Y | " | " | " |
| | | " | 86 | " | | | | | | | " | OUT | 5.0 V | | | | | " | " | G to 3Y | " | " | " |
| | | " | 87 | " | | | | | | | " | | | OUT | 5.0 V | | | " | " | G to 4Y | " | " | " |
| | $t_{PLH5}$ | " | 88 | IN | GND | 5.0 V | OUT | | | | " | | | | | | | GND | " | S to 1Y | " | 25 | " |
| | | " | 89 | " | | | | GND | 5.0 V | OUT | " | | | | | | | " | " | S to 2Y | " | " | " |
| | | " | 90 | " | | | | | | | " | OUT | 5.0 V | GND | | | | " | " | S to 3Y | " | " | " |
| | | " | 91 | " | | | | | | | " | | | OUT | 5.0 V | GND | | " | " | S to 4Y | " | " | " |
| | $t_{PHL5}$ | " | 92 | " | 5.0 V | GND | OUT | | | | " | | | | | | | " | " | S to 1Y | " | 29 | " |
| | | " | 93 | " | | | | 5.0 V | GND | OUT | " | | | | | | | " | " | S to 2Y | " | " | " |
| | | " | 94 | " | | | | | | | " | OUT | GND | 5.0 V | | | | " | " | S to 3Y | " | " | " |
| | | " | 95 | " | | | | | | | " | | | OUT | GND | 5.0 V | | " | " | S to 4Y | " | " | " |
| 10 $T_C$ = +125°C | Same tests and terminal conditions as subgroup 9, except $T_C$ = +125°C and for following limits: $t_{PHL1}$ and $t_{PLH1}$ = 3 to 26 ns; $t_{PLH3}$ = 3 to 33 ns; $t_{PHL3}$ = 3 to 35 ns; $t_{PLH5}$ = 3 to 38 ns; $t_{PHL5}$ = 3 to 44 ns. | | | | | | | | | | | | | | | | | | | | | | |
| 11 | Same tests, terminal conditions, and limits as subgroup 10, except $T_C$ = -55°C. | | | | | | | | | | | | | | | | | | | | | | |

1/ $I_{IL}$ limits shall be as follows:

| Test | Min/Max limits (mA) for circuit A | B | C | D | E | F | G |
|---|---|---|---|---|---|---|---|
| $I_{IL1}$ | -.135/-.370 | -.16/-.40 | -.20/-.44 | -.03/-.30 | -.16/-.40 | -.12/-.36 | 0/-.15 |
| $I_{IL2}$ | -.270/-.740 | -.12/-.36 | -.40/-.88 | -.06/-.60 | -.23/-.71 for test 27 and -.32/-.80 test 28 | -.24/-.72 except -.12/-.36 test 28 | 0/-.15 |

2/ Inputs: A ≥ 2.5 V minimum, B ≤ 0.4 V maximum.
Outputs: H ≥ 1.5 V, L ≤ 1.5 V.



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:05Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 05.
Terminal conditions (pins not designated may be high ≥ 2.0 V; low ≤ 0.7 V; or open).

| Subgroup | Symbol | MIL-STD-883 method | Cases E, F / Case 2 / Test no. | 1 / 2 / D3 | 2 / 3 / D2 | 3 / 4 / D1 | 4 / 5 / D0 | 5 / 7 / Y | 6 / 8 / W | 7 / 9 / S | 8 / 10 / GND | 9 / 12 / C | 10 / 13 / B | 11 / 14 / A | 12 / 15 / D7 | 13 / 17 / D6 | 14 / 18 / D5 | 15 / 19 / D4 | 16 / 20 / $V_{CC}$ | Measured terminal | Limits Min | Limits Max | Unit |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1<br>$T_C$ = +25°C | $V_{OH}$ | 3006<br>3006 | 1<br>2 | | | | 0.7 V | -1 mA | -1 mA | 0.7 V<br>" | GND<br>" | 2.0 V<br>0.7 V | 2.0 V<br>0.7 V | 2.0 V<br>0.7 V | 2.0 V | | | | 4.5 V<br>" | Y<br>W | 2.4<br>2.4 | | V<br>" |
| | $V_{OL}$ | 3007<br>3007 | 3<br>4 | | | | 0.7 V | 4 mA | 4 mA | "<br>" | "<br>" | 0.7 V<br>2.0 V | 0.7 V<br>2.0 V | 0.7 V<br>2.0 V | 2.0 V | | | | "<br>" | Y<br>W | | 0.4<br>0.4 | "<br>" |
| | $V_{IC}$ | | 5<br>6<br>7<br>8<br>9<br>10<br>11<br>12<br>13<br>14<br>15<br>16 | -18 mA | -18 mA | -18 mA | -18 mA | | | -18 mA | "<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>" | -18 mA | -18 mA | -18 mA | -18 mA | -18 mA | -18 mA | -18 mA | "<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>" | B3<br>B2<br>B1<br>B0<br>S<br>C<br>B<br>A<br>D7<br>D6<br>D5<br>D4 | | -1.5<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>" | "<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>" |
| | $I_{IL1}$ | 3009<br>"<br>"<br>"<br>"<br>"<br>" | 17<br>18<br>19<br>20<br>21<br>22<br>23<br>24 | 0.4 V<br>5.5 V<br>"<br>"<br>"<br>"<br>"<br>" | 5.5 V<br>0.4 V<br>5.5 V<br>"<br>"<br>"<br>"<br>" | 5.5 V<br>5.5 V<br>0.4 V<br>5.5 V<br>"<br>"<br>"<br>" | 5.5 V<br>"<br>"<br>0.4 V<br>5.5 V<br>"<br>"<br>" | | | GND<br>"<br>"<br>"<br>"<br>"<br>"<br>" | "<br>"<br>"<br>"<br>"<br>"<br>"<br>" | GND<br>"<br>"<br>5.5 V<br>"<br>"<br>GND<br>GND | 5.5 V<br>5.5 V<br>GND<br>GND<br>5.5 V<br>5.5 V<br>GND<br>GND | 5.5 V<br>GND<br>5.5 V<br>GND<br>5.5 V<br>GND<br>5.5 V<br>GND | 5.5 V<br>"<br>"<br>"<br>0.4 V<br>5.5 V<br>"<br>" | 5.5 V<br>"<br>"<br>"<br>0.4 V<br>5.5 V<br>5.5 V<br>5.5 V | 5.5 V<br>"<br>"<br>"<br>"<br>0.4 V<br>0.4 V<br>5.5 V | 5.5 V<br>"<br>"<br>"<br>"<br>"<br>0.4 V<br>0.4 V | 5.5 V<br>"<br>"<br>"<br>"<br>"<br>"<br>" | D3<br>D2<br>D1<br>D0<br>D7<br>D6<br>D5<br>D4 | 1/<br>"<br>"<br>"<br>"<br>"<br>"<br>" | 1/<br>"<br>"<br>"<br>"<br>"<br>"<br>" | mA<br>"<br>"<br>"<br>"<br>"<br>"<br>" |
| | $I_{IL2}$ | " | 25 | | | | | | | 0.4 V | " | | | | | | | | " | S | " | " | " |
| | $I_{IL3}$ | "<br>"<br>" | 26<br>27<br>28 | | | | | | | | "<br>"<br>" | 0.4 V | 0.4 V | 0.4 V | | | | | "<br>"<br>" | C<br>B<br>A | "<br>"<br>" | "<br>"<br>" | "<br>"<br>" |
| | $I_{IH1}$ | 3010<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>" | 29<br>30<br>31<br>32<br>33<br>34<br>35<br>36<br>37<br>38<br>39<br>40 | 2.7 V<br>GND<br>"<br>"<br><br><br><br><br>GND<br>"<br>"<br>" | GND<br>2.7 V<br>GND<br>GND<br><br><br><br><br>GND<br>"<br>"<br>" | GND<br>GND<br>2.7 V<br>GND<br><br><br><br><br>GND<br>"<br>"<br>" | GND<br>"<br>"<br>2.7 V<br><br><br><br><br>GND<br>"<br>"<br>" | | | GND<br>"<br>"<br>"<br>2.7 V<br><br><br><br>GND<br>"<br>"<br>" | "<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>" | 5.5 V<br>"<br>"<br>"<br>"<br>2.7 V<br><br><br>GND<br>"<br>"<br>" | GND<br>GND<br>5.5 V<br>5.5 V<br><br><br>2.7 V<br><br>GND<br>GND<br>5.5 V<br>5.5 V | GND<br>5.5 V<br>GND<br>5.5 V<br><br><br><br>2.7 V<br>GND<br>5.5 V<br>GND<br>5.5 V | GND<br>"<br>"<br>"<br><br><br><br><br>2.7 V<br>GND<br>"<br>" | GND<br>"<br>"<br>"<br><br><br><br><br>GND<br>2.7 V<br>GND<br>GND | GND<br>"<br>"<br>"<br><br><br><br><br>GND<br>GND<br>2.7 V<br>GND | GND<br>"<br>"<br>"<br><br><br><br><br>GND<br>"<br>"<br>2.7 V | "<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>" | D3<br>D2<br>D1<br>D0<br>S<br>C<br>B<br>A<br>D7<br>D6<br>D5<br>D4 | | 20<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>" | µA<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>" |

See footnotes at end of device type 05.



Source: https://assist.dla.mil -- Downloaded: 2026-02-21T14:05Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 05 - Continued.
Terminal conditions (pins not designated may be high ≥ 2.0 V; low ≤ 0.7 V; or open).

| Subgroup | Symbol | MIL-STD-883 method | Cases E, F / Case 2 / Test no. | 1 / 2 / D3 | 2 / 3 / D2 | 3 / 4 / D1 | 4 / 5 / D0 | 5 / 7 / Y | 6 / 8 / W | 7 / 9 / S | 8 / 10 / GND | 9 / 12 / C | 10 / 13 / B | 11 / 14 / A | 12 / 15 / D7 | 13 / 17 / D6 | 14 / 18 / D5 | 15 / 19 / D4 | 16 / 20 / $V_{CC}$ | Measured terminal | Limits Min | Limits Max | Unit |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1<br>$T_C$ = +25°C | $I_{IH2}$ | 3010 | 41 | 7.0 V | GND | GND | GND | | | GND | GND | 5.5 V | GND | GND | GND | GND | GND | GND | 5.5 V | D3 | | 100 | µA |
| | | " | 42 | GND | 7.0 V | GND | " | | | " | " | " | GND | 5.5 V | " | " | " | " | " | D2 | | " | " |
| | | " | 43 | " | GND | 7.0 V | " | | | " | " | " | 5.5 V | GND | " | " | " | " | " | D1 | | " | " |
| | | " | 44 | " | GND | GND | 7.0 V | | | " | " | " | 5.5 V | 5.5 V | " | " | " | " | " | D0 | | " | " |
| | | " | 45 | | | | | | | 7.0 V | " | | | | | | | | " | S | | " | " |
| | | " | 46 | | | | | | | " | " | 7.0 V | | | | | | | " | C | | " | " |
| | | " | 47 | | | | | | | " | " | " | 7.0 V | | | | | | " | B | | " | " |
| | | " | 48 | | | | | | | " | " | " | | 7.0 V | | | | | " | A | | " | " |
| | | " | 49 | GND | GND | GND | GND | | | GND | " | GND | GND | GND | 7.0 V | GND | GND | GND | " | D7 | | " | " |
| | | " | 50 | " | " | " | " | | | " | " | " | GND | 5.5 V | GND | 7.0 V | GND | " | " | D6 | | " | " |
| | | " | 51 | " | " | " | " | | | " | " | " | 5.5 V | GND | " | GND | 7.0 V | " | " | D5 | | " | " |
| | | " | 52 | " | " | " | " | | | " | " | " | 5.5 V | 5.5 V | " | " | GND | 7.0 V | " | D4 | | " | " |
| | $I_{OZH}$ | | 53 | 5.5 V | 5.5 V | 5.5 V | 5.5 V | 2.7 V | | 2.0 V | " | 5.5 V | 5.5 V | 5.5 V | 0.7 V | 5.5 V | 5.5 V | 5.5 V | " | Y | | 20 | " |
| | | | 54 | " | " | " | " | | 2.7 V | " | " | | | | 2.0 V | " | " | " | " | W | | 20 | " |
| | $I_{OZL}$ | | 55 | " | " | " | " | 0.4 V | | " | " | " | " | " | 2.0 V | " | " | " | " | Y | | -20 | " |
| | | | 56 | " | " | " | " | | 0.4 V | " | " | " | " | " | 0.7 V | " | " | " | " | W | | -20 | " |
| | $I_{OS}$ 2/ | 3011 | 57 | | | | GND | GND | | GND | " | " | " | " | 5.5 V | " | " | " | " | Y | -30 | -130 | mA |
| | | 3011 | 58 | | | | | | GND | " | " | GND | GND | GND | | | | | " | W | -30 | -130 | " |
| | $I_{CC1}$ | 3005 | 59 | 5.5 V | 5.5 V | 5.5 V | 5.5 V | | | " | " | 5.5 V | 5.5 V | 5.5 V | 5.5 V | 5.5 V | 5.5 V | 5.5 V | " | $V_{CC}$ | | 10 | " |
| | $I_{CC2}$ | 3006 | 60 | 5.5 V | 5.5 V | 5.5 V | 5.5 V | | | 5.5 V | " | 5.5 V | 5.5 V | 5.5 V | 5.5 V | 5.5 V | 5.5 V | 5.5 V | " | $V_{CC}$ | | 12 | " |
| 2 | Same tests, terminal conditions, and limits as subgroup 1, except $T_C$ = +125°C and $V_{IC}$ tests are omitted. | | | | | | | | | | | | | | | | | | | | | | |
| 3 | Same tests, terminal conditions, and limits as subgroup 1, except $T_C$ = -55°C and $V_{IC}$ tests are omitted. | | | | | | | | | | | | | | | | | | | | | | |
| 7<br>$T_C$ = +25°C | Functional tests | 3014 | 61 | B | B | B | A | H | L | B | GND | B | B | B | B | B | B | B | 5.0 V | Y, W | 3/ | | |
| | | " | 62 | A | A | A | A | L | H | " | " | " | " | " | A | A | A | A | " | " | | | |
| | | " | 63 | " | " | " | B | H | L | " | " | " | " | " | " | " | " | " | " | " | | | |
| | | " | 64 | " | " | " | " | L | H | " | " | " | " | A | " | " | " | " | " | " | | | |
| | | " | 65 | " | " | B | " | H | L | " | " | " | " | A | " | " | " | " | " | " | | | |
| | | " | 66 | " | " | " | " | L | H | " | " | " | " | B | " | " | " | " | " | " | | | |
| | | " | 67 | " | B | " | " | H | L | " | " | " | " | B | " | " | " | " | " | " | | | |
| | | " | 68 | " | " | " | " | L | H | " | " | " | " | A | " | " | " | " | " | " | | | |
| | | " | 69 | B | " | " | " | H | L | " | " | " | " | A | " | " | " | " | " | " | | | |
| | | " | 70 | " | " | " | " | L | H | " | " | " | B | " | " | " | " | " | " | " | | | |
| | | " | 71 | " | " | " | " | H | L | " | " | " | " | B | " | " | " | " | " | " | | | |
| | | " | 72 | " | " | " | " | L | H | " | " | " | " | A | " | " | " | B | " | " | | | |
| | | " | 73 | " | " | " | " | H | L | " | " | " | " | A | " | " | " | " | " | " | | | |
| | | " | 74 | " | " | " | " | L | H | " | " | " | " | B | " | " | " | " | " | " | | | |
| | | " | 75 | " | " | " | " | H | L | " | " | " | A | B | " | " | B | " | " | " | | | |
| | | " | 76 | " | " | " | " | L | H | " | " | " | " | B | " | " | " | " | " | " | | | |
| | | " | 77 | " | " | " | " | H | L | " | " | " | " | A | B | " | " | " | " | " | | | |
| 8 | Repeat subgroup 7 tests at $T_C$ = +125°C and -55°C. | | | | | | | | | | | | | | | | | | | | | | |
| 9<br>$T_C$ = +25°C | $t_{PLH1}$ | 3003 (Fig. 5) | 78 | | | | IN | OUT | | GND | GND | GND | GND | GND | | | | | 5.0 V | D0 to Y | 3 | 33 | ns |
| | | " | 79 | | | | " | " | | " | " | " | GND | 5.0 V | | | | | " | D1 to Y | " | " | " |
| | | " | 80 | | IN | | " | " | | " | " | " | 5.0 V | GND | | | | | " | D2 to Y | " | " | " |
| | | " | 81 | IN | | IN | " | " | | " | " | " | 5.0 V | 5.0 V | | | | | " | D3 to Y | " | " | " |

See footnotes at end of device type 05.

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T14:05Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 05 - Continued.
Terminal conditions (pins not designated may be high ≥ 2.0 V; low ≤ 0.7 V; or open).

| Subgroup | Symbol | MIL-STD-883 method | Cases E, F | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | Measured terminal | Limits | | Unit |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | Case 2 | 2 | 3 | 4 | 5 | 7 | 8 | 9 | 10 | 12 | 13 | 14 | 15 | 17 | 18 | 19 | 20 | | Min | Max | |
| | | | Test no. | D3 | D2 | D1 | D0 | Y | W | S | GND | C | B | A | D7 | D6 | D5 | D4 | $V_{CC}$ | | | | |
| 9<br>$T_C$ = +25°C | $t_{PLH1}$ | 3003 (Fig. 5) | 82 | | | | | OUT | | GND | GND | 5.0 V | GND | GND | | | | IN | 5.0 V | D4 to Y | 3 | 33 | ns |
| | | | 83 | | | | | " | | " | " | " | GND | 5.0 V | | | IN | | " | D5 to Y | " | " | " |
| | | | 84 | | | | | " | | " | " | " | 5.0 V | GND | | IN | | | " | D6 to Y | " | " | " |
| | | | 85 | | | | | " | | " | " | " | 5.0 V | 5.0 V | IN | | | | " | D7 to Y | " | " | " |
| | $t_{PHL1}$ | " | 86 | | | | IN | " | | " | " | GND | GND | GND | | | | | " | D0 to Y | " | " | " |
| | | " | 87 | | | IN | | " | | " | " | " | GND | 5.0 V | | | | | " | D1 to Y | " | " | " |
| | | " | 88 | | IN | | | " | | " | " | " | 5.0 V | GND | | | | | " | D2 to Y | " | " | " |
| | | " | 89 | IN | | | | " | | " | " | " | 5.0 V | 5.0 V | | | | | " | D3 to Y | " | " | " |
| | | " | 90 | | | | | " | | " | " | 5.0 V | GND | GND | | | | IN | " | D4 to Y | " | " | " |
| | | " | 91 | | | | | " | | " | " | " | GND | 5.0 V | | | IN | | " | D5 to Y | " | " | " |
| | | " | 92 | | | | | " | | " | " | " | 5.0 V | GND | | IN | | | " | D6 to Y | " | " | " |
| | | " | 93 | | | | | " | | " | " | " | 5.0 V | 5.0 V | IN | | | | " | D7 to Y | " | " | " |
| | $t_{PLH2}$ | " | 94 | | | | IN | | OUT | " | " | GND | GND | GND | | | | | " | D0 to W | " | 20 | " |
| | | " | 95 | | | IN | | | " | " | " | " | GND | 5.0 V | | | | | " | D1 to W | " | " | " |
| | | " | 96 | | IN | | | | " | " | " | " | 5.0 V | GND | | | | | " | D2 to W | " | " | " |
| | | " | 97 | IN | | | | | " | " | " | " | 5.0 V | 5.0 V | | | | | " | D3 to W | " | " | " |
| | | " | 98 | | | | | | " | " | " | 5.0 V | GND | GND | | | | IN | " | D4 to W | " | " | " |
| | | " | 99 | | | | | | " | " | " | " | GND | 5.0 V | | | IN | | " | D5 to W | " | " | " |
| | | " | 100 | | | | | | " | " | " | " | 5.0 V | GND | | IN | | | " | D6 to W | " | " | " |
| | | " | 101 | | | | | | " | " | " | " | 5.0 V | 5.0 V | IN | | | | " | D7 to W | " | " | " |
| | $t_{PHL2}$ | " | 102 | | | | IN | | " | " | " | GND | GND | GND | | | | | " | D0 to W | " | " | " |
| | | " | 103 | | | IN | | | " | " | " | " | GND | 5.0 V | | | | | " | D1 to W | " | " | " |
| | | " | 104 | | IN | | | | " | " | " | " | 5.0 V | GND | | | | | " | D2 to W | " | " | " |
| | | " | 105 | IN | | | | | " | " | " | " | 5.0 V | 5.0 V | | | | | " | D3 to W | " | " | " |
| | | " | 106 | | | | | | " | " | " | 5.0 V | GND | GND | | | | IN | " | D4 to W | " | " | " |
| | | " | 107 | | | | | | " | " | " | " | GND | 5.0 V | | | IN | | " | D5 to W | " | " | " |
| | | " | 108 | | | | | | " | " | " | " | 5.0 V | GND | | IN | | | " | D6 to W | " | " | " |
| | | " | 109 | | | | | | " | " | " | " | 5.0 V | 5.0 V | IN | | | | " | D7 to W | " | " | " |
| | $t_{PLH5}$ | " | 110 | | | 5.0 V | GND | OUT | | " | " | GND | GND | IN | | | | | " | A to Y | " | 50 | " |
| | | " | 111 | | 5.0 V | | " | " | | " | " | GND | IN | GND | | | | | " | B to Y | " | " | " |
| | | " | 112 | | | | " | " | | " | " | IN | GND | GND | | | | 5.0 V | " | C to Y | " | " | " |
| | $t_{PHL5}$ | " | 113 | | | 5.0 V | " | " | | " | " | GND | GND | IN | | | | | " | A to Y | " | " | " |
| | | " | 114 | | 5.0 V | | " | " | | " | " | GND | IN | GND | | | | | " | B to Y | " | " | " |
| | | " | 115 | | | | " | " | | " | " | IN | GND | GND | | | | 5.0 V | " | C to Y | " | " | " |
| | $t_{PLH6}$ | " | 116 | | | 5.0 V | " | | OUT | " | " | GND | GND | IN | | | | | " | A to W | " | 38 | " |
| | | " | 117 | | 5.0 V | | " | | " | " | " | GND | IN | GND | | | | | " | B to W | " | " | " |
| | | " | 118 | | | | " | | " | " | " | IN | GND | GND | | | | 5.0 V | " | C to W | " | " | " |
| | $t_{PHL6}$ | " | 119 | | | 5.0 V | " | | " | " | " | GND | GND | IN | | | | | " | A to W | " | " | " |
| | | " | 120 | | 5.0 V | | " | | " | " | " | GND | IN | GND | | | | | " | B to W | " | " | " |
| | | " | 121 | | | | " | | " | " | " | IN | GND | " | | | | 5.0 V | " | C to W | " | " | " |
| | $t_{PZH1}$ | (Fig. 5) | 122 | | | | 5.0 V | OUT | | IN | " | GND | " | " | | | | | " | S to Y | " | 50 | " |
| | $t_{PZH2}$ | " | 123 | | | | GND | | OUT | " | " | " | " | " | | | | | " | S to W | " | 32 | " |
| | $t_{PZL1}$ | " | 124 | | | | GND | OUT | | " | " | " | " | " | | | | | " | S to Y | " | 45 | " |

See footnotes at end of device type 05.

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T14:05Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 05 - Continued.
Terminal conditions (pins not designated may be high ≥ 2.0 V; low ≤ 0.7 V; or open).

| Subgroup | Symbol | MIL-STD-883 method | Cases E, F | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | Measured terminal | Limits | | Unit |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | Case 2 | 2 | 3 | 4 | 5 | 7 | 8 | 9 | 10 | 12 | 13 | 14 | 15 | 17 | 18 | 19 | 20 | | Min | Max | |
| | | | Test no. | D3 | D2 | D1 | DO | Y | W | S | GND | C | B | A | D7 | D6 | D5 | D4 | $V_{CC}$ | | | | |
| $T_C$ = +25°C | $t_{PZL2}$ | (Fig. 5) | 125 | | | | 5.0 V | | OUT | IN | GND | GND | GND | GND | | | | | 5.0 V | S to W | 3 | 45 | ns |
| | $t_{PHZ1}$ | " | 126 | | | | 5.0 V | OUT | | " | " | " | " | " | | | | | " | S to Y | " | 50 | " |
| | $t_{PHZ2}$ | " | 127 | | | | GND | | OUT | " | " | " | " | " | | | | | " | S to W | " | 60 | " |
| | $t_{PLZ1}$ | " | 128 | | | | GND | OUT | | " | " | " | " | " | | | | | " | S to Y | " | 30 | " |
| | $t_{PLZ2}$ | " | 129 | | | | 5.0 V | | OUT | " | " | " | " | " | | | | | " | S to W | " | 30 | " |
| 10<br>$T_C$ = +125°C | Same tests and terminal conditions as subgroup 9, except $T_C$ = +125°C and for following limits:<br>$t_{PLH1}$ and $t_{PHL1}$ = 3 to 50 ns; $t_{PLH2}$ and $t_{PHL2}$ = 3 to 30 ns; $t_{PLH5}$ and $t_{PHL5}$ = 3 to 75 ns; $t_{PLH6}$ and $t_{PHL6}$ = 3 to 57 ns; $t_{PZH1}$ = 3 to 75 ns; $t_{PZH2}$ = 3 to 48 ns; $t_{PZL1}$ and $t_{PZL2}$ = 3 to 68 ns; $t_{PHZ1}$ = 3 to 75 ns; $t_{PHZ2}$ = 3 to 90 ns; $t_{PLZ1}$ and $t_{PLZ2}$ = 3 to 45 ns. | | | | | | | | | | | | | | | | | | | | | | |
| 11 | Same tests, terminal conditions, and limits as subgroup 10, except $T_C$ = -55°C. | | | | | | | | | | | | | | | | | | | | | | |

1/ $I_{IL}$ limits shall be as follows:

| Test | Min/Max limits (mA) for circuit | | | | | | |
|---|---|---|---|---|---|---|---|
| | A | B | C | D | E | F | G |
| $I_{IL1}$ | -.16/-.40 | -.12/-.36 | -.16/-.40 | -.03/-.30 | -.005/-.72 | -.105/-.345 | 0/-.15 |
| $I_{IL2}$ | -.01/-.20 | -.12/-.36 | -.12/-.36 | -.03/-.30 | -.16/-.40 | -.16/-.40 | 0/-.15 |
| $I_{IL3}$ | -.12/-.36 | -.12/-.36 | -.12/-.36 | -.03/-.30 | -.10/-.34 | -.16/-.40 | 0/-.15 |

2/ $I_{OS}$ limits for circuits A, B, D, F and G are -15 to -100 mA.

3/ Inputs: A ≥ 2.4 V minimum, B ≤ 0.4 V maximum.
Outputs: H ≥ 1.5 V, L ≤ 1.5 V.

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T14:05Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 06.
Terminal conditions (pins not designated may be high ≥ 2.0 V; low ≤ 0.7 V; or open).

| Subgroup | Symbol | MIL-STD-883 method | Cases E, F / Case 2 / Test no. | 1 / 2 / S | 2 / 3 / 1A | 3 / 4 / 1B | 4 / 5 / 1Y | 5 / 7 / 2A | 6 / 8 / 2B | 7 / 9 / 2Y | 8 / 10 / GND | 9 / 12 / 3Y | 10 / 13 / 3B | 11 / 14 / 3A | 12 / 15 / 4Y | 13 / 17 / 4B | 14 / 18 / 4A | 15 / 19 / G | 16 / 20 / $V_{CC}$ | Measured terminal | Limits Min | Limits Max | Unit |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1<br>$T_C$ = +25°C | $V_{OH}$ | 3006 | 1 | 0.7 V | 2.0 V | | -1 mA | 2.0 V | | -1 mA | GND | -1 mA | | 2.0 V | | | 0.7 V | 4.5 V | 1Y | 2.4 | | V |
| | | " | 2 | " | | | | | | | " | | | | -1 mA | | " | " | 2Y | " | | " |
| | | " | 3 | " | | | | | | | " | | | | | 2.0 V | " | " | 3Y | " | | " |
| | | " | 4 | " | | | | | | | " | | | | | | " | " | 4Y | " | | " |
| | $V_{OL}$ | 3007 | 5 | 2.0 V | | 0.7 V | 12 mA | | 0.7 V | 12 mA | " | 12 mA | 0.7 V | | | | " | " | 1Y | | 0.4 | " |
| | | " | 6 | " | | | | | | | " | | | | 12 mA | 0.7 V | " | " | 2Y | | " | " |
| | | " | 7 | " | | | | | | | " | | | | | | " | " | 3Y | | " | " |
| | | " | 8 | " | | | | | | | " | | | | | | " | " | 4Y | | " | " |
| | $V_{IC}$ | | 9 | -18 mA | -18 mA | -18 mA | | -18 mA | -18 mA | | " | | -18 mA | -18 mA | | -18 mA | -18 mA | -18 mA | " | S | | -1.5 | " |
| | | | 10 | | | | | | | | " | | | | | | | " | 1A | | " | " |
| | | | 11 | | | | | | | | " | | | | | | | " | 1B | | " | " |
| | | | 12 | | | | | | | | " | | | | | | | " | 2A | | " | " |
| | | | 13 | | | | | | | | " | | | | | | | " | 2B | | " | " |
| | | | 14 | | | | | | | | " | | | | | | | " | 3B | | " | " |
| | | | 15 | | | | | | | | " | | | | | | | " | 3A | | " | " |
| | | | 16 | | | | | | | | " | | | | | | | " | 4B | | " | " |
| | | | 17 | | | | | | | | " | | | | | | | " | 4A | | " | " |
| | | | 18 | | | | | | | | " | | | | | | | " | G | | " | " |
| | $I_{IL1}$ | 3009 | 19 | GND | 0.4 V | 0.4 V | | 0.4 V | 0.4 V | | " | | 0.4 V | 0.4 V | | 0.4 V | 0.4 V | | 5.5 V | 1A | 1/ | 1/ | mA |
| | | " | 20 | 5.5 V | | | | | | | " | | | | | | | " | 1B | " | " | " |
| | | " | 21 | GND | | | | | | | " | | | | | | | " | 2A | " | " | " |
| | | " | 22 | 5.5 V | | | | | | | " | | | | | | | " | 2B | " | " | " |
| | | " | 23 | 5.5 V | | | | | | | " | | | | | | | " | 3B | " | " | " |
| | | " | 24 | GND | | | | | | | " | | | | | | | " | 3A | " | " | " |
| | | " | 25 | 5.5 V | | | | | | | " | | | | | | | " | 4B | " | " | " |
| | | " | 26 | GND | | | | | | | " | | | | | | | " | 4A | " | " | " |
| | $I_{IL2}$ | " | 27 | | | | | | | | " | | | | | | 0.4 V | " | G | " | " | " |
| | | " | 28 | 0.4 V | | | | | | | " | | | | | | | " | S | " | " | " |
| | $I_{IH1}$ | 3010 | 29 | 5.5 V | 2.7 V | 2.7 V | | 2.7 V | 2.7 V | | " | | 2.7 V | 2.7 V | | 2.7 V | 2.7 V | 2.7 V | " | 1A | | 20 | µA |
| | | " | 30 | GND | | | | | | | " | | | | | | | " | 1B | | " | " |
| | | " | 31 | 5.5 V | | | | | | | " | | | | | | | " | 2A | | " | " |
| | | " | 32 | GND | | | | | | | " | | | | | | | " | 2B | | " | " |
| | | " | 33 | GND | | | | | | | " | | | | | | | " | 3B | | " | " |
| | | " | 34 | 5.5 V | | | | | | | " | | | | | | | " | 3A | | " | " |
| | | " | 35 | GND | | | | | | | " | | | | | | | " | 4B | | " | " |
| | | " | 36 | 5.5 V | | | | | | | " | | | | | | | " | 4A | | " | " |
| | | " | 37 | | | | | | | | " | | | | | | | " | G | | " | " |
| | $I_{IH2}$ | " | 38 | 5.5 V | 7.0 V | 7.0 V | | 7.0 V | 7.0 V | | " | | 7.0 V | 7.0 V | | 7.0 V | 7.0 V | 7.0 V | " | 1A | | 100 | " |
| | | " | 39 | GND | | | | | | | " | | | | | | | " | 1B | | " | " |
| | | " | 40 | 5.5 V | | | | | | | " | | | | | | | " | 2A | | " | " |
| | | " | 41 | GND | | | | | | | " | | | | | | | " | 2B | | " | " |
| | | " | 42 | GND | | | | | | | " | | | | | | | " | 3B | | " | " |
| | | " | 43 | 5.5 V | | | | | | | " | | | | | | | " | 3A | | " | " |
| | | " | 44 | GND | | | | | | | " | | | | | | | " | 4B | | " | " |
| | | " | 45 | 5.5 V | | | | | | | " | | | | | | | " | 4A | | " | " |
| | | " | 46 | | | | | | | | " | | | | | | | " | G | | " | " |
| | $I_{IH3}$ | " | 47 | 2.7 V | | | | | | | " | | | | | | | " | S | | 40 | " |

See footnotes at end of device type 06.



Source: https://assist.dla.mil -- Downloaded: 2026-02-21T14:05Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 06 - Continued.
Terminal conditions (pins not designated may be high ≥ 2.0 V; low ≤ 0.7 V; or open).

| Subgroup | Symbol | MIL-STD-883 method | Cases E, F / Case 2 / Test no. | 1 / 2 / S | 2 / 3 / 1A | 3 / 4 / 1B | 4 / 5 / 1Y | 5 / 7 / 2A | 6 / 8 / 2B | 7 / 9 / 2Y | 8 / 10 / GND | 9 / 12 / 3Y | 10 / 13 / 3B | 11 / 14 / 3A | 12 / 15 / 4Y | 13 / 17 / 4B | 14 / 18 / 4A | 15 / 19 / G | 16 / 20 / $V_{CC}$ | Measured terminal | Limits Min | Limits Max | Unit |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1 $T_C$ = +25°C | $I_{IH4}$ | 3010 | 48 | 7.0 V | | | | | | | GND | | | | | | | | 5.5 V | S | | 200 | µA |
| | $I_{OZH}$ | | 49 | 2.0 V | 0.7 V | | 2.7 V | | | | " | | | | | | | 2.0 V | " | 1Y | | 20 | " |
| | | | 50 | " | | | | 0.7 V | | 2.7 V | " | | | | | | | " | " | 2Y | | " | " |
| | | | 51 | " | | | | | | | " | 2.7 V | | 0.7 V | | | | " | " | 3Y | | " | " |
| | | | 52 | " | | | | | | | " | | | | 2.7 V | | 0.7 V | " | " | 4Y | | " | " |
| | $I_{OZL}$ | | 53 | 0.7 V | | 2.0 V | 0.4 V | | | | " | | | | | | | " | " | 1Y | | -20 | " |
| | | | 54 | " | | | | | 2.0 V | 0.4 V | " | | | | | | | " | " | 2Y | | " | " |
| | | | 55 | " | | | | | | | " | 0.4 V | 2.0 V | | | | | " | " | 3Y | | " | " |
| | | | 56 | " | | | | | | | " | | | 0.4 V | 2.0 V | | | " | " | 4Y | | " | " |
| | $I_{OS}$ 2/ | 3011 | 57 | GND | 5.5 V | | GND | | | | " | | | | | | | GND | " | 1Y | -30 | -130 | mA |
| | | " | 58 | " | | | | 5.5 V | | GND | " | | | | | | | " | " | 2Y | " | " | " |
| | | " | 59 | " | | | | | | | " | GND | | 5.5 V | | | | " | " | 3Y | " | " | " |
| | | " | 60 | " | | | | | | | " | | | | GND | | 5.5 V | " | " | 4Y | " | " | " |
| | $I_{CC1}$ | 3005 | 61 | | 5.5 V | 5.5 V | | 5.5 V | 5.5 V | | " | | 5.5 V | 5.5 V | | 5.5 V | 5.5 V | " | " | $V_{CC}$ | | 12 | " |
| | $I_{CC2}$ | " | 62 | | GND | GND | | GND | GND | | " | | GND | GND | | GND | GND | " | " | $V_{CC}$ | | 18 | " |
| | $I_{CC3}$ | " | 63 | | GND | GND | | GND | GND | | " | | GND | GND | | GND | GND | 5.5 V | " | $V_{CC}$ | | 19 | " |
| 2 | Same tests, terminal conditions, and limits as subgroup 1, except $T_C$ = +125°C and $V_{IC}$ tests are omitted. | | | | | | | | | | | | | | | | | | | | | | |
| 3 | Same tests, terminal conditions, and limits as subgroup 1, except $T_C$ = -55°C and $V_{IC}$ tests are omitted. | | | | | | | | | | | | | | | | | | | | | | |
| 7 $T_C$ = +25°C | Functional tests | 3014 | 64 | B | B | B | L | B | B | L | GND | L | B | B | L | B | B | B | 5.0 V | All outputs | | 3/ | |
| | | " | 65 | " | B | A | L | B | A | L | " | L | A | B | L | A | B | " | " | " | | | |
| | | " | 66 | " | A | " | H | A | " | H | " | H | " | A | H | " | A | " | " | " | | | |
| | | " | 67 | " | B | " | L | B | " | L | " | L | " | B | L | " | B | " | " | " | | | |
| | | " | 68 | A | B | " | H | B | " | H | " | H | " | B | H | " | B | " | " | " | | | |
| | | " | 69 | " | A | " | H | A | " | H | " | H | " | A | H | " | A | " | " | " | | | |
| | | " | 70 | " | A | B | L | A | B | L | " | L | B | A | L | B | A | " | " | " | | | |
| | | " | 71 | " | B | B | L | B | B | L | " | L | B | B | L | B | B | " | " | " | | | |
| 8 | Repeat subgroup 7 tests at $T_C$ = +125°C, and $T_C$ = -55°C. | | | | | | | | | | | | | | | | | | | | | | |
| 9 $T_C$ = +25°C | $t_{PLH1}$ | 3003 (Fig. 5) | 72 | GND | IN | | OUT | | | | GND | | | | | | | GND | 5.0 V | 1A to 1Y | 3 | 23 | ns |
| | | " | 73 | 5.0 V | | IN | OUT | | | | " | | | | | | | " | " | 1B to 1Y | " | " | " |
| | | " | 74 | GND | | | | IN | | | " | | | | | | | " | " | 2A to 2Y | " | " | " |
| | | " | 75 | 5.0 V | | | | | IN | OUT | " | | | | | | | " | " | 2B to 2Y | " | " | " |
| | | " | 76 | 5.0 V | | | | | | OUT | " | OUT | IN | | | | | " | " | 3B to 3Y | " | " | " |
| | | " | 77 | GND | | | | | | | " | OUT | | IN | | | | " | " | 3A to 3Y | " | " | " |
| | | " | 78 | 5.0 V | | | | | | | " | | | | OUT | IN | | " | " | 4B to 4Y | " | " | " |
| | | " | 79 | GND | | | | | | | " | | | | OUT | | IN | " | " | 4A to 4Y | " | " | " |

See footnotes at end of device type 06.

Source: https://assist.dla.mil -- Downloaded: 20260-21T14:05Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 06 - Continued.
Terminal conditions (pins not designated may be high ≥ 2.0 V; low ≤ 0.7 V; or open).

| Subgroup | Symbol | MIL-STD-883 method | Cases E, F Case 2 Test no. | 1 2 S | 2 3 1A | 3 4 1B | 4 5 1Y | 5 7 2A | 6 8 2B | 7 9 2Y | 8 10 GND | 9 12 3Y | 10 13 3B | 11 14 3A | 12 15 4Y | 13 17 4B | 14 18 4A | 15 19 G | 16 20 $V_{CC}$ | Measured terminal | Limits Min | Limits Max | Unit |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 9 $T_C$ = +25°C | $t_{PHL1}$ | 3003 (Fig. 5) | 80 | GND | IN | | OUT | | | | GND | | | | | | | GND | 5.0 V | 1A to 1Y | 3 | 23 | ns |
| | | " | 81 | 5.0 V | | IN | OUT | IN | | OUT | " | | | | | | | " | " | 1B to 1Y | " | " | " |
| | | " | 82 | GND | | | | | IN | OUT | " | | | | | | | " | " | 2A to 2Y | " | " | " |
| | | " | 83 | 5.0 V | | | | | | OUT | " | | | | | | | " | " | 2B to 2Y | " | " | " |
| | | " | 84 | 5.0 V | | | | | | | " | OUT | IN | | | | | " | " | 3B to 3Y | " | " | " |
| | | " | 85 | GND | | | | | | | " | OUT | | IN | | | | " | " | 3A to 3Y | " | " | " |
| | | " | 86 | 5.0 V | | | | | | | " | | | | OUT | IN | | " | " | 4B to 4Y | " | " | " |
| | | " | 87 | GND | | | | | | | " | | | | OUT | | IN | " | " | 4A to 4Y | " | " | " |
| | $t_{PLH5}$ | " | 88 | IN | GND | 5.0 V | OUT | GND | 5.0 V | OUT | " | OUT | 5.0 V | GND | OUT | 5.0 V | GND | " | " | S to 1Y | " | 26 | " |
| | | " | 89 | " | | | | | | | " | | | | | | | " | " | S to 2Y | " | " | " |
| | | " | 90 | " | | | | | | | " | | | | | | | " | " | S to 3Y | " | " | " |
| | | " | 91 | " | | | | | | | " | | | | | | | " | " | S to 4Y | " | " | " |
| | $t_{PHL5}$ | " | 92 | " | 5.0 V | GND | OUT | 5.0 V | GND | OUT | " | OUT | GND | 5.0 V | OUT | GND | 5.0 V | " | " | S to 1Y | " | " | " |
| | | " | 93 | " | | | | | | | " | | | | | | | " | " | S to 2Y | " | " | " |
| | | " | 94 | " | | | | | | | " | | | | | | | " | " | S to 3Y | " | " | " |
| | | " | 95 | " | | | | | | | " | | | | | | | " | " | S to 4Y | " | " | " |
| | $t_{PZH3}$ | (Fig. 5) | 96 | GND | 5.0 V | | OUT | 5.0 V | | OUT | " | OUT | | 5.0 V | OUT | | 5.0 V | IN | " | G to 1Y | " | 35 | " |
| | | " | 97 | " | | | | | | | " | | | | | | | " | " | G to 2Y | " | " | " |
| | | " | 98 | " | | | | | | | " | | | | | | | " | " | G to 3Y | " | " | " |
| | | " | 99 | " | | | | | | | " | | | | | | | " | " | G to 4Y | " | " | " |
| | $t_{PZL3}$ | " | 100 | 5.0 V | | GND | OUT | | GND | OUT | " | OUT | GND | | OUT | GND | | " | " | G to 1Y | " | " | " |
| | | " | 101 | " | | | | | | | " | | | | | | | " | " | G to 2Y | " | " | " |
| | | " | 102 | " | | | | | | | " | | | | | | | " | " | G to 3Y | " | " | " |
| | | " | 103 | " | | | | | | | " | | | | | | | " | " | G to 4Y | " | " | " |
| | $t_{PHZ3}$ | " | 104 | " | | 5.0 V | OUT | | 5.0 V | OUT | " | OUT | 5.0 V | | OUT | 5.0 V | | " | " | G to 1Y | " | " | " |
| | | " | 105 | " | | | | | | | " | | | | | | | " | " | G to 2Y | " | " | " |
| | | " | 106 | " | | | | | | | " | | | | | | | " | " | G to 3Y | " | " | " |
| | | " | 107 | " | | | | | | | " | | | | | | | " | " | G to 4Y | " | " | " |
| | $t_{PLZ3}$ | " | 108 | GND | GND | | OUT | GND | | OUT | " | OUT | | GND | OUT | | GND | " | " | G to 1Y | " | 30 | " |
| | | " | 109 | " | | | | | | | " | | | | | | | " | " | G to 2Y | " | " | " |
| | | " | 110 | " | | | | | | | " | | | | | | | " | " | G to 3Y | " | " | " |
| | | " | 111 | " | | | | | | | " | | | | | | | " | " | G to 4Y | " | " | " |
| 10 $T_C$ = +125°C | Same tests and terminal conditions as for subgroup 9, except $T_C$ = +125°C and for following limits: $t_{PLH1}$ and $t_{PHL1}$ = 3 to 35 ns; $t_{PLH5}$ and $t_{PHL5}$ = 3 to 39 ns; $t_{PZH3}$, $t_{PZL3}$, and $t_{PHZ3}$ = 3 to 53 ns; $t_{PLZ3}$ = 3 to 45 ns. | | | | | | | | | | | | | | | | | | | | | | |
| 11 | Same tests, terminal conditions, and limits as subgroup 10 except $T_C$ = -55°C. | | | | | | | | | | | | | | | | | | | | | | |

1/ $I_{IL}$ limits shall be as follows:

| Test | Min/Max limits (mA) for circuit A | B | C | D | E | F | G |
|---|---|---|---|---|---|---|---|
| $I_{IL1}$ | -.150/-.380 | -.16/-.40 | -.20/-.44 | -.03/-.30 | -.16/-.40 | -.12/-.36 | 0/-.15 |
| $I_{IL2}$ | 0/-.200 | -.32/-.80 | -.40/-.88 | -.06/-.60 | -.25/-.70 | -.24/-.72 | 0/-.15 |

2/ $I_{OS}$ limits for circuits B, C, D, F, and G are -15 to -100 mA.
3/ Inputs: A ≥ 2.4 V minimum, B ≤ 0.4 V maximum.
Outputs: Output voltages shall be either:
a. H ≥ 2.5 volts minimum and L ≤ 0.4 volt maximum when using a high speed checker double comparator, or
b. H ≥ 1.5 volts and L ≤ 1.5 volts when using a high speed checker single comparator.
c. Attributes data only is required for subgroups 7 and 8.



Source: https://assist.dla.mil -- Downloaded: 2026-02-21T14:05Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 07.
Terminal conditions (pins not designated may be high ≥ 2.0 V; low ≤ 0.7 V; or open).

| Subgroup | Symbol | MIL-STD-883 method | Cases E, F Case 2 Test no. | 1 2 S | 2 3 1A | 3 4 1B | 4 5 1Y | 5 7 2A | 6 8 2B | 7 9 2Y | 8 10 GND | 9 12 3Y | 10 13 3B | 11 14 3A | 12 15 4Y | 13 17 4B | 14 18 4A | 15 19 G | 16 20 $V_{CC}$ | Measured terminal | Limits Min | Limits Max | Unit |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| $T_C$ = +25°C[1] | $V_{OH}$ | 3006 | 1 | 0.7 V | 0.7 V | | -1 mA | | | | GND | | | | | | | 0.7 V | 4.5 V | 1Y | 2.4 | | V |
| | | " | 2 | " | | | | 0.7 V | | -1 mA | " | | | | | | | " | " | 2Y | " | | " |
| | | " | 3 | " | | | | | | | " | -1 mA | | 0.7 V | | | | " | " | 3Y | " | | " |
| | | " | 4 | " | | | | | | | " | | | | -1 mA | | 0.7 V | " | " | 4Y | " | | " |
| | $V_{OL}$ | 3007 | 5 | 2.0 V | | 2.0 V | 12 mA | | | | " | | | | | | | " | " | 1Y | | 0.4 | " |
| | | " | 6 | " | | | | | 2.0 V | 12 mA | " | | | | | | | " | " | 2Y | | " | " |
| | | " | 7 | " | | | | | | | " | 12 mA | 2.0 V | | | | | " | " | 3Y | | " | " |
| | | " | 8 | " | | | | | | | " | | | | 12 mA | 2.0 V | | " | " | 4Y | | " | " |
| | $V_{IC}$ | | 9 | -18 mA | | | | | | | " | | | | | | | | " | S | | -1.5 | " |
| | | | 10 | | -18 mA | | | | | | " | | | | | | | | " | 1A | | " | " |
| | | | 11 | | | -18 mA | | | | | " | | | | | | | | " | 1B | | " | " |
| | | | 12 | | | | | -18 mA | | | " | | | | | | | | " | 2A | | " | " |
| | | | 13 | | | | | | -18 mA | | " | | | | | | | | " | 2B | | " | " |
| | | | 14 | | | | | | | | " | | -18 mA | | | | | | " | 3B | | " | " |
| | | | 15 | | | | | | | | " | | | -18 mA | | | | | " | 3A | | " | " |
| | | | 16 | | | | | | | | " | | | | -18 mA | | | | " | 4B | | " | " |
| | | | 17 | | | | | | | | " | | | | | | -18 mA | | " | 4A | | " | " |
| | | | 18 | | | | | | | | " | | | | | | | -18 mA | " | G | | " | " |
| | $I_{IL1}$ | 3009 | 19 | GND | 0.4 V | | | | | | " | | | | | | | GND | 5.5 V | 1A | 1/ | 1/ | mA |
| | | " | 20 | 5.5 V | | 0.4 V | | | | | " | | | | | | | " | " | 1B | " | " | " |
| | | " | 21 | GND | | | | 0.4 V | | | " | | | | | | | " | " | 2A | " | " | " |
| | | " | 22 | 5.5 V | | | | | 0.4 V | | " | | | | | | | " | " | 2B | " | " | " |
| | | " | 23 | 5.5 V | | | | | | | " | | 0.4 V | | | | | " | " | 3B | " | " | " |
| | | " | 24 | GND | | | | | | | " | | | 0.4 V | | | | " | " | 3A | " | " | " |
| | | " | 25 | 5.5 V | | | | | | | " | | | | 0.4 V | | | " | " | 4B | " | " | " |
| | | " | 26 | GND | | | | | | | " | | | | | 0.4 V | | " | " | 4A | " | " | " |
| | $I_{IL2}$ | " | 27 | | | | | | | | " | | | | | | | 0.4 V | " | G | " | " | " |
| | | " | 28 | 0.4 V | | | | | | | " | | | | | | | | " | S | " | " | " |
| | $I_{IH1}$ | 3010 | 29 | 5.5 V | 2.7 V | | | | | | " | | | | | | | | " | 1A | | 20 | µA |
| | | " | 30 | GND | | 2.7 V | | | | | " | | | | | | | | " | 1B | | " | " |
| | | " | 31 | 5.5 V | | | | 2.7 V | | | " | | | | | | | | " | 2A | | " | " |
| | | " | 32 | GND | | | | | 2.7 V | | " | | | | | | | | " | 2B | | " | " |
| | | " | 33 | GND | | | | | | | " | | 2.7 V | | | | | | " | 3B | | " | " |
| | | " | 34 | 5.5 V | | | | | | | " | | | 2.7 V | | | | | " | 3A | | " | " |
| | | " | 35 | GND | | | | | | | " | | | | 2.7 V | | | | " | 4B | | " | " |
| | | " | 36 | 5.5 V | | | | | | | " | | | | | 2.7 V | | | " | 4A | | " | " |
| | | " | 37 | GND | | | | | | | " | | | | | | 2.7 V | | " | G | | " | " |
| | $I_{IH2}$ | " | 38 | 5.5 V | 7.0 V | | | | | | " | | | | | | | | " | 1A | | 100 | " |
| | | " | 39 | GND | | 7.0 V | | | | | " | | | | | | | | " | 1B | | " | " |
| | | " | 40 | 5.5 V | | | | 7.0 V | | | " | | | | | | | | " | 2A | | " | " |
| | | " | 41 | GND | | | | | 7.0 V | | " | | | | | | | | " | 2B | | " | " |
| | | " | 42 | GND | | | | | | | " | | 7.0 V | | | | | | " | 3B | | " | " |
| | | " | 43 | 5.5 V | | | | | | | " | | | 7.0 V | | | | | " | 3A | | " | " |
| | | " | 44 | GND | | | | | | | " | | | | 7.0 V | | | | " | 4B | | " | " |
| | | " | 45 | 5.5 V | | | | | | | " | | | | | 7.0 V | | | " | 4A | | " | " |
| | | " | 46 | GND | | | | | | | " | | | | | | 7.0 V | | " | G | | " | " |
| | $I_{IH3}$ | " | 47 | 2.7 V | | | | | | | " | | | | | | | | " | S | | 40 | " |

See footnotes at end of device type 07.



Source: https://assist.dla.mil -- Downloaded: 2026-02-21T14:05Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 07 - Continued.
Terminal conditions (pins not designated may be high ≥ 2.0 V; low ≤ 0.7 V; or open).

| Subgroup | Symbol | MIL-STD-883 method | Cases E, F / Case 2 / Test no. | 1 / 2 / S | 2 / 3 / 1A | 3 / 4 / 1B | 4 / 5 / 1Y | 5 / 7 / 2A | 6 / 8 / 2B | 7 / 9 / 2Y | 8 / 10 / GND | 9 / 12 / 3Y | 10 / 13 / 3B | 11 / 14 / 3A | 12 / 15 / 4Y | 13 / 17 / 4B | 14 / 18 / 4A | 15 / 19 / G | 16 / 20 / $V_{CC}$ | Measured terminal | Limits Min | Limits Max | Unit |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1 $T_C$ = +25°C | $I_{IH4}$ | 3010 | 48 | 7.0 V | | | | | | | GND | | | | | | | | 5.5 V | S | | 200 | µA |
| | $I_{OZH}$ | | 49 | 2.0 V | | 2.0 V | 2.7 V | | 2.0 V | 2.7 V | " | | | | | | | 2.0 V | " | 1Y | | 20 | " |
| | | | 50 | " | | | | | | | " | | | | | | | " | " | 2Y | | " | " |
| | | | 51 | " | | | | | | | " | 2.7 V | 2.0 V | | | | | " | " | 3Y | | " | " |
| | | | 52 | " | | | | | | | " | | | 2.7 V | 2.0 V | | | " | " | 4Y | | " | " |
| | $I_{OZL}$ | | 53 | 0.7 V | 0.7 V | | 0.4 V | | | | " | | | | | | | " | " | 1Y | | -20 | " |
| | | | 54 | " | | | | 0.7 V | | 0.4 V | " | | | | | | | " | " | 2Y | | " | " |
| | | | 55 | " | | | | | | | " | 0.4 V | | 0.7 V | | | | " | " | 3Y | | " | " |
| | | | 56 | " | | | | | | | " | | | | | 0.7 V | | " | " | 4Y | | " | " |
| | $I_{OS}$ 2/ | 3011 | 57 | GND | GND | | GND | | | | " | | | | | | | GND | " | 1Y | -30 | -130 | mA |
| | | " | 58 | " | | | | | | | " | | | | | | | " | " | 2Y | " | " | " |
| | | " | 59 | " | | | | GND | | GND | " | GND | | GND | | | | " | " | 3Y | " | " | " |
| | | " | 60 | " | | | | | | | " | | | | | GND | | " | " | 4Y | " | " | " |
| | $I_{CC1}$ | 3005 | 61 | 5.5 V | 5.5 V | 5.5 V | | 5.5 V | 5.5 V | | " | | 5.5 V | 5.5 V | | 5.5 V | 5.5 V | " | " | $V_{CC}$ | | 15.0 | " |
| | $I_{CC2}$ | " | 62 | GND | GND | GND | | GND | GND | | " | | GND | GND | | GND | GND | " | " | $V_{CC}$ | | 9.0 | " |
| | $I_{CC3}$ | " | 63 | | | | | | | | " | | | | | | | 5.5 V | " | $V_{CC}$ | | 19.0 | " |
| 2 | Same tests, terminal conditions, and limits as subgroup 1, except $T_C$ = +125°C and $V_{IC}$ tests are omitted. | | | | | | | | | | | | | | | | | | | | | | |
| 3 | Same tests, terminal conditions, and limits as subgroup 1, except $T_C$ = -55°C and $V_{IC}$ tests are omitted. | | | | | | | | | | | | | | | | | | | | | | |
| 7 $T_C$ = +25°C | Functional tests | 3014 | 64 | B | B | B | H | B | B | H | GND | H | B | B | H | B | B | B | 5.0 V | All outputs | | 3/ | |
| | | " | 65 | " | B | A | H | B | A | H | " | H | A | B | H | A | B | " | " | " | | | |
| | | " | 66 | " | A | " | L | A | " | L | " | L | " | A | L | " | A | " | " | " | | | |
| | | " | 67 | " | B | " | H | B | " | H | " | H | " | B | H | " | B | " | " | " | | | |
| | | " | 68 | A | B | " | L | B | " | L | " | L | " | B | L | " | B | " | " | " | | | |
| | | " | 69 | " | A | " | L | A | " | L | " | L | " | A | L | " | A | " | " | " | | | |
| | | " | 70 | " | A | B | H | A | B | H | " | H | B | A | H | B | A | " | " | " | | | |
| | | " | 71 | " | B | B | H | B | B | H | " | H | B | B | H | B | B | " | " | " | | | |
| 8 | Repeat subgroup 7 tests at $T_C$ = +125°C, and $T_C$ = -55°C. | | | | | | | | | | | | | | | | | | | | | | |
| 9 $T_C$ = +25°C | $t_{PLH1}$ | 3003 (Fig. 5) | 72 | GND | IN | | OUT | | | | GND | | | | | | | GND | 5.0 V | 1A to 1Y | 3 | 23 | ns |
| | | " | 73 | 5.0 V | | IN | OUT | | | | " | | | | | | | " | " | 1B to 1Y | " | " | " |
| | | " | 74 | GND | | | | IN | | | " | | | | | | | " | " | 2A to 2Y | " | " | " |
| | | " | 75 | 5.0 V | | | | | IN | OUT | " | | | | | | | " | " | 2B to 2Y | " | " | " |
| | | " | 76 | 5.0 V | | | | | | OUT | " | OUT | IN | | | | | " | " | 3B to 3Y | " | " | " |
| | | " | 77 | GND | | | | | | | " | OUT | | IN | | | | " | " | 3A to 3Y | " | " | " |
| | | " | 78 | 5.0 V | | | | | | | " | | | | OUT | IN | | " | " | 4B to 4Y | " | " | " |
| | | " | 79 | GND | | | | | | | " | | | | OUT | | IN | " | " | 4A to 4Y | " | " | " |

See footnotes at end of device type 07.



Source: https://assist.dla.mil -- Downloaded: 2026-02-21T14:05Z
Check the source to verify that this is the current version before use.

Group A inspection for device type 07 - Continued.

Terminal conditions (pins not designated may be high ≥ 2.0 V; low ≤ 0.8 V; or open).

| Subgroup | Symbol | MIL-STD-883 method | Cases E, F Case 2 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | Measured terminal | Limits Min | Limits Max | Unit |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | Test no. | S | 1A | 1R | 1Y | 2A | 2B | 2Y | GND | 3Y | 3B | 3A | 4Y | 4B | 4A | G | $V_{CC}$ | | | | |
| 9 $T_C$ = +25°C | $t_{PHL1}$ | 3003 (Fig. 5) | 80 | GND | IN | | OUT | | | | GND | | | | | | | GND | 5.0 V | 1A to 1Y | 3 | 23 | ns |
| | | " | 81 | 5.0 V | | IN | OUT | | | | " | | | | | | | " | " | 1R to 1Y | " | " | " |
| | | " | 82 | GND | | | | IN | | OUT | " | | | | | | | " | " | 2A to 2Y | " | " | " |
| | | " | 83 | 5.0 V | | | | | IN | OUT | " | | | | | | | " | " | 2B to 2Y | " | " | " |
| | | " | 84 | 5.0 V | | | | | | | " | OUT | IN | | | | | " | " | 3B to 3Y | " | " | " |
| | | " | 85 | GND | | | | | | | " | OUT | | IN | | | | " | " | 3A to 3Y | " | " | " |
| | | " | 86 | 5.0 V | | | | | | | " | | | | OUT | IN | | " | " | 4B to 4Y | " | " | " |
| | | " | 87 | GND | | | | | | | " | | | | OUT | | IN | " | " | 4A to 4Y | " | " | " |
| | $t_{PLH5}$ | " | 88 | IN | 5.0 V | GND | OUT | | | | " | | | | | | | " | " | S to 1Y | " | 26 | " |
| | | " | 89 | " | | | | 5.0 V | GND | OUT | " | | | | | | | " | " | S to 2Y | " | " | " |
| | | " | 90 | " | | | | | | | " | OUT | GND | 5.0 V | | | | " | " | S to 3Y | " | " | " |
| | | " | 91 | " | | | | | | | " | | | | OUT | GND | 5.0 V | " | " | S to 4Y | " | " | " |
| | $t_{PHL5}$ | " | 92 | " | GND | 5.0 V | OUT | | | | " | | | | | | | " | " | S to 1Y | " | " | " |
| | | " | 93 | " | | | | GND | 5.0 V | OUT | " | | | | | | | " | " | S to 2Y | " | " | " |
| | | " | 94 | " | | | | | | | " | OUT | 5.0 V | GND | | | | " | " | S to 3Y | " | " | " |
| | | " | 95 | " | | | | | | | " | | | | OUT | 5.0 V | GND | " | " | S to 4Y | " | " | " |
| | $t_{PZH3}$ | (Fig. 5) | 96 | GND | GND | | OUT | | | | " | | | | | | | IN | " | G to 1Y | " | 35 | " |
| | | " | 97 | " | | | | GND | | OUT | " | | | | | | | " | " | G to 2Y | " | " | " |
| | | " | 98 | " | | | | | | | " | OUT | | GND | | | | " | " | G to 3Y | " | " | " |
| | | " | 99 | " | | | | | | | " | | | | OUT | | GND | " | " | G to 4Y | " | " | " |
| | $t_{PZL3}$ | " | 100 | 5.0 V | | 5.0 V | OUT | | | | " | | | | | | | " | " | G to 1Y | " | " | " |
| | | " | 101 | " | | | | | 5.0 V | OUT | " | | | | | | | " | " | G to 2Y | " | " | " |
| | | " | 102 | " | | | | | | | " | OUT | 5.0 V | | | | | " | " | G to 3Y | " | " | " |
| | | " | 103 | " | | | | | | | " | | | | OUT | 5.0 V | | " | " | G to 4Y | " | " | " |
| | $t_{PHZ3}$ | " | 104 | GND | GND | | OUT | | | | " | | | | | | | " | " | G to 1Y | " | " | " |
| | | " | 105 | " | | | | GND | | OUT | " | | | | | | | " | " | G to 2Y | " | " | " |
| | | " | 106 | " | | | | | | | " | OUT | | GND | | | | " | " | G to 3Y | " | " | " |
| | | " | 107 | " | | | | | | | " | | | | OUT | | GND | " | " | G to 4Y | " | " | " |
| | $t_{PLZ3}$ | " | 108 | 5.0 V | | 5.0 V | OUT | | | | " | | | | | | | " | " | G to 1Y | " | 30 | " |
| | | " | 109 | " | | | | | 5.0 V | OUT | " | | | | | | | " | " | G to 2Y | " | " | " |
| | | " | 110 | " | | | | | | | " | OUT | 5.0 V | | | | | " | " | G to 3Y | " | " | " |
| | | " | 111 | " | | | | | | | " | | | | OUT | 5.0 V | | " | " | G to 4Y | " | " | " |
| 10 $T_C$ = +125°C | Same tests and terminal conditions as for subgroup 9, except $T_C$ = +125°C and limits as follows: $t_{PLH1}$ = 3 to 18 ns; $t_{PHL1}$ = 3 to 26 ns; $t_{PLH5}$ = 3 to 32 ns; $t_{PHL5}$ = 3 to 36 ns; $t_{PZH3}$, $t_{PZL3}$, and $t_{PHZ3}$ = 3 to 53 ns; $t_{PLZ3}$ = 3 to 45 ns. | | | | | | | | | | | | | | | | | | | | | | |
| 11 | Same tests, terminal conditions, and limits as subgroup 10 except $T_C$ = -55°C. | | | | | | | | | | | | | | | | | | | | | | |

1/ $I_{IL}$ limits shall be as follows:

| Test | Min/Max limits (mA) for circuit A | B | C | D | E | F | G |
|---|---|---|---|---|---|---|---|
| $I_{IL1}$ | -.150/-.380 | -.157/-.40 | -.207/-.44 | -.103/-.30 | -.167/-.40 | -.127/-.36 | 0/-.15 |
| $I_{IL2}$ | 0/.200 | -.327/-.80 | -.327/-.80 | -.067/-.60 | -.257/-.76 | -.247/-.72 | 0/-.15 |

2/ $I_{OS}$ limits for circuits B, D, F, and G are -15 to -100 mA.

3/ Inputs: A ≥ 2.4 V minimum, B ≤ 0.4 V maximum.
Outputs: Output voltages shall be either:
a. H = 2.5 volts minimum and L = 0.4 volt maximum when using a high speed checker double comparator, or
b. H ≥ 1.5 volts and L ≤ 1.5 volts when using a high speed checker single comparator.
c. Attributes data only is required for subgroups 7 and 8.



Source: https://assist.dla.mil -- Downloaded: 2026-02-21T14:05Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 08.
Terminal conditions (pins not designated may be high ≥ 2.0 V; low ≤ 0.7 V; or open).

| Subgroup | Symbol | MIL-STD-883 method | Cases E, F / Case 2 / Test no. | 1 / 2 / 1G | 2 / 3 / B | 3 / 4 / 1C3 | 4 / 5 / 1C2 | 5 / 7 / 1C1 | 6 / 8 / 1C0 | 7 / 9 / 1Y | 8 / 10 / GND | 9 / 12 / 2Y | 10 / 13 / 2C0 | 11 / 14 / 2C1 | 12 / 15 / 2C2 | 13 / 17 / 2C3 | 14 / 18 / A | 15 / 19 / 2G | 16 / 20 / $V_{CC}$ | Measured terminal | Limits Min | Limits Max | Unit |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1 $T_C$ = +25°C | $V_{OH}$ | 3006 | 1 | 0.7 V | 0.7 V | | | | 2.0 V | -1 mA | GND | -1 mA | 2.0 V | | | | 0.7 V | | 4.5 V | 1Y | 2.4 | | V |
| | | 3006 | 2 | | 0.7 V | | | | | | " | | | | | | 0.7 V | 0.7 V | " | 2Y | 2.4 | | " |
| | $V_{OL}$ | 3007 | 3 | 0.7 V | 2.0 V | 0.7 V | | | | 4 mA | " | 4 mA | | | | 0.7 V | 2.0 V | | " | 1Y | | 0.4 | " |
| | | 3007 | 4 | | 2.0 V | | | | | | " | | | | | | 2.0 V | 0.7 V | " | 2Y | | 0.4 | " |
| | $V_{IC}$ | | 5 | -18 mA | -18 mA | -18 mA | -18 mA | -18 mA | -18 mA | | " | | -18 mA | -18 mA | -18 mA | -18 mA | -18 mA | -18 mA | " | 1G | | -1.5 | " |
| | | | 6 | | | | | | | | " | | | | | | | | " | B | | " | " |
| | | | 7 | | | | | | | | " | | | | | | | | " | 1C3 | | " | " |
| | | | 8 | | | | | | | | " | | | | | | | | " | 1C2 | | " | " |
| | | | 9 | | | | | | | | " | | | | | | | | " | 1C1 | | " | " |
| | | | 10 | | | | | | | | " | | | | | | | | " | 1C0 | | " | " |
| | | | 11 | | | | | | | | " | | | | | | | | " | 2C0 | | " | " |
| | | | 12 | | | | | | | | " | | | | | | | | " | 2C1 | | " | " |
| | | | 13 | | | | | | | | " | | | | | | | | " | 2C2 | | " | " |
| | | | 14 | | | | | | | | " | | | | | | | | " | 2C3 | | " | " |
| | | | 15 | | | | | | | | " | | | | | | | | " | A | | " | " |
| | | | 16 | | | | | | | | " | | | | | | | | " | 2G | | " | " |
| | $I_{ILI}$ | 3009 | 17 | 0.4 V | 0.4 V | 0.4 V | 0.4 V | 0.4 V | 0.4 V | | " | | 0.4 V | 0.4 V | 0.4 V | 0.4 V | 5.5 V | GND | 5.5 V | 1G | 1/ | 1/ | mA |
| | | " | 18 | | 5.5 V | | | | | | " | | | | | | GND | | " | B | " | " | " |
| | | " | 19 | GND | 5.5 V | | | | | | " | | | | | | 5.5 V | | " | 1C3 | " | " | " |
| | | " | 20 | " | GND | | | | | | " | | | | | | GND | | " | 1C2 | " | " | " |
| | | " | 21 | " | " | | | | | | " | | | | | | GND | | " | 1C1 | " | " | " |
| | | " | 22 | | " | | | | | | " | | | | | | 5.5 V | | " | 1C0 | " | " | " |
| | | " | 23 | | " | | | | | | " | | | | | | GND | | " | 2C0 | " | " | " |
| | | " | 24 | | " | | | | | | " | | | | | | GND | | " | 2C1 | " | " | " |
| | | " | 25 | | 5.5 V | | | | | | " | | | | | | 5.5 V | | " | 2C2 | " | " | " |
| | | " | 26 | | 5.5 V | | | | | | " | | | | | | GND | | " | 2C3 | " | " | " |
| | | " | 27 | | | | | | | | " | | | | | | 5.5 V | | " | A | " | " | " |
| | | " | 28 | | | | | | | | " | | | | | | 0.4 V | 0.4 V | " | 2G | " | " | " |
| | $I_{IH1}$ | 3010 | 29 | 2.7 V | 2.7 V | 2.7 V | 2.7 V | 2.7 V | 2.7 V | | " | | 2.7 V | 2.7 V | 2.7 V | 2.7 V | GND | 2.7 V | " | 1G | | 20 | uA |
| | | " | 30 | | GND | | | | | | " | | | | | | 5.5 V | | " | B | | " | " |
| | | " | 31 | | GND | | | | | | " | | | | | | GND | | " | 1C3 | | " | " |
| | | " | 32 | | 5.5 V | | | | | | " | | | | | | 5.5 V | | " | 1C2 | | " | " |
| | | " | 33 | | " | | | | | | " | | | | | | 5.5 V | | " | 1C1 | | " | " |
| | | " | 34 | | " | | | | | | " | | | | | | GND | | " | 1C0 | | " | " |
| | | " | 35 | | " | | | | | | " | | | | | | 5.5 V | | " | 2C0 | | " | " |
| | | " | 36 | | " | | | | | | " | | | | | | GND | | " | 2C1 | | " | " |
| | | " | 37 | | GND | | | | | | " | | | | | | 5.5 V | | " | 2C2 | | " | " |
| | | " | 38 | | GND | | | | | | " | | | | | | GND | | " | 2C3 | | " | " |
| | | " | 39 | | | | | | | | " | | | | | | 2.7 V | | " | A | | " | " |
| | | " | 40 | | | | | | | | " | | | | | | | 2.7 V | " | 2G | | " | " |
| | $I_{IH2}$ | " | 41 | 7.0 V | 7.0 V | 7.0 V | 7.0 V | 7.0 V | 7.0 V | | " | | 7.0 V | 7.0 V | 7.0 V | 7.0 V | GND | 7.0 V | " | 1G | | 100 | " |
| | | " | 42 | | GND | | | | | | " | | | | | | 5.5 V | | " | B | | " | " |
| | | " | 43 | | GND | | | | | | " | | | | | | GND | | " | 1C3 | | " | " |
| | | " | 44 | | 5.5 V | | | | | | " | | | | | | 5.5 V | | " | 1C2 | | " | " |
| | | " | 45 | | " | | | | | | " | | | | | | 5.5 V | | " | 1C1 | | " | " |
| | | " | 46 | | " | | | | | | " | | | | | | GND | | " | 1C0 | | " | " |
| | | " | 47 | | " | | | | | | " | | | | | | 5.5 V | | " | 2C0 | | " | " |
| | | " | 48 | | " | | | | | | " | | | | | | GND | | " | 2C1 | | " | " |
| | | " | 49 | | GND | | | | | | " | | | | | | 5.5 V | | " | 2C2 | | " | " |
| | | " | 50 | | GND | | | | | | " | | | | | | GND | | " | 2C3 | | " | " |
| | | " | 51 | | | | | | | | " | | | | | | 7.0 V | | " | A | | " | " |
| | | " | 52 | | | | | | | | " | | | | | | | 7.0 V | " | 2G | | " | " |

See footnotes at end of device type 08.



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:05Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 08 - Continued.
Terminal conditions (pins not designated may be high ≥ 2.0 V; low ≤ 0.7 V; or open).

| Subgroup | Symbol | MIL-STD-883 method | Cases E, F | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | Measured terminal | Limits | | Unit |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | Case 2 | 2 | 3 | 4 | 5 | 7 | 8 | 9 | 10 | 12 | 13 | 14 | 15 | 17 | 18 | 19 | 20 | | Min | Max | |
| | | | Test no. | 1G | B | 1C3 | 1C2 | 1C1 | 1C0 | 1Y | GND | 2Y | 2C0 | 2C1 | 2C2 | 2C3 | A | 2G | $V_{CC}$ | | | | |
| 1 $T_C$ = +25°C | $I_{OZH}$ | | 53 | 2.0 V | 0.7 V | | | | 0.7 V | 2.7 V | GND | | | | | | 0.7 V | | 5.5 V | 1Y | | 20 | µA |
| | | | 54 | | 0.7 V | | | | | | " | 2.7 V | 0.7 V | | | | 0.7 V | 2.0 V | " | 2Y | | 20 | " |
| | $I_{OZL}$ | | 55 | 2.0 V | 2.0 V | 2.0 V | | | | 0.4 V | " | | | | | | 2.0 V | | " | 1Y | | -20 | " |
| | | | 56 | | 2.0 V | | | | | | " | 0.4 V | | | | 2.0 V | 2.0 V | 2.0 V | " | 2Y | | -20 | " |
| | $I_{OS}$ 2/ | 3011 | 57 | GND | GND | | | | 5.5 V | GND | " | | | | | | GND | | " | 1Y | -30 | -130 | mA |
| | | 3011 | 58 | | " | | | | | | " | GND | 5.5 V | | | | " | GND | " | 2Y | -30 | -130 | " |
| | $I_{CC1}$ | 3005 | 59 | GND | " | GND | GND | GND | GND | | " | | GND | GND | GND | GND | " | GND | " | $V_{CC}$ | --- | 12.0 | " |
| | $I_{CC2}$ | 3005 | 60 | 5.5 V | " | GND | GND | GND | GND | | " | | GND | GND | GND | GND | " | 5.5 V | " | $V_{CC}$ | --- | 14.0 | " |
| 2 | Same tests, terminal conditions, and limits as subgroup 1 except $T_C$ = +125°C and $V_{IC}$ tests are omitted. | | | | | | | | | | | | | | | | | | | | | | |
| 3 | Same tests, terminal conditions, and limits as subgroup 1 except $T_C$ = -55°C and $V_{IC}$ tests are omitted. | | | | | | | | | | | | | | | | | | | | | | |
| 7 $T_C$ = +25°C | Functional tests | 3014 | 61 | B | B | A | A | A | B | L | GND | L | B | A | A | A | D | B | 5.0 V | All outputs | | | |
| | | " | 62 | " | " | B | B | B | B | L | " | L | B | B | B | B | " | " | " | " | | | |
| | | " | 63 | " | " | " | " | " | A | H | " | H | A | " | " | " | " | " | " | " | | | |
| | | " | 64 | " | " | " | " | " | " | L | " | L | " | " | " | " | A | " | " | " | | | |
| | | " | 65 | " | " | " | " | A | " | H | " | H | " | A | " | " | A | " | " | " | | 3/ | |
| | | " | 66 | " | " | " | " | " | " | H | " | H | " | " | " | " | B | " | " | " | | | |
| | | " | 67 | " | A | " | " | " | " | L | " | L | " | " | " | " | " | " | " | " | | | |
| | | " | 68 | " | " | " | A | " | " | H | " | H | " | " | A | " | " | " | " | " | | | |
| | | " | 69 | " | " | " | " | " | " | L | " | L | " | " | " | " | A | " | " | " | | | |
| | | " | 70 | " | " | A | " | " | " | H | " | H | " | " | " | A | A | " | " | " | | | |
| 8 | Repeat subgroup 7 tests at $T_C$ = +125°C and $T_C$ = -55°C. | | | | | | | | | | | | | | | | | | | | | | |
| 9 $T_C$ = +25°C | $t_{PLH1}$ | 3003 (Fig. 5) | 71 | GND | GND | | | | IN | OUT | GND | | | | | | GND | | 5.0 V | 1C0 to 1Y | 3 | 30 | ns |
| | | " | 72 | " | GND | | | IN | | " | " | | | | | | 5.0 V | | " | 1C1 to 1Y | " | " | " |
| | | " | 73 | " | 5.0 V | | IN | | | " | " | | | | | | GND | | " | 1C2 to 1Y | " | " | " |
| | | " | 74 | " | 5.0 V | IN | | | | " | " | | | | | | 5.0 V | | " | 1C3 to 1Y | " | " | " |
| | | " | 75 | | GND | | | | | | " | OUT | IN | | | | GND | GND | " | 2C0 to 2Y | " | " | " |
| | | " | 76 | | GND | | | | | | " | " | | IN | | | 5.0 V | " | " | 2C1 to 2Y | " | " | " |
| | | " | 77 | | 5.0 V | | | | | | " | " | | | IN | | GND | " | " | 2C2 to 2Y | " | " | " |
| | | " | 78 | | 5.0 V | | | | | | " | " | | | | IN | 5.0 V | " | " | 2C3 to 2Y | " | " | " |
| | $t_{PHL1}$ | " | 79 | GND | GND | | | | IN | OUT | " | | | | | | GND | | " | 1C0 to 1Y | " | 25 | " |
| | | " | 80 | " | GND | | | IN | | | " | | | | | | 5.0 V | | " | 1C1 to 1Y | " | " | " |
| | | " | 81 | " | 5.0 V | | IN | | | | " | | | | | | GND | | " | 1C2 to 1Y | " | " | " |
| | | " | 82 | " | 5.0 V | IN | | | | OUT | " | | | | | | 5.0 V | | " | 1C3 to 1Y | " | " | " |
| | | " | 83 | | GND | | | | | | " | OUT | IN | | | | GND | GND | " | 2C0 to 2Y | " | " | " |
| | | " | 84 | | GND | | | | | | " | " | | IN | | | 5.0 V | " | " | 2C1 to 2Y | " | " | " |
| | | " | 85 | | 5.0 V | | | | | | " | " | | | IN | | GND | " | " | 2C2 to 2Y | " | " | " |
| | | " | 86 | | 5.0 V | | | | | | " | " | | | | IN | 5.0 V | " | " | 2C3 to 2Y | " | " | " |

See footnotes at end of device type 08.



Source: https://assist.dla.mil -- Downloaded: 2026-02-21T14:05Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 08 - Continued.
Terminal conditions (pins not designated may be high ≥ 2.0 V; low ≤ 0.7 V; or open).

| Subgroup | Symbol | MIL-STD-883 method | Cases E, F / Case 2 / Test no. | 1 / 2 / 1G | 2 / 3 / B | 3 / 4 / 1C3 | 4 / 5 / 1C2 | 5 / 7 / 1C1 | 6 / 8 / 1C0 | 7 / 9 / 1Y | 8 / 10 / GND | 9 / 12 / 2Y | 10 / 13 / 2C0 | 11 / 14 / 2C1 | 12 / 15 / 2C2 | 13 / 17 / 2C3 | 14 / 18 / A | 15 / 19 / 2G | 16 / 20 / $V_{CC}$ | Measured terminal | Limits Min | Limits Max | Unit |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 9 $T_C$ = +25°C | $t_{PLH5}$ | 3003 (Fig. 5) | 87 | GND | GND | | | 5.0 V | GND | OUT | GND | | | | | | IN | | 5.0 V | A to 1Y | 3 | 50 | ns |
| | | " | 88 | | GND | | | | | | " | OUT | GND | 5.0 V | | | IN | GND | " | A to 2Y | " | " | " |
| | | " | 89 | GND | IN | | 5.0 V | | GND | OUT | " | | | | | | GND | | " | B to 1Y | " | " | " |
| | | " | 90 | | IN | | | | | | " | OUT | GND | | 5.0 V | | GND | GND | " | B to 2Y | " | " | " |
| | $t_{PHL5}$ | " | 91 | GND | GND | | | GND | 5.0 V | OUT | " | | | | | | IN | | " | A to 1Y | " | 37 | " |
| | | " | 92 | | GND | | | | | | " | OUT | 5.0 V | GND | | | IN | GND | " | A to 2Y | " | " | " |
| | | " | 93 | GND | IN | | GND | | 5.0 V | OUT | " | | | | | | GND | | " | B to 1Y | " | " | " |
| | | " | 94 | | IN | | | | | | " | OUT | 5.0 V | | GND | | GND | GND | " | B to 2Y | " | " | " |
| | $t_{PZH3}$ | (Fig. 5) | 95 | IN | 5.0 V | 5.0 V | | | | OUT | " | | | | | | 5.0 V | | " | 1G to 1Y | " | 46 | " |
| | | | 96 | | 5.0 V | | | | | | " | OUT | | | | 5.0 V | 5.0 V | IN | " | 2G to 2Y | " | 46 | " |
| | $t_{PZL3}$ | " | 97 | IN | GND | | | | GND | OUT | " | | | | | | GND | | " | 1G to 1Y | " | 28 | " |
| | | " | 98 | | GND | | | | | | " | OUT | GND | | | | GND | IN | " | 2G to 2Y | " | 28 | " |
| | $t_{PHZ3}$ | " | 99 | IN | 5.0 V | 5.0 V | | | | OUT | " | | | | | | 5.0 V | | " | 1G to 1Y | " | 46 | " |
| | | " | 100 | | 5.0 V | | | | | | " | OUT | | | | 5.0 V | 5.0 V | IN | " | 2G to 2Y | " | 46 | " |
| | $t_{PLZ3}$ | " | 101 | IN | GND | | | | GND | OUT | " | | | | | | GND | | " | 1G to 1Y | " | 32 | " |
| | | " | 102 | | GND | | | | | | " | OUT | GND | | | | GND | IN | " | 2G to 2Y | " | 32 | " |
| 10 $T_C$ = +125°C | Same tests and terminal conditions as subgroup 9, except $T_C$ = +125°C and limits as follows: $t_{PLH1}$ = 3 to 45 ns; $t_{PHL1}$ = 3 to 38 ns; $t_{PLH5}$ = 3 to 75 ns; $t_{PHL5}$ = 3 to 56 ns; $t_{PZH3}$ = 3 to 69 ns; $t_{PZL3}$ = 3 to 42 ns; $t_{PHZ3}$ = 3 to 69 ns; $t_{PLZ3}$ = 3 to 48 ns. | | | | | | | | | | | | | | | | | | | | | | |
| 11 | Same tests, terminal conditions, and limits as subgroup 10 except $T_C$ = -55°C. | | | | | | | | | | | | | | | | | | | | | | |

1/ $I_{IL}$ limits shall be as follows:

| Test | Min/Max limits (mA) for circuit A | B | C | D | E | F | G |
|---|---|---|---|---|---|---|---|
| $I_{IL1}$ | 18 through 27 -.12/-.36 except test 28 and 17 -.001/-.15 | -.12/-.36 | -.12/-.36 | -.03/-.30 | Test 18 and 27 -.12/-.36 Test 17 and 28 -.16/-.40 Tests 19 through 26 -.16/-.40 | -.12/-.36 | 0/-.15 |

2/ $I_{OS}$ limits for circuits B, D, E, F, and G are -15 to -100 mA.

3/ Inputs: A ≥ 2.4 V minimum, B ≤ 0.4 V maximum.
Outputs: Output voltages shall be either.
a. H = 2.5 volts minimum and L = 0.4 volt maximum when using a high speed checker double comparator, or
b. H ≥ 1.5 volts and L ≤ 1.5 volts when using a high speed checker single comparator.
c. Attributes data only is required for subgroups 7 and 8.



Source: https://assist.dla.mil -- Downloaded: 2026-02-21T14:05Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 09.
Terminal conditions (pins not designated may be high ≥ 2.0 V; low ≤ 0.7 V; or open).

| Subgroup | Symbol | MIL-STD-883 method | Cases E, F Case 2 Test no. | 1 B2 | 2 A2 | 3 A1 | 4 B1 | 5 C2 | 6 D2 | 7 D1 | 8 GND | 9 C1 | 10 WS | 11 $\overline{CP}$ | 12 QD | 13 QC | 14 QB | 15 QA | 16 $V_{CC}$ | Measured terminal | Limits Min | Limits Max | Unit |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1 $T_C$ = +25°C | $V_{OH}$ | 3006 | 1 | | 2.0 V | | | | | | GND | | 2.0 V | 1/ | | | | .4 mA | 4.5 V | QA | 2.5 | | V |
| | | " | 2 | 2.0 V | | | | | | | " | | " | " | | | -.4 mA | | " | QB | " | | " |
| | | " | 3 | | | | | 2.0 V | | | " | | " | " | -.4 mA | | | | " | QC | " | | " |
| | | " | 4 | | | | | | 2.0 V | | " | | " | " | | -.4 mA | | | " | QD | " | | " |
| | $V_{OL}$ | 3007 | 5 | | 0.7 V | | | | | | " | | " | " | | | | 4.0 mA | " | QA | | 0.4 | " |
| | | " | 6 | 0.7 V | | | | | | | " | | " | " | | | 4.0 mA | | " | QB | | " | " |
| | | " | 7 | | | | | 0.7 V | | | " | | " | " | | 4.0 mA | | | " | QC | | " | " |
| | | " | 8 | | | | | | 0.7 V | | " | | " | " | 4.0 mA | | | | " | QD | | " | " |
| | $V_{IC}$ | | 9 | -18 mA | | | | | | | " | | | | | | | | " | B2 | | -1.5 | " |
| | | | 10 | | -18 mA | | | | | | " | | | | | | | | " | A2 | | " | " |
| | | | 11 | | | -18 mA | | | | | " | | | | | | | | " | A1 | | " | " |
| | | | 12 | | | | -18 mA | | | | " | | | | | | | | " | B1 | | " | " |
| | | | 13 | | | | | -18 mA | | | " | | | | | | | | " | C2 | | " | " |
| | | | 14 | | | | | | -18 mA | | " | | | | | | | | " | D2 | | " | " |
| | | | 15 | | | | | | | -18 mA | " | | | | | | | | " | D1 | | " | " |
| | | | 16 | | | | | | | | " | -18 mA | | | | | | | " | C1 | | " | " |
| | | | 17 | | | | | | | | " | | -18 mA | | | | | | " | WS | | " | " |
| | | | 18 | | | | | | | | " | | | -18 mA | | | | | " | $\overline{CP}$ | | " | " |
| | $I_{IL1}$ | 3009 | 19 | 0.4 V | | | | | | | " | | 5.5 V | | | | | | 5.5 V | B2 | 2/ | 2/ | µA |
| | | " | 20 | | 0.4 V | | | | | | " | | 5.5 V | | | | | | " | A2 | " | " | " |
| | | " | 21 | | | 0.4 V | | | | | " | | GND | | | | | | " | A1 | " | " | " |
| | | " | 22 | | | | 0.4 V | | | | " | | GND | | | | | | " | B1 | " | " | " |
| | | " | 23 | | | | | 0.4 V | | | " | | 5.5 V | | | | | | " | C2 | " | " | " |
| | | " | 24 | | | | | | 0.4 V | | " | | 5.5 V | | | | | | " | D2 | " | " | " |
| | | " | 25 | | | | | | | 0.4 V | " | | GND | | | | | | " | D1 | " | " | " |
| | | " | 26 | | | | | | | | " | 0.4 V | GND | | | | | | " | C1 | " | " | " |
| | | " | 27 | | | | | | | | " | | 0.4 V | | | | | | " | WS | " | " | " |
| | | " | 28 | | | | | | | | " | | | 0.4 V | | | | | " | $\overline{CP}$ | " | " | " |
| | $I_{IH1}$ | 3010 | 29 | 2.7 V | | | | | | | " | | GND | | | | | | " | B2 | | 20 | " |
| | | " | 30 | | 2.7 V | | | | | | " | | GND | | | | | | " | A2 | | " | " |
| | | " | 31 | | | 2.7 V | | | | | " | | 5.5 V | | | | | | " | A1 | | " | " |
| | | " | 32 | | | | 2.7 V | | | | " | | 5.5 V | | | | | | " | B1 | | " | " |
| | | " | 33 | | | | | 2.7 V | | | " | | GND | | | | | | " | C2 | | " | " |
| | | " | 34 | | | | | | 2.7 V | | " | | GND | | | | | | " | D2 | | " | " |
| | | " | 35 | | | | | | | 2.7 V | " | | 5.5 V | | | | | | " | D1 | | " | " |
| | | " | 36 | | | | | | | | " | 2.7 V | 5.5 V | | | | | | " | C1 | | " | " |
| | | " | 37 | | | | | | | | " | | 2.7 V | | | | | | " | WS | | " | " |
| | | " | 38 | | | | | | | | " | | | 2.7 V | | | | | " | $\overline{CP}$ | | " | " |
| | $I_{IH2}$ | " | 39 | 5.5 V | | | | | | | " | | GND | | | | | | " | B2 | | 100 | " |
| | | " | 40 | | 5.5 V | | | | | | " | | GND | | | | | | " | A2 | | " | " |
| | | " | 41 | | | 5.5 V | | | | | " | | 5.5 V | | | | | | " | A1 | | " | " |
| | | " | 42 | | | | 5.5 V | | | | " | | 5.5 V | | | | | | " | B1 | | " | " |
| | | " | 43 | | | | | 5.5 V | | | " | | GND | | | | | | " | C2 | | " | " |
| | | " | 44 | | | | | | 5.5 V | | " | | GND | | | | | | " | D2 | | " | " |
| | | " | 45 | | | | | | | 5.5 V | " | | 5.5 V | | | | | | " | D1 | | " | " |
| | | " | 46 | | | | | | | | " | 5.5 V | " | | | | | | " | C1 | | " | " |
| | | " | 47 | | | | | | | | " | | " | | | | | | " | WS | | " | " |
| | | " | 48 | | | | | | | | " | | | 5.5 V | | | | | " | $\overline{CP}$ | | " | " |

See footnotes at end of device type 09.



Source: https://assist.dla.mil -- Downloaded: 2026-02-21T14:05Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 09 - Continued.
Terminal conditions (pins not designated may be high ≥ 2.0 V; low ≤ 0.7 V; or open).

| Subgroup | Symbol | MIL-STD-883 method | Cases E, F Case 2 Test no. | 1 2 B2 | 2 3 A2 | 3 4 A1 | 4 5 B1 | 5 7 C2 | 6 8 D2 | 7 9 D1 | 8 10 GND | 9 12 C1 | 10 13 WS | 11 14 $\overline{CP}$ | 12 15 QD | 13 17 QC | 14 18 QB | 15 19 QA | 16 20 $V_{CC}$ | Measured terminal | Limits Min | Limits Max | Unit |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1 $T_C$ = +25°C | $I_{OS}$ | 3011 | 49 | | | 5.5 V | 5.5 V | | | | GND | | GND | 1/ | | | | | 5.5 V | QA | -15 | -100 | mA |
| | | " | 50 | | | | | | | | " | | " | " | | | | | " | QB | " | " | " |
| | | " | 51 | | | | | | | | " | 5.5 V | " | " | GND | GND | GND | | " | QC | " | " | " |
| | | " | 52 | | | | | | | 5.5 V | " | | " | | | | | | " | QD | " | " | " |
| | $I_{CC1}$ | 3005 | 53 | GND | GND | GND | GND | GND | GND | GND | " | GND | " | 3/ | | | | | " | $V_{CC}$ | | 21 | " |
| 2 | Same tests, terminal conditions, and limits as subgroup 1 except $T_C$ = +125°C and $V_{IC}$ tests are omitted. | | | | | | | | | | | | | | | | | | | | | | |
| 3 | Same tests, terminal conditions, and limits as subgroup 1 except $T_C$ = -55°C and $V_{IC}$ tests are omitted. | | | | | | | | | | | | | | | | | | | | | | |
| 7 $T_C$ = +25°C | Functional tests | 3014 | 54 | A | A | B | B | A | A | B | GND | D | B | A | L | L | L | L | 5.0 V | All outputs | 4/ | | |
| | | " | 55 | " | " | " | " | " | " | " | " | " | " | B | " | " | " | " | " | " | | | |
| | | " | 56 | " | " | " | " | " | " | " | " | " | " | A | " | " | " | " | " | " | | | |
| | | " | 57 | " | " | A | A | " | " | A | " | A | " | A | H | H | H | H | " | " | | | |
| | | " | 58 | " | " | " | " | " | " | " | " | " | " | B | " | " | " | " | " | " | | | |
| | | " | 59 | " | " | " | " | " | " | " | " | " | " | A | " | " | " | " | " | " | | | |
| | | " | 60 | " | " | B | B | " | " | B | " | B | " | B | " | " | " | " | " | " | | | |
| | | " | 61 | " | " | B | B | " | " | B | " | B | " | A | L | L | L | L | " | " | | | |
| | | " | 62 | " | " | A | A | " | " | A | " | A | " | B | " | " | " | " | " | " | | | |
| | | " | 63 | " | " | B | B | " | " | B | " | B | " | A | " | " | " | " | " | " | | | |
| | | " | 64 | " | " | " | " | " | " | " | " | " | " | B | " | " | " | " | " | " | | | |
| | | " | 65 | " | " | " | " | " | " | " | " | " | A | A | " | " | " | " | " | " | | | |
| | | " | 66 | " | " | A | A | " | " | A | " | A | " | B | H | H | H | H | " | " | | | |
| | | " | 67 | " | " | " | " | " | " | " | " | " | " | A | " | " | " | " | " | " | | | |
| | | " | 68 | " | " | " | " | " | " | " | " | " | " | A | " | " | " | " | " | " | | | |
| | | " | 69 | B | B | " | " | B | B | " | " | " | " | B | L | L | L | L | " | " | | | |
| | | " | 70 | B | B | " | " | B | B | " | " | " | " | " | " | " | " | " | " | " | | | |
| | | " | 71 | A | A | " | " | A | A | " | " | " | " | " | " | " | " | " | " | " | | | |
| | | " | 72 | B | B | " | " | B | B | " | " | " | " | " | " | " | " | " | " | " | | | |
| 8 | Repeat subgroup 7 tests at $T_C$ = +125°C and $T_C$ = -55°C. | | | | | | | | | | | | | | | | | | | | | | |
| 9 $T_C$ = +25°C | $t_{PLH1}$ | 3003 (Fig. 5) | 73 | IN | IN | | | IN | IN | | GND | | 5.5 V | IN | OUT | OUT | OUT | OUT | 5.5 V | $\overline{CP}$ to QA | 3 | 33 | ns |
| | | " | 74 | | | | | | | | " | | " | " | | | | | " | $\overline{CP}$ to QB | " | " | " |
| | | | 75 | | | | | | | | " | | " | " | | | | | " | $\overline{CP}$ to QC | " | " | " |
| | | | 76 | | | | | | | | " | | " | " | | | | | " | $\overline{CP}$ to QD | " | " | " |
| | $t_{PHL1}$ | " | 77 | IN | IN | | | IN | IN | | " | | " | " | OUT | OUT | OUT | OUT | " | $\overline{CP}$ to QA | " | 37 | " |
| | | " | 78 | | | | | | | | " | | " | " | | | | | " | $\overline{CP}$ to QB | " | " | " |
| | | " | 79 | | | | | | | | " | | " | " | | | | | " | $\overline{CP}$ to QC | " | " | " |
| | | " | 80 | | | | | | | | " | | " | " | | | | | " | $\overline{CP}$ to QD | " | " | " |
| 10 $T_C$ = +125°C | Same tests and terminal conditions as subgroup 9 except $T_C$ = +125°C and limits as follows: $t_{PLH1}$ = 3 to 43 ns; $t_{PHL1}$ = 3 to 48 ns. | | | | | | | | | | | | | | | | | | | | | | |
| 11 | Same tests, terminal conditions, and limits as subgroup 10, except $T_C$ = -55°C. | | | | | | | | | | | | | | | | | | | | | | |

1/ Apply normal clock pulse.
2/ $I_{IL}$ limits shall be as follows:

| Test | Min/Max limits (mA) for circuit A | B | C | D | E | F | G |
|---|---|---|---|---|---|---|---|
| $I_{IL1}$ | -.16/-.40 | - | - | -.16/-.40 except -.03/-.30 test 27 and 28 | -.16/-.40 except -.12/-.36 test 27 and 28 | -.12/-.36 | - |

3/ Apply ≥ 3.0 V pulse, then ground, then measure.
4/ Inputs: A ≥ 2.5 V minimum, B ≤ 0.4 V maximum.
Outputs: H ≥ 1.5 V, L ≤ 1.5 V.





Source: https://assist.dla.mil -- Downloaded: 2026-02-21T14:05Z
Check the source to verify that this is the current version before use.

4.5 Methods of inspection. Methods of inspection shall be specified as follows:

4.5.1 Voltage and current. All voltages given are referenced to the microcircuit ground terminal. Currents given are conventional and positive when flowing into the referenced terminal.

5. PACKAGING

5.1 Packaging requirements. The requirements for packaging shall be in accordance with MIL-M-38510.

6. NOTES

6.1 Intended use. Microcircuits conforming to this specification are intended for original equipment design applications and logistic support, of existing equipment.

6.2 Ordering data. The acquisition document should specify the following:

a. Complete part number (see 1.2).
b. Requirements for delivery of one copy of the quality conformance inspection data pertinent to the device inspection lot to be supplied with each shipment by the device manufacturer, if applicable.
c. Requirement for certificate of compliance, if applicable.
d. Requirements for notification of change of product or process to contracting activity in addition to notification to qualifying activity, if applicable.
e. Requirements for failure analysis (including required test condition of method 5003 of MIL-STD-883), corrective action, and reporting of results, if applicable.
f. Requirements for product assurance options.
g. Requirements for special carriers, lead lengths or lead forming, if applicable, these requirements shall not affect the part number. Unless otherwise specified, these requirements will not apply to direct purchase by or direct shipment to the Government.
h. Requirement for "JAN" marking.

6.4 Abbreviations, symbols, and definitions. The abbreviations, symbols, and definitions used herein are defined in MIL-M-38510, MIL-STD-1331, and as follows:

| | |
|---|---|
| GND | Ground zero voltage potential. |
| $V_{IN}$ | Voltage level at an input terminal. |
| $V_{IC}$ | Input clamp voltage. |
| $I_{IN}$ | Current flowing into an input terminal. |
| $t_{PHZ}$ | Output disable time (of a three-state output) from high level. The time between the specified reference points on the input and output voltage waveforms with the three-state output changing from the defined high level to a high-impedance (off) state. |
| $t_{PLZ}$ | Output disable time (of a three-state output) from low level. The time between the specified reference points on the input and output voltage waveforms with the three-state output changing from the defined low level to a high-impedance (off) state. |
| $t_{PZH}$ | Output enable time (of a three-state output) to high level. The time between the specified reference points on the input and output voltage waveforms with the three-state output changing from a high-impedance (off) state to the defined high level. |
| $t_{PZL}$ | Output enable time (of a three-state output) to low level. The time between the specified reference points on the input and output voltage waveforms with the three-state output changing from a high-impedance (off) state to the defined low level. |

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:05Z
Check the source to verify that this is the current version before use.

6.5 Logistic support. Lead materials and finishes (see 3.3), are interchangeable. Unless otherwise specified, microcircuits acquired for Government logistic support will be acquired to device class B (see 1.2.2) and lead material and finish "C" (see 3.3). Longer length leads and lead forming shall not affect the part number.

6.6 Substitutability. The cross-reference information below is presented for the convenience of users. Microcircuits covered by this specification will functionally replace the listed generic-industry type. Generic-industry microcircuit types may not have equivalent operational performance characteristics across military temperature ranges or reliability factors equivalent to MIL-M-38510 device types and may have slight physical variations in relation to case size. The presence of this information shall not be deemed as permitting substitution of generic-industry types for MIL-M-38510 types or as a waiver of any of the provisions of MIL-M-38510.

| Military device type | Generic-industry type |
|---|---|
| 01 | 54LS151 |
| 02 | 54LS153 |
| 03 | 54LS157 |
| 04 | 54LS158 |
| 05 | 54LS251 |
| 06 | 54LS257B |
| 07 | 54LS258B |
| 08 | 54LS253 |
| 09 | 54LS298 |

6.7 Manufacturers' designations. Manufacturers' circuits included in this specification are designated as shown in table IV herein.

TABLE IV. Manufacturers' designation.

| Device type | Circuits | | | | | | |
|---|---|---|---|---|---|---|---|
| | A | B | C | D | E | F | G |
| | Texas Instruments | Advanced Micro Devices | Raytheon | Signetics | Motorola | Fairchild | National |
| 01 | X | X | X | X | X | X | X |
| 02 | X | X | X | X | X | X | X |
| 03 | X | X | X | X | X | X | X |
| 04 | X | X | X | X | X | X | X |
| 05 | X | X | X | X | X | X | X |
| 06 | X | X | X | X | X | X | X |
| 07 | X | X | X | X | X | X | X |
| 08 | X | X | X | X | X | X | X |
| 09 | X | X | X | X | X | X | X |

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:05Z
Check the source to verify that this is the current version before use.

Custodians:
Army - ER
Navy - EC
Air Force - 17

Review activities:
Army - AR, MI
Navy - OS, SH, TD
Air Force - 11, 19, 85, 99
DLA - ES

User activities:
Army - SM
Navy - AS, CG, MC

Agent:
DLA - ES

Preparing activity:
Air Force - 17

(Project 5962-0775)

*U.S. GOVERNMENT PRINTING OFFICE: 1985-505-038:24267

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:05Z
Check the source to verify that this is the current version before use.

PROBABLE CAUSE OF FAILURE

**INSTRUCTIONS:** In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

*NOTE:* This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

*(Fold along this line)*

*(Fold along this line)*

DEPARTMENT OF THE AIR FORCE

Rome Air Development Center
Griffiss AFB, NY 13441

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

**BUSINESS REPLY MAIL**
FIRST CLASS PERMIT NO. 73236 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE AIR FORCE

Commander
Rome Air Development Center
Attn: RBE-2
Griffiss AFB, NY 13441

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T14:05Z
Check the source to verify that this is the current version before use.

# STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

*(See Instructions - Reverse Side)*

| 1. DOCUMENT NUMBER | 2. DOCUMENT TITLE |
|---|---|
| MIL-M-38510/309D | Microcircuits, Digital, Low Power Schottky TTL, Data Selector/Multiplexer With Three-State Outputs, Cascadable, |

| 3a. NAME OF SUBMITTING ORGANIZATION | 4. TYPE OF ORGANIZATION *(Mark one)* |
|---|---|
| Monolithic Silicon | ☐ VENDOR<br>☐ USER<br>☐ MANUFACTURER<br>☐ OTHER *(Specify)*: |
| b. ADDRESS *(Street, City, State, ZIP Code)* | |

5 PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

| 7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional | b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional |
|---|---|
| c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional | 8. DATE OF SUBMISSION *(YYMMDD)* |

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 202610-21T14:05Z
Check the source to verify that this is the current version before use.