
MILITARY SPECIFICATION SHEET

© LAMPHOLDER, LIGHTS, INDICATOR (HOUSING), STYLE LH94

This specification sheet is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the indicator lights (housing) described herein shall consist of this document and the latest issue of MIL-L-3661.

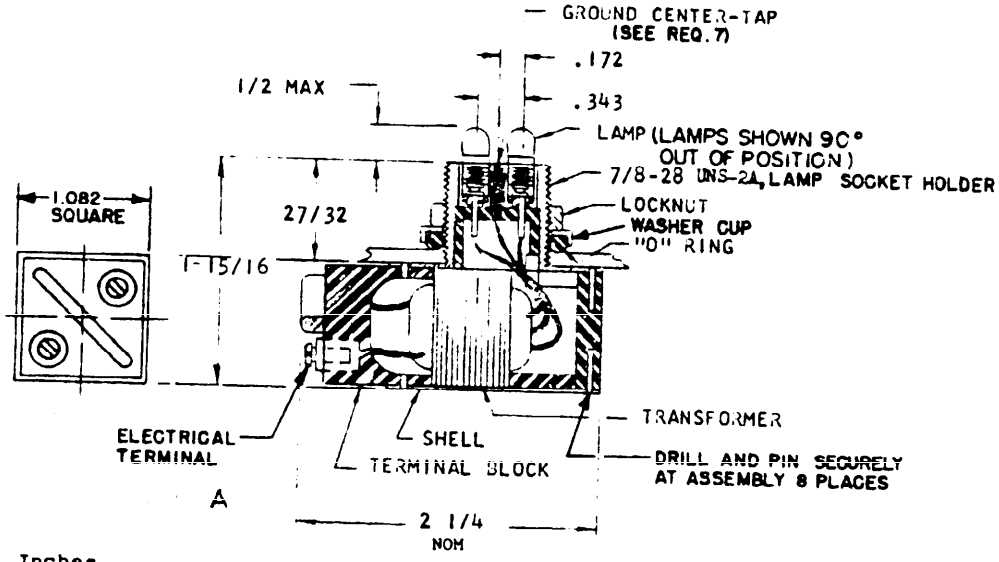

Inches	mm	Inches	mm
0.172	4.37	7/8	22.23
.343	8.71	1.082	27.48
1/2	12.70	1-15/16	49.21
27/32	21.43	2-1/4	57.15

FIGURE 1. Style LH94 housings.

NOTES:
1. Dimensions are in inches. Unless otherwise specified, tolerances are plus or minus 1/64 inch (0.38 mm) for fractions and plus or minus 0.015 inch (0.38 mm) for decimals.
2. Metric equivalents (to the nearest 0.01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

© denotes changes

FSC 6210

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:08Z
Check the source to verify that this is the current version before use.

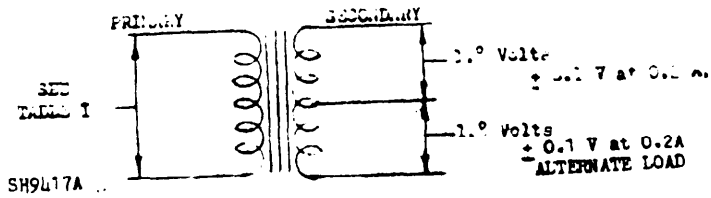



FIGURE 2. Wiring diagram.

TABLE I. Style LH94 housings.

Type designation 1/	Voltage	Lamp accommodation 2/
LH94/1	12	3/ MS15612-3
LH94/2	26	
LH94/3	117	
LH94/4	450	

1/ The style LH94 indicator light housing shall mate with any of the lenses shown on MIL-L-3661/52 through MIL-L-3661/59. Lenses are not furnished.
2/ Lamps are not furnished.
3/ Industry number 1769.

Supersession data: Types LH94/3 and LH94/4 replace type B-27F and B-27G, respectively of Drawing 9000-S6202-73907.

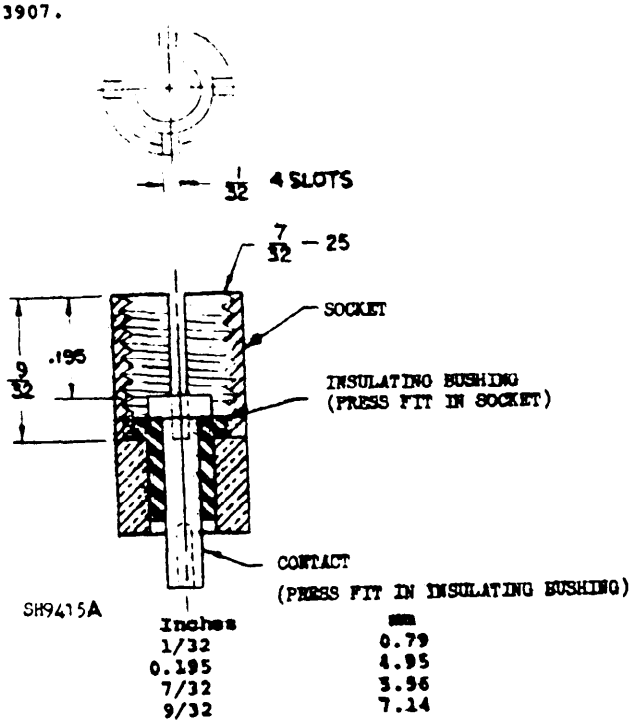

Inches	mm
1/32	0.79
0.195	4.95
7/32	5.56
9/32	7.14

FIGURE 3. Midget screw lamp socket.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:08Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Qualification: Not required.
2. Material:

   (a) Terminal block: Type MME and MAI-60 of MIL-M-14.
   (b) Shell, locknut, washer cup, lamp socket-holder, bushing, socket, contact, electrical terminal: Brass.
   (c) "O" ring: Rubber.

3. Finish: Exposed metal parts shall be black nickel.
4. Design and construction: See figures 1 and 2.
5. Internal wiring: Shall be insulated to prevent the possibility of shorting.
6. Lamp sockets: Shall be as shown on figure 3.
7. Transformers: Center tap of transformer secondary shall be grounded to the face plate of indicator light housing.
8. (C) Electrical terminals: Electrical terminals shall be provided by using No. 6-32 round head corrosion resistant steel machine or brass screws 1/4 inch (6.35 mm) long and inserts securely attached to the terminal block. Molded separations, at least 3/16 inch (4.76 mm) high and 3/32 inch (2.38 mm) shall be provided between the terminals to prevent shortouts when electrical connections are made using terminal lugs.
9. (C) Dielectric withstanding voltage: At sea level shall be 1,000 volts alternating current.
10. Voltage regulation: With rated voltage impressed on the primary of the transformer, the low secondary voltage shall be 2.0 ± 0.1 volts with both 2.5 volt, 0.2 ampere lamps burning and 2.5 ± 0.3 volts with one lamp removed. Load conditions are 0 (no load) and 0.5 ampere full load.
11. Shock: Method II.
12. Temperature rise: Transformers shall be capable of operating continuously with rated voltage impressed across the primary and rated output on the secondary without exceeding a temperature rise of 32°C. The standard ratings shall be as shown in table I.
13. Locknut: Hexagonal with rounded corners 1-1/16 inch (26.99 mm) outside diameter (o.d.), 1 inch (25.4 mm) across flats, 7/8 inch (22.23 mm) UNS-2B-thread, 3/16 inch (4.76 mm) thick.
14. (C) Washer cup: 1-5/16 inch (33.45 mm) o.d., 57/64 inch (22.62 mm) inside diameter, 1/8 inch (3.18 mm) high, .051 inch (1.30 mm) thick.
15. "O" ring: Size shall be AN 6227-17.

QUALITY ASSURANCE PROVISIONS

First article inspection: First article inspection of style LH94 housings shall consist of the following:

(a) Visual and dimensional examination.
(b) Shock.
(c) Vibration.
(d) Moisture resistance.
(e) Dielectric withstanding voltage.
(f) Temperature rise (as specified herein).
(g) Voltage regulation (as specified herein).

Quality conformance inspection: Quality conformance inspection of style LH94 housing shall consist of the following:

(a) Visual and dimensional examination.
(b) Dielectric withstanding voltage.

Sampling for quality conformance inspection: A random sample of the housings shall be selected from each lot in accordance with MIL-STD-105, inspection level I. The AQL shall be 2.5 percent defective. Any housing in the sample containing one or more defects or failing to conform to the dielectric withstanding voltage test shall be rejected. If the number of nonconforming housings in any sample exceeds the acceptance number for that sample, the lot represented by the sample shall be rejected.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:08Z
Check the source to verify that this is the current version before use.

Tests:

Temperature rise: Temperature rise with rated output and primary voltage shall be measured with the transformer installed in the housing and with the cover securely fastened in place. For the 1-hour intermittent duty, the measurements shall be made at the end of 1 hour. Temperature rise shall be determined by the resistance method (see requirement 12).

Voltage regulation: Voltage regulation to determine conformance with requirement 10 shall be made while the transformer is still hot, immediately following the temperature rise.

Preparing activity:
Navy - SH
(Project 6210-N518)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:08Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS. This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE. This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-L-3661/61C(SH)

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1 ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 OCT 76 1426 Replaces edition of 1 Jan 72 which may be used. S/N 0102-LF-001-4260

Source: https://assist.dla.mil -- Downloaded: 202610-16T21:08Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
DEPARTMENT OF THE NAVY
DoD-318

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commander
Naval Ship Engineering Center (SEC 6124C)
Department of the Navy
Washington, DC 20362

FOLD

Source: https://assist.dla.mil -- Downloaded: 202610-16T21:08Z
Check the source to verify that this is the current version before use.