
MILITARY SPECIFICATION SHEET

© LAMPHOLDER, LIGHTS, INDICATOR (HOUSING), STYLE LH95

(FOR D.C. APPLICATIONS)

This specification sheet is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the indicator lights (housing) described herein shall consist of this document and the latest issue of MIL-L-3661.

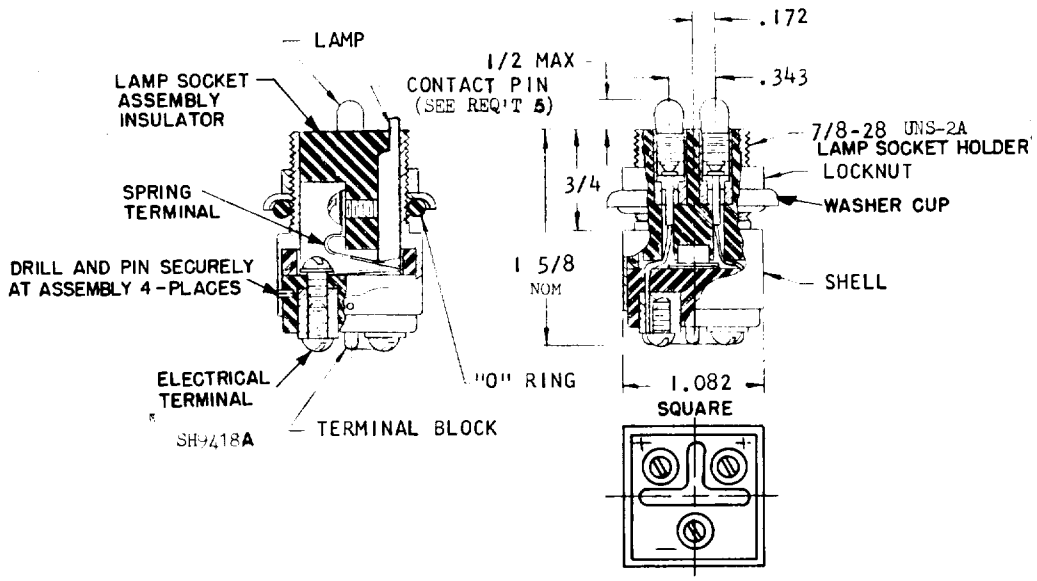

Inches	mm	Inches	mm
0.172	4.37	7/8	22.23
.343	8.71	1.082	27.48
1/2	12.70	1-5/8	41.28
3/4	19.05		

FIGURE 1. Style LH95 housings.

NOTES:
1. Dimensions are in inches. Unless otherwise specified, tolerances are plus or minus 1/64 inch (0.38 mm) for fractions and plus or minus 0.015 inch (0.38 mm) for decimals.
2. Metric equivalents (to the nearest 0.01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

© denotes changes

FSC 6210

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:09Z
Check the source to verify that this is the current version before use.


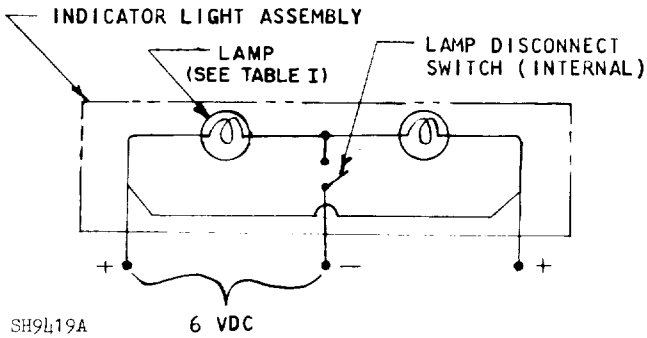


FIGURE 2. Wiring diagram.

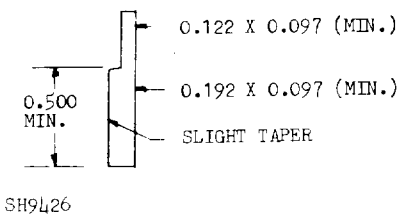

Inches	mm
0.097	2.46
.122	3.10
.192	4.88
.500	12.70

FIGURE 3. Contact pin.


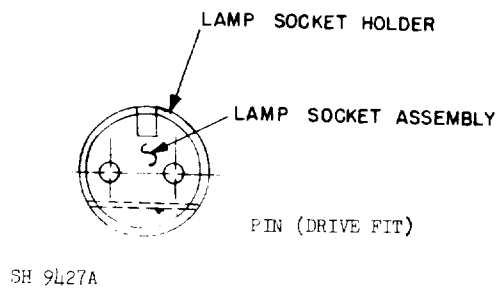


FIGURE 4. Security pin.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:09Z
Check the source to verify that this is the current version before use.

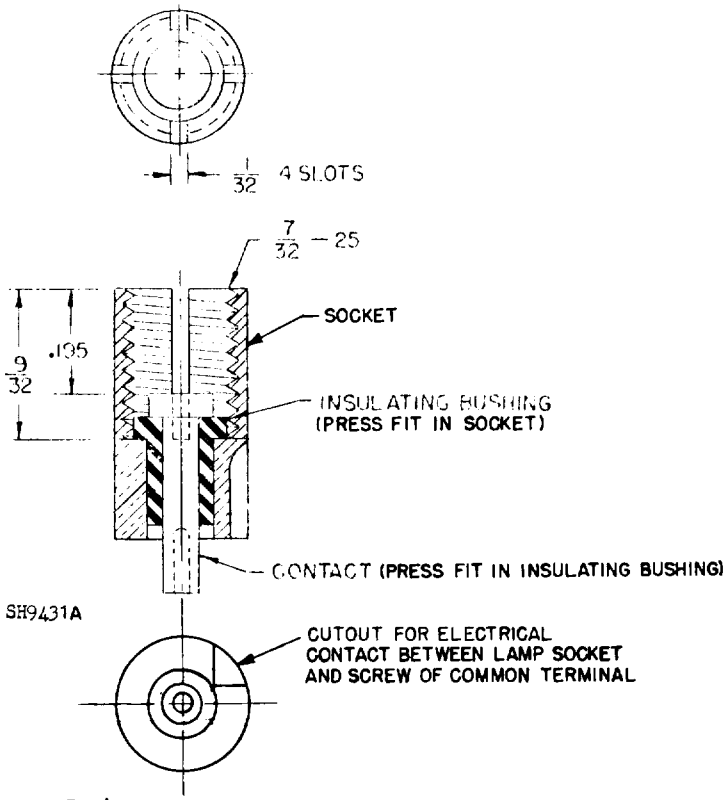

Inches	mm
1/32	0.79
0.195	4.95
7/32	5.56
9/32	7.14

FIGURE 5. Midget screw lamp socket.

TABLE I. Style LH95 housings.

Type designation 1/ 2/	D.c. voltage	Lamp accommodation 2/
LH95	6	3/ MS15612-5

1/ The style LH95 indicator light housing shall mate with any of the lenses shown on MIL-L-3661/52 through MIL-L-3661/59.
2/ Mating lenses and lamps are not furnished. They are furnished by the installing activity.
3/ Industry number 342.

© Supersession data: This specification sheet replaces type B39-A of Drawing 9000-S6202-74307.

REQUIREMENTS:

1. Qualification: Not required.
2. Material. Material shall be as follows:

   (a) Terminal block, contact pin, insulators: Type MME and MAI-60 of MIL-M-14.
   (b) Shell, locknut, washer cup, lamp socket holder, socket, contact and electrical terminal: Brass.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:09Z
Check the source to verify that this is the current version before use.

REQUIREMENTS (Continued):

(c) "O" ring: Rubber.
(d) Spring terminal: Beryllium copper.

3. Finish: Exposed metal parts shall be black nickel.
4. Design and construction: See figures 1 and 2.
5. Contact pin: The contact pin shall make contact with the internal terminals of the assembly and close the lamp circuit when the pin's projection is not less than 1/16 inch (1.59 mm) above the face of the socket shell. The pin design shall be such that the continuous internal terminal contact shall be provided when the pin is depressed from this distance to flush with the face of the shell (see figure 3). (Contact shall be freely operative by indicator lens to make or break the electrical circuit.) The contact pin may be two-piece construction in lieu of one-piece. If this is done, the upper portion shall be brass, 0.6 inch (15.24 mm) long and the lower portion shall be plastic.
6. Security pin: A security pin shall be furnished to prohibit movement of the lamp socket assembly in the lamp socket holder (see figure 4).
7. Internal wiring: Shall be insulated to prevent the possibility of shorting.
8. Lamp sockets: Shall be as shown on figure 5.
9. Locknut: Hexagonal with rounded corners 1-1/16 inch (26.99 mm) outside diameter (o.d.), 1 inch (25.4 mm) across flats, 7/8-inch (22.23 mm) UNS-2B thread 3/16-inch (4.76 mm) thick.
10. Ⓒ Washer cup: 1-5/16 inch (33.45 mm) o.d., 57/64 inch (22.62 mm) inside diameter, 1/8-inch (3.18 mm) high and 0.051 inch (1.30 mm) thick.
11. "O" ring: Size shall conform to AN6227-17.
12. Ⓒ Electrical terminals: Electrical terminals shall be provided by using No. 6-32 corrosion resistant steel, or brass round head machine screws, 1/4-inch (6.35 mm) long and inserts securely attached to the terminal block. Molded separations, at least 3/16-inch (4.76 mm) high and 3/32-inch (2.38 mm) wide, shall be provided between the terminals to prevent short-outs when electrical connections are made using terminal lugs.
13. Dielectric withstanding voltage: At sea level shall be 1,000 volts alternating current.
14. Shock: Method II.

QUALITY ASSURANCE PROVISIONS

First article inspection: First article inspection of style LH95 housings shall consist of the following:

(a) Visual and dimensional examination.
(b) Shock.
(c) Vibration.
(d) Moisture resistance.
(e) Dielectric withstanding voltage.

Quality conformance inspection: Quality conformance inspection of style LH95 housings shall consist of the following:

(a) Visual and dimensional examination.
(b) Dielectric withstanding voltage.

Sampling for quality conformance inspection: A random sample of housings shall be selected from each lot in accordance with MIL-STD-105, inspection level I. The AQL shall be 2.5 percent defective. Any housing in the sample containing one or more defects or failing to conform to the dielectric withstanding voltage test shall be rejected. If the number of nonconforming housings in any sample exceeds the acceptance number for that sample, the lot represented by the sample shall be rejected.

Intended use: Indicator lights are intended for use on switchboards in conjunction with direct current systems.

Preparing activity:
Navy - SH
(Project 6210-N519)

☆U.S. GOVERNMENT PRINTING OFFICE 1978 - 603 022/5059

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:09Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-L-3661/62C(SH)

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address – Optional)*

TELEPHONE NO.

DATE

DD FORM 1426 1 OCT 76

Replaces edition of 1 Jan 72 which may be used.

S/N 0102-LF-001-4260

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:09Z
Check the source to verify that this is the current version before use.