
MILITARY SPECIFICATION SHEET

© LAMPHOLDER, LIGHTS, INDICATOR (HOUSING), STYLE LH96

This specification sheet is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the indicator lights (housing) described herein shall consist of this document and the latest issue of MIL-L-3661.

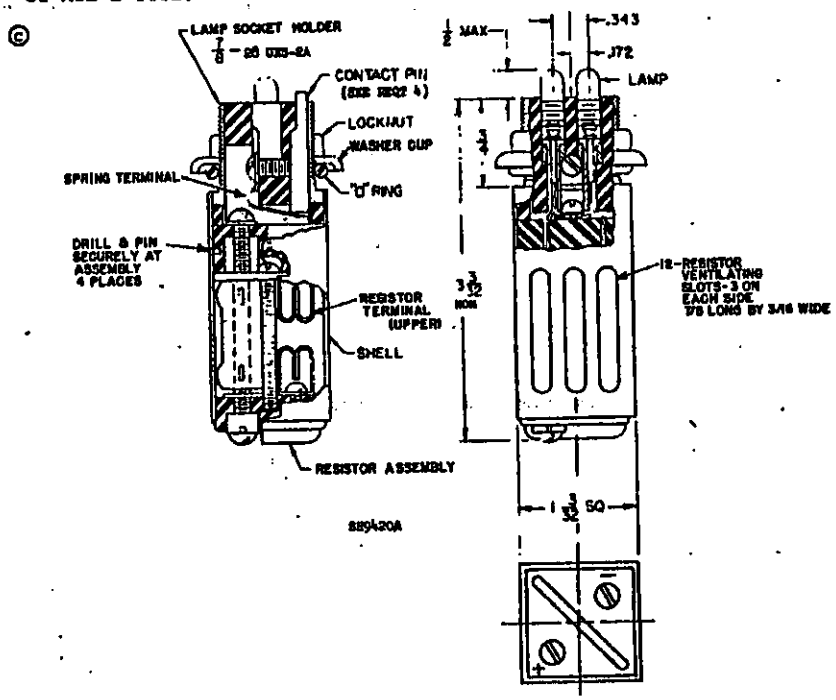

Inches	mm	Inches	mm
0.172	4.37		
3/16	4.76	7/8	22.23
0.343	8.71	1-3/32	27.78
1/2	12.70	3-3/32	78.58

FIGURE 1. Style LH96 housing.

NOTES:
© 1. Dimensions are in inches. Unless otherwise specified, tolerances are plus or minus 1/64 inch (0.38 mm) for fractions and plus or minus 0.015 inch (0.38 mm) for decimals.
2. Metric equivalents (to the nearest 0.01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

© denotes changes

FSC 6210

Source: https://assist.dla.mil -- Downloaded: 20261O-16T21:09Z
Check the source to verify that this is the current version before use.


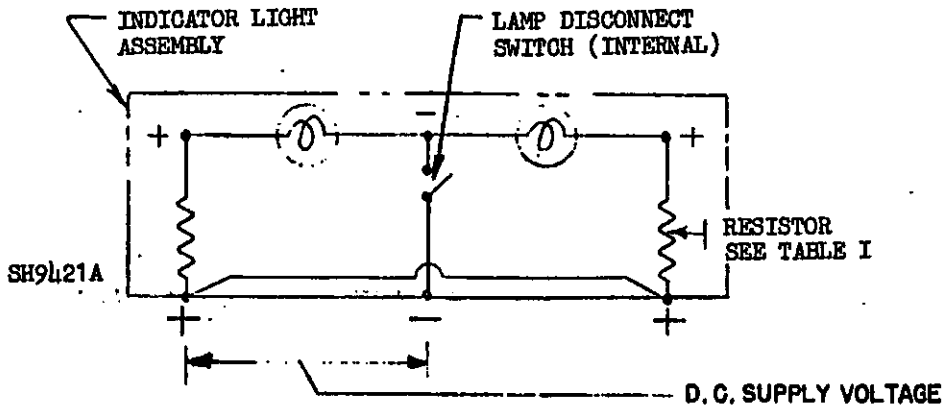


FIGURE 2. Wiring diagram.

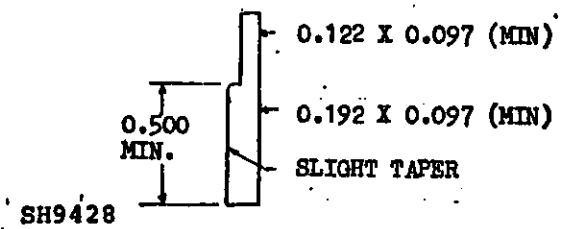

Inch	mm
0.097	2.46
.122	3.10
.192	4.88
.500	12.70

FIGURE 3. Contact pin.


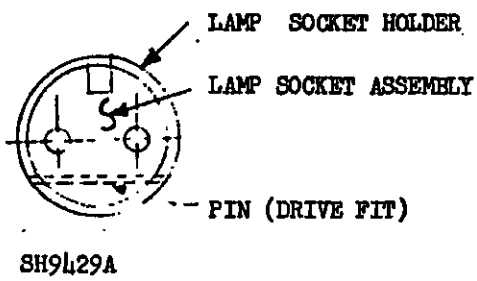



FIGURE 4. Security pin.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:09Z
Check the source to verify that this is the current version before use.

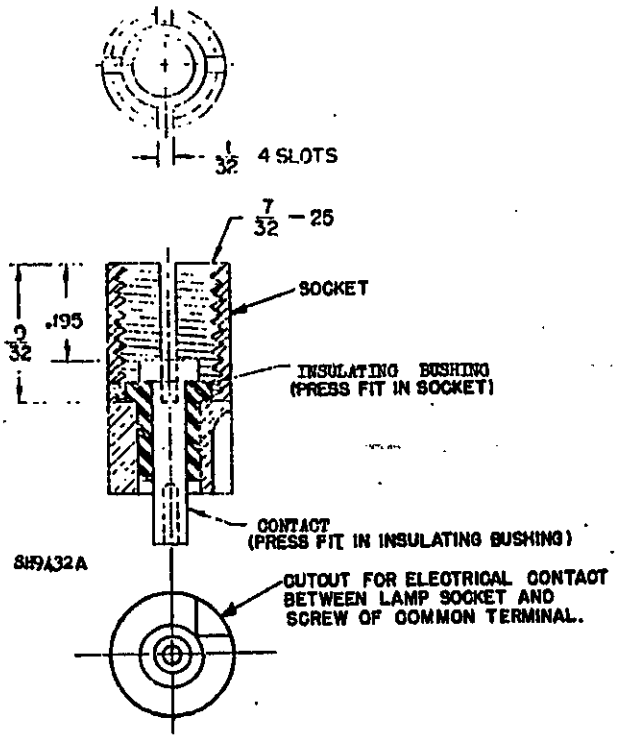

Inches	mm
1/32	0.79
0.195	4.95
7/32	5.56
9/32	7.14

FIGURE 5. Midget screw lamp socket.

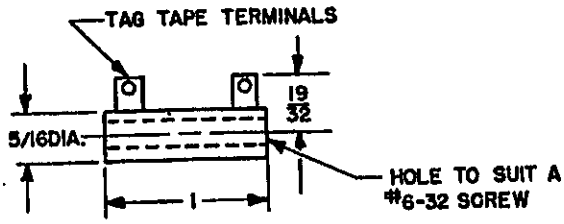


SH 10327

Inches	mm
5/16	7.94
19/32	15.08
1	25.40

FIGURE 6. Resistor.

Source: https://assist.dla.mil -- Downloaded: 20261O-16T21:09Z
Check the source to verify that this is the current version before use.

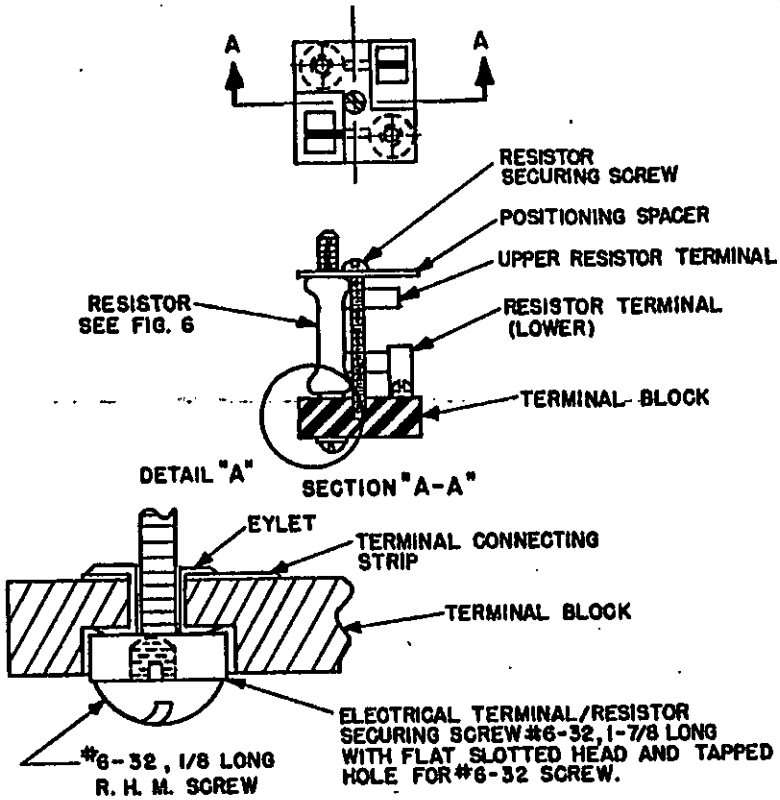

DETAIL "A"- ARRANGEMENT OF POSITIVE TERMINAL

SH 10328

Inches	mm
1/8	3.18
1-7/8	47.63

FIGURE 7. Resistor assembly.

Source: https://assist.dla.mil -- Downloaded: 202610-16T21:09Z
Check the source to verify that this is the current version before use.

TABLE I. Style LH96 housings.

Type designation 1/ 2/	D.c. voltage	Resistor rating	Lamp accommodation 2/
	Volts		
LH96/2	12	300 ohm - 5 watt	3/ MS15612-5
LH96/3	24	600 ohm - 5 watt	
LH96/4	48	1200 ohm - 5 watt	
LH96/5	120	2800 ohm - 5 watt	
LH96/6	240	6300 ohm - 10 watt	

1/ The style LH96 indicator light housings shall mate with any of the lenses shown on MIL-L-3661/52 through MIL-L-3661/59.

2/ Mating lenses and lamps are not furnished. They are furnished by the installing activity.

3/ Industry number 342.

Supersession data: This specification sheet replaces type B-39B of Drawing 9000-86202-74307.

REQUIREMENTS:

1. Qualification: Not required.
2. Material:
   (a) Terminal block, contact pin, insulators: Type MME and MAI-60 of MIL-M-14.
   (b) Shell, locknut, washer cup, lampsocket holder, socket contact, electrical terminal, securing screw, eyelet: Brass.
   (c) "O" ring: Rubber.
   (d) Spring and resistor terminal: Beryllium copper.
3. Finish: Exposed metal parts shall be black nickel.
4. Design and construction: See figures 1 and 2.
5. Contact pin: The contact pin shall make contact with the internal terminals of the assembly and close the lamp circuit when the pin's projection is not less than 1/16 inch (1.59 mm) above the face of the socket shell. The pin design shall be such that continuous internal terminal contact shall be provided when the pin is depressed from this distance to flush with the face of the shell (see figure 3). (Contact shall be freely operative by indicator lens to make or break the electrical circuit.) The contact pin may be two-piece construction in lieu of one-piece as shown herein. If this is done, the upper portion shall be brass 0.6 inch (15.24 mm) long and the lower portion shall be plastic.
6. Security pin: A security pin is required to prohibit movement of the socket assembly in the lamp socket holder (see figure 4).
7. Internal wiring: Shall be insulated to prevent the possibility of shorting.
8. Lamp sockets: Shall be as shown on figure 5.
9. Resistor assembly: The resistor assembly shall be removable and shall be as shown on figure 7. Two wirewound, power type, resistors as shown on figure 6 shall be provided for each type designation of the rating shown in table I. A positioning spacer shall guide the upper resistor terminal to make the connection with the upper, permanently mounted resistor terminal.
10. Locknut: Hexagonal with rounded corners, 1-1/6 inches (26.99 mm) outside diameter (o.d.), 1 inch (25.40 mm) across flats, 7/8 UNS-2B thread, 3/16 inch (4.76 mm) thick.
11. Washer cup: 1-5/16 inch (33.45 mm) o.d., 5-7/64 inch (22.62 mm) inside diameter, 1/8 inch (3.18 mm) high, 0.051 inch (1.30 mm) thick.
12. "O" ring: Size shall conform to AN6227-17.
13. Electrical terminals: Electrical terminals shall be provided as shown on figures 1 and 7. Molded separations, at least 3/16 inch (4.76 mm) high and 3/32 inch (2.38 mm) wide, shall be provided between the terminals to prevent shortouts when electrical connections are made using terminal lugs.
14. Dielectric withstanding voltage: At sea level shall be 1,000 volts alternating current.
15. Shock: Method II.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:09Z
Check the source to verify that this is the current version before use.

QUALITY ASSURANCE PROVISIONS

First article inspection: First article inspection of style LH96 housings shall consist of the following:

(a) Visual and dimensional examination.
(b) Shock.
(c) Vibration.
(d) Moisture resistance.
(e) Dielectric withstanding voltage.

Quality conformance inspection: Quality conformance inspection of style LH96 housings shall consist of the following:

(a) Visual and dimensional examination.
(b) Dielectric withstanding voltage.

Sampling for quality conformance inspection: A random sample of housings shall be selected from each lot in accordance with MIL-STD-105, inspection level I. The AQL shall be 2.5 percent defective. Any housing in the sample containing one or more defects or failing to conform to the dielectric withstanding voltage test shall be rejected. If the number of nonconforming housings in any sample exceeds the acceptance number for that sample, the lot represented by the sample shall be rejected.

Intended use: Style LH96 indicator lights are intended for use on switchboards in conjunction with direct current systems.

Preparing activity:
Navy - SH
(Project 6210-N520)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:09Z
Check the source to verify that this is the current version before use.