
MILITARY SPECIFICATION SHEET

© LAMPHOLDER, LIGHTS, INDICATOR (HOUSING), STYLE LH97

This specification sheet is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the indicator lights (housing) described herein shall consist of this document and the latest issue of MIL-L-3661.

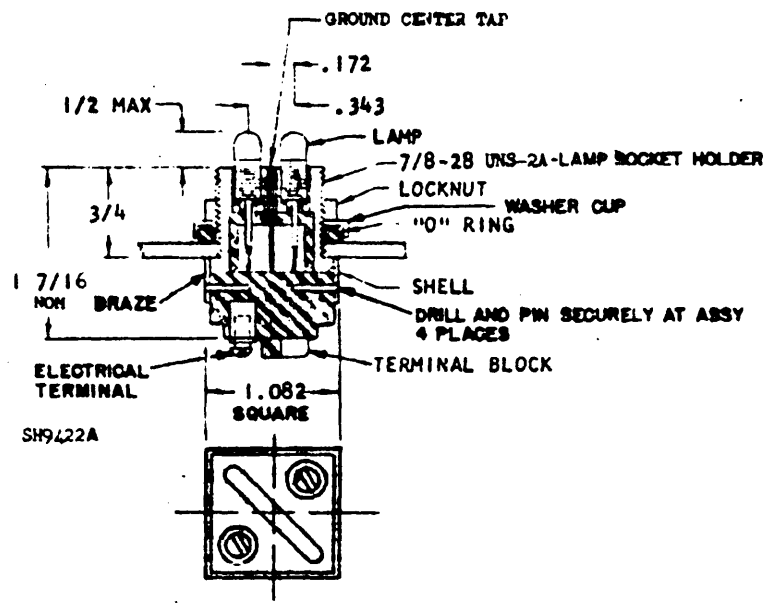

Inches	mm
0.172	4.37
.343	8.71
1/2	12.70
3/4	19.05
7/8	22.23
1.082	27.48
1-7/16	36.51

FIGURE 1. Style LH97 housings.

NOTES:
© 1. Dimensions are in inches. Unless otherwise specified, tolerances are plus or minus 1/64 inch (0.38 mm) for fractions and plus or minus 0.015 inch (0.38 mm) for decimals.
2. Metric equivalents (to the nearest 0.01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

© denotes changes

FSC 6210

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:09Z
Check the source to verify that this is the current version before use.

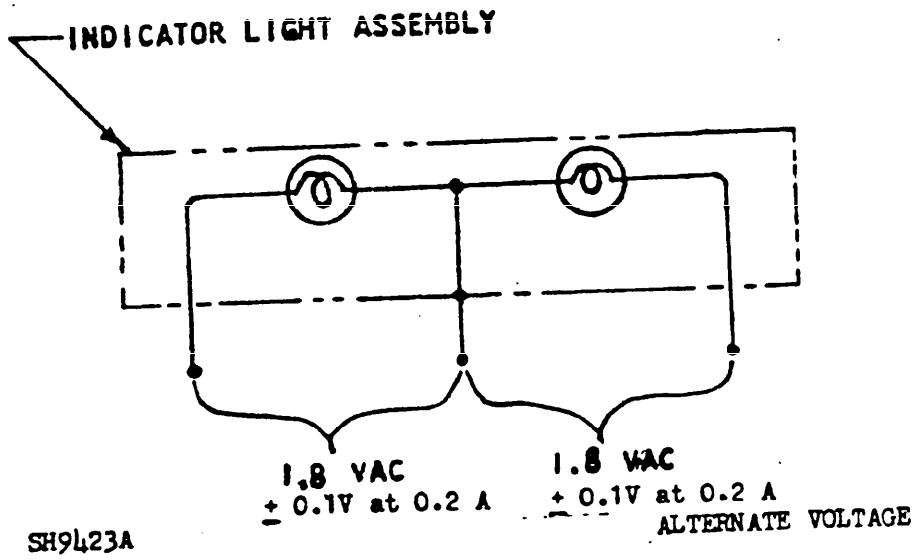


FIGURE 2. Wiring diagram.

TABLE I. Style LH97 housings.

Type designation 1/	Voltage	Lamp accommodation 2/	Transformer 3/
LH97	2.5	4/ MS15612-3	MIL-L-3661/60

1/ The LH97 indicator light housing shall mate with any of the lenses shown on MIL-L-3661/52 through MIL-L-3661/59. The lens is furnished only when specified in the contract or order.


2/ Lamps are not furnished (shown herein for information purposes).

3/ Transformer is not furnished. It is shown herein for information purposes. Transformer may be mounted remotely from the indicator light in applications where space is a problem. The transformer is not required in 2.5 volts alternating current (Vac) systems.

4/ Industry number 1769.

Supersession data: This specification sheet replaces type B27C of Drawing 9000-S6202-73907.

Source: https://assist.dla.mil -- Downloaded: 202610-16T21:09Z
Check the source to verify that this is the current version before use.

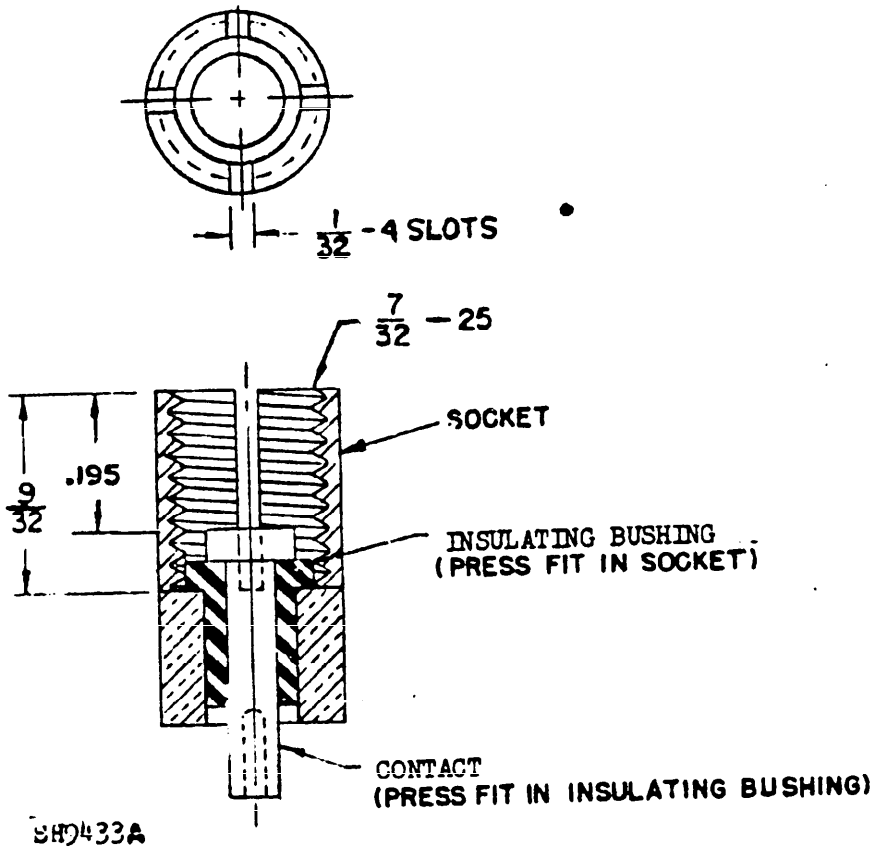

Inches	mm
1/32	0.79
0.195	4.95
7/32	5.56
9/32	7.14

FIGURE 3. Midget screw lamp socket.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:09Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Qualification: Not required.
2. Material:
   (a) Terminal block: Type MME and MAI-60 of MIL-M-14.
   (b) Shell, locknut, washer cup, lampsocket holder, socket, contact, electrical terminal: Brass.
3. Finish: Exposed metal parts shall be black nickel.
4. Design and construction: See figures 1 and 2.
5. Internal wiring: Shall be insulated to prevent the possibility of shorting.
6. Lamp sockets: Shall be as shown on figure 3.
7. Locknut: Hexagonal, with rounded corners, 1-1/16 inches (26.99 mm) outside diameter (o.d.), 1 inch (25.40 mm) across flats, 7/8 UNS-2B thread, 3/16 inch (4.76 mm) thick.
8. © Washer cup: 1-5/16 inches (33.45 mm) o.d., 57/64 inch (22.62 mm) inside diameter, 1/8 inch (3.18 mm) high, .051 inch (1.30 mm) thick.
9. "O" ring: Size shall be AN6227-17.
10. © Electrical terminals: Electrical terminals shall be provided by using No. 6-32, round-head corrosion resistant steel or brass machine screws, 1/4 inch (6.35 mm) long and inserts securely attached to the terminal block. Molded separations, at least 3/16 inch (4.76 mm) high and 3/32 inch (2.38 mm) wide, shall be provided between the terminals to prevent shortouts when electrical connections are made using terminal lugs.
11. © Dielectric withstanding voltage: At sea level shall be 1000 Vac.
12. Shock: Method II.

QUALITY ASSURANCE PROVISIONS

First article inspection: First article inspection of style LH97 housings shall consist of the following:

(a) Visual and dimensional examination.
(b) Shock.
(c) Vibration.
(d) Moisture resistance.
(e) Dielectric withstanding voltage.

Quality conformance inspection: Quality conformance inspection of style LH97 housings shall consist of the following:

(a) Visual and dimensional examination.
(b) Dielectric withstanding voltage.

Sampling for quality conformance inspection. A random sample of housings shall be selected from each lot in accordance with MIL-STD-105, inspection level I. The AQL shall be 2.5 percent defective. Any housing in the sample containing one or more defects or failing to conform to the dielectric withstanding voltage test shall be rejected. If the number of nonconforming housings in any sample exceeds the acceptance number for that sample, the lot represented by the sample shall be rejected.

Intended use: Indicator lights are intended for use in conjunction with 60 or 400 Hz alternating current, systems. This indicator light shall not be used for direct current applications.

Preparing activity:
Navy - SH
(Project 6210-N521)

Source: https://assist.dla.mil -- Downloaded: 202610-16T21:09Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

(FOLD BACK THIS FORM ALONG THIS LINE.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:09Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Commander
Naval Sea Systems Command (SEA 55z3)
DOD Standardization Program and Documents
Division
Department of the Navy
Washington, DC 20362

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:09Z
Check the source to verify that this is the current version before use.