MILITARY SPECIFICATION SHEET

LAMPHOLDERS, INDICATOR LIGHTS, INDICATOR-LIGHT HOUSINGS, AND INDICATOR-LIGHT LENSES, HOUSING STYLE LH100

The complete requirements for procuring the housing described herein shall consist of this document and the latest issue of Specification MIL-L-3661.

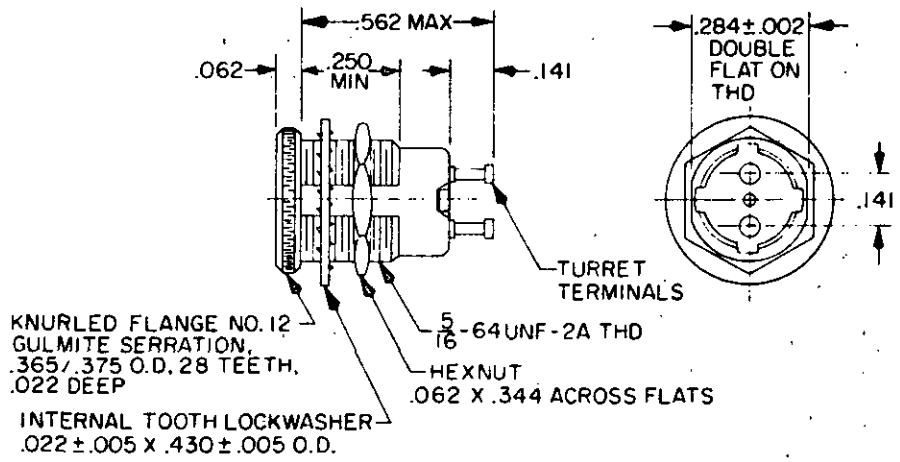



INCHES	MM	INCHES	MM
.001	.03	.289	7.34
.002	.05	.315	8.00
.005	.13	.344	8.74
.022	.56	.365	9.27
.062	1.57	.375	9.53
.141	3.58	.430	10.92
.250	6.35	.562	14.27
.284	7.21		

NOTES:
1. Dimensions are in inches.
2. Unless otherwise specified, tolerance is ±.015(.38 mm).
3. Housing and terminal design optional provided the dimensions fall within the configuration shown.
4. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

(B) denotes changes

FSC 6210

Source: https://assist.dla.mil -- Downloaded: 202610-16T21:10Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction: See figure.

Dielectric withstanding voltage: Sea level: 500 volts rms at 60 Hz.

Contact spring pressure: 2-13 ounces.

Type designation	Mating lens	Lamp accommodation
LH100/1	LC47	T-1 submidget flange base, incandescent lamp

Preparing activity:
Navy - EC

Agent:
DSA - ES

(Project 6210-N452)

☆ U. S. GOVERNMENT PRINTING OFFICE: 1971 -714-160/3222

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:10Z
Check the source to verify that this is the current version before use.