
MILITARY SPECIFICATION SHEET

BATTERY, DRY, BA-3051/U

This specification sheet is approved for use by the Electronics Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the dry battery described herein shall consist of this document and the latest issue of Specification MIL-B-49030(EL).

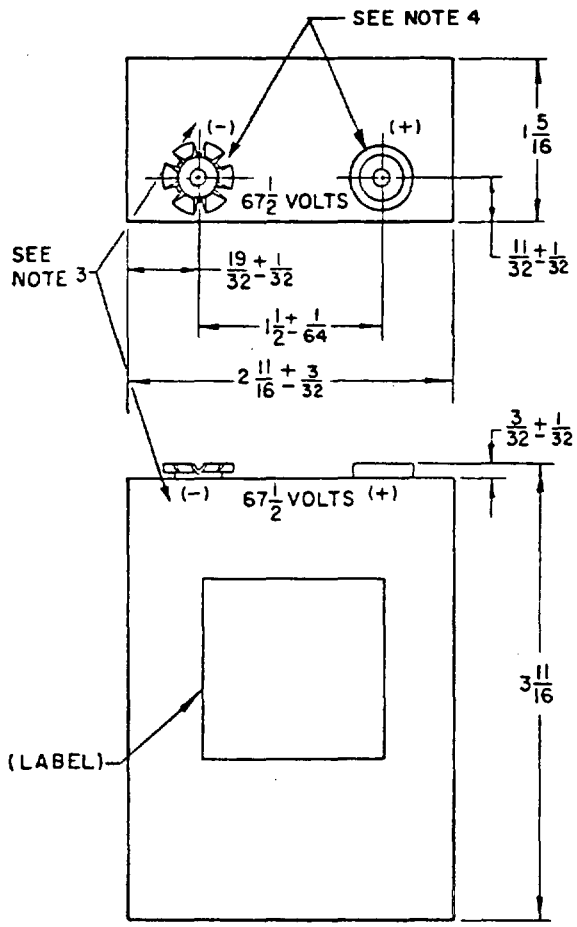

INCHES	MM
1/64	.40
1/32	.79
1/16	1.59
3/32	2.38
11/32	8.73
19/32	15.08
1 5/16	33.34
1 1/2	38.10
2 11/16	68.26
3 11/16	93.66

NOTES:

1. All dimensions shown on figure are in inches. Unless otherwise specified, tolerance is ±1/16 inch.
2. Metric equivalents specified in table are for general information only and are based upon 1 inch = 25.4 millimeters.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:44Z
Check the source to verify that this is the current version before use.

NOTES: (Contd)

3. Voltage and polarity markings may be placed either on the top or front face of the battery.

4. Snap-on terminals are required (See general specification for details).

REQUIREMENTS:

Dimensions and configuration: See figure.

Nominal voltage: 67.5 volts.

Usual number and type of cells: 45 "N" cells.

Usual cell connection: Series

Terminals: Snap-on.

Weight (maximum): 1.3 pounds.

Capacity tests: When the battery is tested in accordance with the methods of examination and test of this specification, the minimum capacity-test requirements shall be as specified herein.

First Article inspection:

Vibration test.
Mechanical-shock test.
Insulation-resistance test.
Visual and mechanical (external and internal).
Dimensions and weight.
Battery voltage.
Waterproofing-of-jacket test.
Capacity: I, LT, and HT.

Quality conformance inspection:

Visual and mechanical (external).
Dimensions and weight.
Battery voltage.
Insulation-resistance test.
Waterproofing-of-jacket test.
Vibration test.
Mechanical-shock test.
Capacity: LT, HT, T and D.

Methods of examinations and test:

Capacity tests: See requirements for capacity specified herein.

Test	Storage period	Temperature	Minimum Svce. Req'd (Hrs)
I (Initial 70°F)	48 Hrs Min.	70°F	30
LT (0°F)	16 Hrs Min.	0°F	4
HT (160°F)	7 days plus	160°F	
	48 Hrs Min.	70°F	20
T	13 Wks plus	113°F	
	48 Hrs Min.	70°F	22
D	52 Wks	70°F	24

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:44Z
Check the source to verify that this is the current version before use.

Discharge - The battery shall be discharged through 4500 ohms continuously to an end voltage of 40.5 volts.

Closed circuit voltage: Use TS-183( )/U per special marking or, with minimum permissible voltage as specified for TS-183( )/U, use a load resistance value of 1980 ohms.

Special marking on each unit package:

TO TEST THIS BATTERY WITH TS-183( )/U

USE JACK NO.	MINIMUM PERMISSIBLE VOLTAGE
24	62.1

Unless expressly authorized, this test information shall apply to Army and Air Force applications only.

Custodian:
Army - EL

Preparing Activity:
Army - EL

(Project 6135-A142-5)

☆ U. S. GOVERNMENT PRINTING OFFICE: 1976-703-020/311

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:44Z
Check the source to verify that this is the current version before use.