INCH POUND

MIL-C-49137/3B
1 April 1992
SUPERSEDING
MIL-C-49137/3A
14 May 1979


MILITARY SPECIFICATION SHEET


CAPACITORS, FIXED, ELECTROLYTIC (SOLID ELECTROLYTE)
TANTALUM, POLAR, INSULATED, METAL CASE, WITH PLASTIC END-FILL
NONHERMETICALLY SEALED,
STYLE-CX03

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-49137.

Inactive for new design after 15 Sep 1985

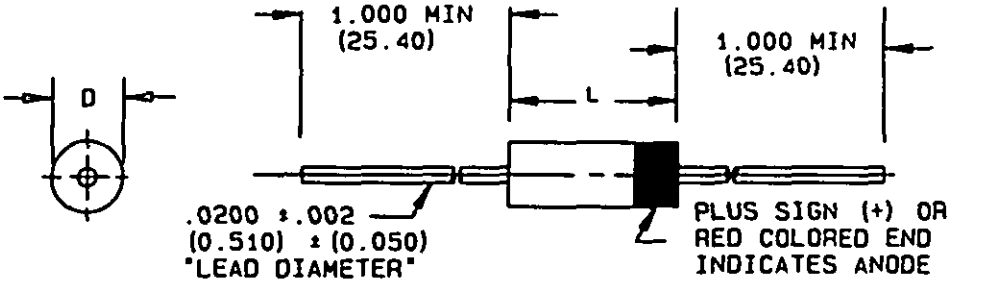



CIRCUIT DIAGRAM

Case size	Dimensions: Diameter D ±.015 (.38)	Dimensions: Length L ±.020 (.51)
A	.085 (2.16)	.250 (6.35)
B	.100 (2.54)	.280 (7.11)
C	.170 (4.32)	.335 (8.51)
D	.170 (4.32)	.410 (10.41)

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Metric equivalents are in parentheses.

FIGURE 1. Dimensions and configuration.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:49Z
Check the source to verify that this is the current version before use.

TABLE I. Style CX03 characteristics.

Type designation 1/	DC rated voltage (85°C)	Cap. (nom)	DC leakage (max) +25°C	Dissipation factor	Case size
	Volts	µF	µA	%	
CX03D475-	6	4.7	1.0	6	A
CX03H685-	15	6.8	1.0	6	B
CX03H22G-	15	22	3.0	8	D
CX03K106-	25	10	1.5	8	C
CX03N104-	50	0.10	1.0	4	A

1/ Complete type designation will include an additional symbol indicating capacitance tolerance.

REQUIREMENTS:

Qualification inspection is not required.

Design and construction:

Dimensions and configuration: See figure 1.

Case material: Metal can, with plastic or epoxy end-fill, nonhermetically sealed.

Leads: Solder-coated metal.

DC rated voltage: See table I.

Operating temperature: -55°C to +85°C.

DC leakage (DCL): See table I.

Capacitance (cap): See table I.

Cap. tolerance: ±10 percent (K), or ±20 percent (M).

Dissipation factor (DF): See table I.

Stability at low and high temperature: In accordance with MIL-C-49137.

Step 1 (+25°C): DCL - See table I.

Cap. - Within tolerance specified in table I.

DF - See table I.

Step 2 (-55°C): ΔCap. - Within -15 percent of step 1 measured value.

DF - 200 percent of table I.

Step 3 (+25°C): DCL - See table I.

ΔCap. - Within 10 percent of step 1 measured value.

DF - See table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:49Z
Check the source to verify that this is the current version before use.

Step 4 (+85°C): DCL - 10 times 25°C limit (see table I).

ΔCap. - Within +15 percent of step 1 measured value.

DF - 150 percent of table I.

Step 5 (+25°C): DCL - See table I.

ΔCap. - Within 10 percent of step 1 measured value.

DF - See table I.

Surge voltage: In accordance with MIL-C-49137.

DCL - See table I.

ΔCap. - Within 10 percent of initial value.

DF - See table I.

Life: Method 108 of MIL-STD-202.

1,000 hours:

At 25°C: DCL - 200 percent of table I.

ΔCap. - Within 10 percent of initial measured value.

DF - See table I.

NOTES: These capacitors are intended to be used only where supplemental moisture protection is provided or for noncritical applications where hermetic moisture protection is not required.

Revision letters are not used to denote changes due to the extensiveness of the changes.

CONCLUDING MATERIAL

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Navy - SH
Air Force - 99
DLA - ES

User activities:
Navy - AS, CG, MC, OS
Air Force - 19

Preparing activity:
Army - ER

Agent:
DLA - ES

(Project 5910-1779)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:49Z
Check the source to verify that this is the current version before use.