INCH-POUND
MIL-PRF-49169B(CR)
6 April 1999
SUPERSEDING
MIL-L-49169A (ER)
2 February 1982

PERFORMANCE SPECIFICATION

LIGHT-EMITTING DIODE ARRAY

This specification is approved for use within the Communications-Electronics Command, Department of the Army and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1. Scope. This specification covers three types of common module, Light-Emitting Diode Arrays, as follows:

Type I	SU-96/UA (180 element array)
Type II	SU-122/UA (120 element array)
Type III	SU-127/UA (90 element array)

2. APPLICABLE DOCUMENTS

2.1. General. The documents listed in this section are specified in sections 3 and 4 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements documents cited in sections 3 and 4 of this specification, whether or not they are listed.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, US Army, Communications-Electronics Command, ATTN: AMSEL-LC-LEO-E-EP, Fort Monmouth, New Jersey 07703-5023 by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 5855

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:54Z
Check the source to verify that this is the current version before use.

2.2 Government Documents.

2.2.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS), and supplement thereto, cited in the solicitation (see 6.2).

STANDARDS

MIL-STD-810 Environmental Test Methods and Engineering Guidelines

HANDBOOKS

MIL-HDBK-454 General Guidelines for Electronic Equipment

(Unless otherwise indicated, copies of the above specifications, standards and handbooks are available from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111-5094).

2.2.2 Other Government documents, drawings, and publications. The following Government documents, drawings and publications form a part of this specification to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation (see 6.2.b).

DRAWINGS

SM-D-806557	Light Emitting Diode Array
5002478	Light Emitting Diode Array, SU-122/UA
5002475	Light Emitting Diode Array, SU-127/UA

(Copies of specifications, standards, drawings and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer).

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein (except for related associated specifications or specification sheets), the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:54Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1. Description. The Light-Emitting Diode Array, herein referred to as the LED module, converts electrical signals into visible light within an infrared system.

3.2 Dimensions. The dimensions and outline characteristics of the Light-Emitting Diode shall be in accordance with the following drawings to ensure proper interface and compatibility with the family of diode arrays:

TYPE I	SM-D-806557
TYPE II	5002478
TYPE III	5002475

3.2.1. Weight. Weight of the LED module shall not be greater than 0.35 pound.

3.3. First article. When specified in the contract (see 6.2) the contractor shall furnish first article units for inspection (see 4.2).

3.4. Parts, materials, and processes. The contractor shall select the parts, materials and processes, but these materials shall be capable of meeting all of the operational and environmental performance requirements specified herein.

3.5 LED array. Each LED array shall be operated (burned-in) for 150 hours prior to assembly in the LED module. Burn-in shall be performed by biasing the array so that minimum bias current is not less than 1.33 milliamperes. Ambient temperature need not be controlled during burn-in.

3.6. Performance characteristics. Unless otherwise specified herein, the LED module shall meet specified performance requirements at an ambient temperature of +23° C ±2° C and all bias tolerances shall be ±0.1 Vdc.

3.6.1. Radiated power output. The average element radiant power, defined as the sum of each element's radiant power divided by the number of elements, shall be as tabulated below:

BIAS (VDC)	AVERAGE RADIANT POWER x 10^{-6} (WATTS)		
	AT -54° C	AT +23° C	AT +71° C
2.5	≥ 2.0	≥ 2.0	≥ 1.1
4.0	≥ 7.5	= 7.5, ± 0.4	≥ 4.3
8.4	≥ 21.0	≥ 21.0	≥ 12.0

3.6.2. Input power. The total power applied to the LED module with 4.0 Vdc applied (see 4.5.2) shall not be greater than 3.4 watts for Type I, 2.3 watts for Type II, or 1.7 watts for Type III.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:54Z
Check the source to verify that this is the current version before use.

3.6.3. Array configuration. The LED module shall consist of 180, 120 or 90 elements arranged in a configuration with pin-to-element connections as specified on the applicable drawing (see 3.11.2).

3.6.4. LED module tracking. The radiated power output of each element shall track the average element radiated power in accordance with the requirements as follows:

	% TRACKING		
BIAS (VDC)	AT -54° C	AT 23° C	AT 71° C
2.5	± 15	± 10	± 15
4.0	± 10	± 5	± 10
8.4	± 15	± 10	± 15

3.6.5. LED wavelength. The wavelength of light from each element shall be 660 ±10 nanometers with the LED module biased at 4.0 Vdc.

3.6.6. Emitting area. The emitting area dimensions shall be as specified on the applicable drawings. There shall be no more than 4 shape defects (see 3.11.3) in an LED array. The channels of the LED array as defined below shall be defect-free of shape defects.

Type I - channels 31 through 150
Type II channels 51 through 130
Type III - channels 71 through 110 and 141, 142, 143

3.7. Environmental conditions.

3.7.1. Temperature shock. The LED module shall not be damaged (see 3.11.4) by sudden changes in temperature between -54° C and +95° C.

3.7.2. High temperature. The LED module shall not be damaged (see 3.11.4) under storage to +95° C, or continuous operation to +71° C, and shall operate for 30 minutes at +95° C.

3.7.3. Low temperature. The LED module shall not be damaged (see 3.11.4) by operation to -54° C or storage to -62° C.

3.7.4. Shock. The LED module shall not be damaged (see 3.11.4) by high intensity shocks of 100 g's peak amplitude with 11 milliseconds duration and by bench handling tests.

3.7.5. Vibration. The LED module shall not be damaged (see 3.11.4) by vibration over the frequency spectrum at the specified g levels and amplitudes shown in Figure 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:54Z
Check the source to verify that this is the current version before use.

3.8. Operational life (reliability). Over an accelerated operational life test of 500 hours when operated at a bias level of 4.0 Vdc and in a +50° C temperature environment, the average radiant power output of the diodes of the LED module shall not decrease by more than 20%. In addition, the LED module shall meet the tracking requirements of 3.6.4 after 500 hours of accelerated operational life testing. The 500-hour accelerated operational life demonstrates a MTBF of at least 6,804 hours.

3.9 Nameplates and product marking. The LED module shall be marked for identification and reference designation by the contractor with the following: CAGE CODE; DRAWING #; Contract #; Serial Number; and Manufacturer's CAGE CODE.

3.10 Workmanship, Standards of. Workmanship shall be such that components will meet all requirements of this specification and any referenced drawings when inspected in accordance with Section 4. The equipment shall be fabricated in such a manner as to be uniform in quality and shall be free from defects that will affect their life, serviceability, interchangeability, or appearance. MIL-HDBK-454 may be used as guidance.

3.11 Definitions.

3.11.1. Element. An element is defined as any one of the 180, 120, or 90 light-emitting diodes of the LED module.

3.11.2. Array. An array is defined as a single line of 180, 120, or 90 elements arranged in the configuration shown on its respective drawing.

3.11.3. Shape defect. A shape defect of an individual element, measured when energized, is defined as an emitting area which varies by more than ±15% of the specified area or a length which varies by more than ±5% of the specified length as defined by the drawings (see 3.2).

3.11.4. Damage. Breakage, loosening, shifting, evidence of corrosion, or failure of any finish, hardware, connection, or component; and any degradation of LED module performance to values less than specified herein.

4. VERIFICATION

4.1. Classification of inspections. Inspections shall be classified as follows:

a. First article inspection (see 4.2).
b. Conformance inspection (see 4.4).

4.2. First article inspection. When specified in the contract, the first article inspection shall be performed by the contractor on a minimum of 6 sample units.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:54Z
Check the source to verify that this is the current version before use.

4.2.1 Inspections. All materials, parts, processes and assemblies shall be examined for conformance to Table I Inspections and the sampling plan of Table I-1.

TABLE I INSPECTIONS

INSPECTION REQUIREMENT	REQ'T PARA	INSPECTION CRITERIA
Array burn-in*	3.5	4.2.1
Emitting area*	3.6.6	4.5.6
Weight not as specified	3.2.1	4.9
Marking not as specified	3.9	4.8
Workmanship not as specified	3.10	4.8
Dimensions not as specified* - Diameter, interface (2.001" ref) - Holes (4) thru cover, location - Mark, alignment, location - Pins, connector, location - Field flattener lens	3.2	Drawings SM-D-806557 5002475 5002478

*Inspect every array 100 percent.

TABLE I-1 Sampling Plan for Inspection.

Lot Size	Sample Size
2 to 8	2
9 to 15	3
16 to 25	5
26 to 50	8
51 to 90	13
91 to 150	20

4.2.2. Tests. Upon successful completion of the inspections specified in 4.2.1, perform the tests of Table II in any order. Prior to start of tests specified in Table II, LED modules shall be identified as to their applicable subgroups. Unless otherwise specified in the contract (see 6.2), three units shall be tested in subgroup 1 and three units in subgroup 2. Failure of any tests on any unit shall constitute first article failure.

4.2.3 Disposition of first article samples. First article samples shall not be considered as part of the procurement quantities.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:54Z
Check the source to verify that this is the current version before use.

TABLE II - FIRST ARTICLE INSPECTION.

INSPECTION	REQ'T PARA.	TEST PARA.	SUBGROUP 1	2
Radiated power output	3.6.1	4.5.1	X	X
Input power	3.6.2	4.5.2	X	X
Array configuration	3.6.3	4.5.3	X	X
LED module tracking	3.6.4	4.5.4	X	X
LED wavelength	3.6.5	4.5.5	X	X
Temperature shock	3.7.1	4.6.1	X	
High temperature	3.7.2	4.6.2	X	
Low temperature	3.7.3	4.6.3	X	
Shock	3.7.4	4.6.4	X	
Vibration	3.7.5	4.6.5	X	
Operational life (reliability)	3.8	4.7		X

4.3. Inspection procedures for provisions. Unless otherwise specified herein, the LED modules shall be operated at an ambient temperature of +23° C ±2° C. External bias for performance tests shall be applied using a 205-ohm ±1.0% resistor in series with each element.

4.4. Conformance inspection.

4.4.1. Inspection. Inspection shall be as specified in 4.2.1.

4.4.2. Tests.

4.4.2.1. Group A inspection. Group A inspection shall be conducted at ambient temperature only on all LED modules following successful inspection of 4.2.1. Group A tests listed in Table III may be performed in any order. Failure of any test shall be cause for rejection of that LED module.

TABLE III GROUP A INSPECTION

INSPECTION	REQ'T PARA.	TEST PARA.
Radiated power output	3.6.1	4.5.1
Input power	3.6.2	4.5.2
LED module tracking	3.6.4	4.5.4

4.4.2.2 Group B inspection. Group B inspection shall be conducted on LED modules selected from LED modules which have passed the tests in 4.4.2.1. The sample(s) shall be tested in accordance with the inspections listed in Table IV. Samples shall be selected in accordance with 4.4.2.2.3. Group B tests listed in Table IV may be performed in any order.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:54Z
Check the source to verify that this is the current version before use.

4.4.2.2.1. Sampling for Group B inspection. Group B inspection samples shall be selected as follows:

TABLE IV GROUP B INSPECTION

INSPECTION	REQ'T PARA.	TEST PARA.
Radiated power output	3.6.1	4.5.1
LED module tracking	3.6.4	4.5.4
LED wavelength	3.6.5	4.5.5

TABLE IV-1 Group B Inspection Sampling.

MONTHLY LOT SIZE	# OF SAMPLE UNITS MONTHLY
1 - 99	1
100 - 299	3
300 - 499	5
500 - 999	7
1000 or more	10

4.4.2.2.2. Group B failures. Actions required relative to Group B failures shall be as specified in the contract (see 6.2).

4.4.2.2.3. Disposition of Group B samples. Group B samples shall be accepted on contract subsequent to the tests of Table III.

4.4.2.4. Group D inspection. Not required.

4.5. Test methods. Unless otherwise specified, all bias voltage tolerances shall be ±0.1 Vdc.

4.5.1. Radiated power output. The total radiated power output from each emitting element shall be measured at ambient, -54° C and +71° C with the LED module in its final assembled configuration. This test may be performed in conjunction with temperature tests 4.6.2 and 4.6.3. The emitted power is defined as the power radiated through the field flattener lens without applying any correction for the transmission losses due to the lens. The radiated power output shall be measured using a suitable detector of area (A) calibrated at 660 nanometers and positioned a distance (D) from the radiation source. The optical arrangement for this test is not critical, except that the solid angle of the cone of radiation subtended at the detector from the center element of the diode array shall not be greater than 0.2 steradian. The center of the detector shall be on the optical axis of the field flattener. The total radiated power output shall be calculated using the following equation:

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:54Z
Check the source to verify that this is the current version before use.

$$P_T = P_A \left(\frac{\pi D^2}{A} + 1 \right)$$

P_T = Total radiated power (2π steradians)

P_A = Power measured at detector aperture

A = Sensitive area of detector

D = Distance of detector from radiation source

Failure to meet requirements of 3.6.1 shall constitute failure of this test.

4.5.2. Input power. The LED module forward bias voltage shall be adjusted to 4.0 ±0.1 Vdc and the current for each element shall be measured. The total power (P_T) shall be calculated using

$$P_T = \sum_{j=1}^{N} I_j (V - I_j R) \quad \text{for N} = \begin{cases} 180 \text{ (type I)} \\ 120 \text{ (type II)} \\ 90 \text{ (type III)} \end{cases}$$

where I_j is the current for the jth element, V is the bias voltage (4.0 Vdc), and R is the series resistance (205 ohms ±1% tolerance). All elements of the array need not be biased simultaneously. Failure to meet requirements of 3.6.2 shall constitute failure of this test.

4.5.3. Array configuration. Each element shall be separately energized at 4.0 Vdc bias and proper pin-to-element connections shall be verified. Failure to meet requirements of 3.6.3 shall constitute failure of this test.

4.5.4. LED module tracking. The radiant power output for each element of the array shall be measured in accordance with 4.5.1 at forward bias voltage levels of 2.5, 4.0, and 8.4 Vdc. Failure to meet requirements of 3.6.4 shall constitute failure of this test.

4.5.5. LED wavelength. The output wavelength of five randomly spaced elements shall be measured when biased at 4.0 Vdc. Failure to meet requirements of 3.6.5 shall constitute failure of this test.

4.5.6. Emitting area. The emitting area of all elements in the array shall be measured while the array is energized at 4.0 Vdc forward bias. Failure to meet requirements of 3.6.6 shall constitute failure of this test.

4.6. Environmental tests. The environmental tests shall be performed in accordance with MIL-STD-810. Unless otherwise specified, the operating tests required by MIL-STD-810 before, during, and after each environmental test shall be those specified in 4.5.1, 4.5.2, and 4.5.4.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:54Z
Check the source to verify that this is the current version before use.

4.6.1 Temperature shock. The LED module shall be tested in accordance with MIL-STD-810, Method 503, Procedure I except that the temperature of steps 1 and 4 shall be +95°C and the temperature of step 2 shall be -54°C. The LED module shall not be operated during the temperature shock test (no measurement taken during this test). Failure to meet requirements of 3.7.1 shall constitute failure of this test.

4.6.2. High temperature. The LED module shall be tested in accordance with MIL-STD-810, Method 501, Procedure I except that the temperature of step 2 shall be +95°C and the LED module shall be operated during the final 30 minutes of step 3 at 4 Vdc bias (no measurements taken during step 3). The temperature of step 4 and 5 shall be +71°C. The unit shall be operated at +71°C. Failure to meet the requirements of 3.7.2 shall constitute failure of this test.

4.6.3. Low temperature. The LED module shall be tested in accordance with MIL-STD-810, Method 502, Procedure I except that the storage temperature of step 2 shall be -62°C and shall be maintained until temperature stabilization is reached. The low operating temperatures of steps 4 and 5 shall be -54°C. Failure to meet the requirements of 3.7.3 shall constitute failure of this test.

4.6.4. Shock. The LED module shall be tested in accordance with MIL-STD-810, Method 516.1, Procedure IV, Figure 516.1-1 (100 g's peak value at 11 milliseconds duration) and Procedure V. The LED shall not be operated during the shock test. Failure to meet the requirements of 3.7.4 shall constitute failure of this test.

4.6.5. Vibration. The LED module shall be tested in accordance with MIL-STD-810, Method 514.1, Procedures I and VIII except that the curve shown in Figure 1 of this specification shall be used in lieu of the MIL-STD-810 curves. The LED module shall not be operated during vibration. The sinusoidal cycling time shall be 120 minutes per axis. The dwell time shall be one-sixth of the cycling time at each resonance. Failure to meet the requirements of 3.7.5 shall constitute failure of this test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:54Z
Check the source to verify that this is the current version before use.

4.7. Operational life (reliability).

4.7.1. First article operational life (reliability). First article reliability testing shall be conducted as part of the first article test and inspection schedule. First article samples shall not be considered as part of the overall procurement quantities. The first article reliability test plan shall be in accordance with a contractor-prepared, Government approved test plan.

4.7.1.1. Test item. Type I units only.

4.7.1.2. Test level.

Temperature +50° C (+5 -0° C)

Temperature cycling: none

Vibration: 2.2g ±10% peak acceleration value at any non-resonant frequency between 20 and 60 Hz measured at the mounting points of the equipment. The duration of vibration shall be at least 10 minutes during each hour of equipment operating time. The vibration shall be normal to the plane of the LED.

Equipment ON-OFF cycling: Turn OFF 10 to 15 minutes during 3 hour cycle.

Duration: 500 hours on each sample.

4.7.1.3. Failure Criteria. A failure is defined as any malfunction which causes or may cause inability to commence operation, cessation of operation or degradation below performance limits specified for the equipment. Ambient temperature tests 4.5.1, 4.5.2, and 4.5.4 shall be performed at least once prior to and after the test. Failure of any sample unit to meet the requirements of 3.6.1, 3.6.2, or 3.6.4 shall constitute failure of this test. Radiated power output requirement of 3.6.1 may be degraded by 20% maximum.

4.8. Visual and mechanical. A major defect is a defect, other than critical, that is likely to result in failure or to reduce materially the usability of the unit of product for its intended purpose. A minor defect is a defect that is not likely to reduce materially the usability of the unit of product for its intended purpose, or is a departure from established standards having little bearing on the effective use or operation of the unit. Visual and mechanical defects pertain to soldering, soldering defects peculiar to printed wiring assemblies, solderless connectors, cabling and wiring, fasteners, hardware and assembly, foreign objects, short circuit, finish, marking, parts, contacts, tools, transistors and rectifiers, batteries and solderless electrical terminals.

4.9 Weight. Failure to meet the requirement of 3.2.1 shall constitute failure of this test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:54Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When actual packaging of material is to be performed by DoD personnel, these personnel need to contact the responsible packaging activity to ascertain requisite packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activity within the Military Department of Defense Agency, or within the Military Department's System Command. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

6. NOTES

(This section contains information of a general or explanatory nature which may be helpful, but is not mandatory.)

6.1. Intended use. The LED module is intended for use in infrared systems.

6.2. Acquisition requirements. Procurement documents should specify the following:

a. Title, number, date of this specification, and type of LED required (see 1.1)

b. Issue of DoDISS to be cited in the specification and if required, the specific issue of individual documents referenced

c. Packaging requirements (see 5.1)

(1) Time frame for submission of first article test reports when first article tests are required

(2) Time frame for approval of first article test reports when first article tests are required

d. Requirement for contractor-prepared, acceptance test procedure.

6.3 Existing suppliers. Suppliers who are currently supplying equipment to this specification with a minimum average monthly rate of 10 units per month over the most current 12 month period. If a supplier cannot maintain the minimum monthly average, a first article test (less reliability) performed annually may sustain the existing supplier's status when performed on 3 units manufactured by the supplier explicitly for this test. Upon implementation of this specification, suppliers who are then supplying equipment to specification MIL-PRF-49169B (CR), Light-Emitting Diode Array, with minimum monthly delivery rates specified above, may considered as existing suppliers.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:54Z
Check the source to verify that this is the current version before use.

6.4. Subject term (keyword) listing.

shape defect
infrared system

6.5. Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Concluding Material

CUSTODIAN:
Army - CR

PREPARING ACTIVITY:
Army - CR

(Project 5855-0217)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:54Z
Check the source to verify that this is the current version before use.

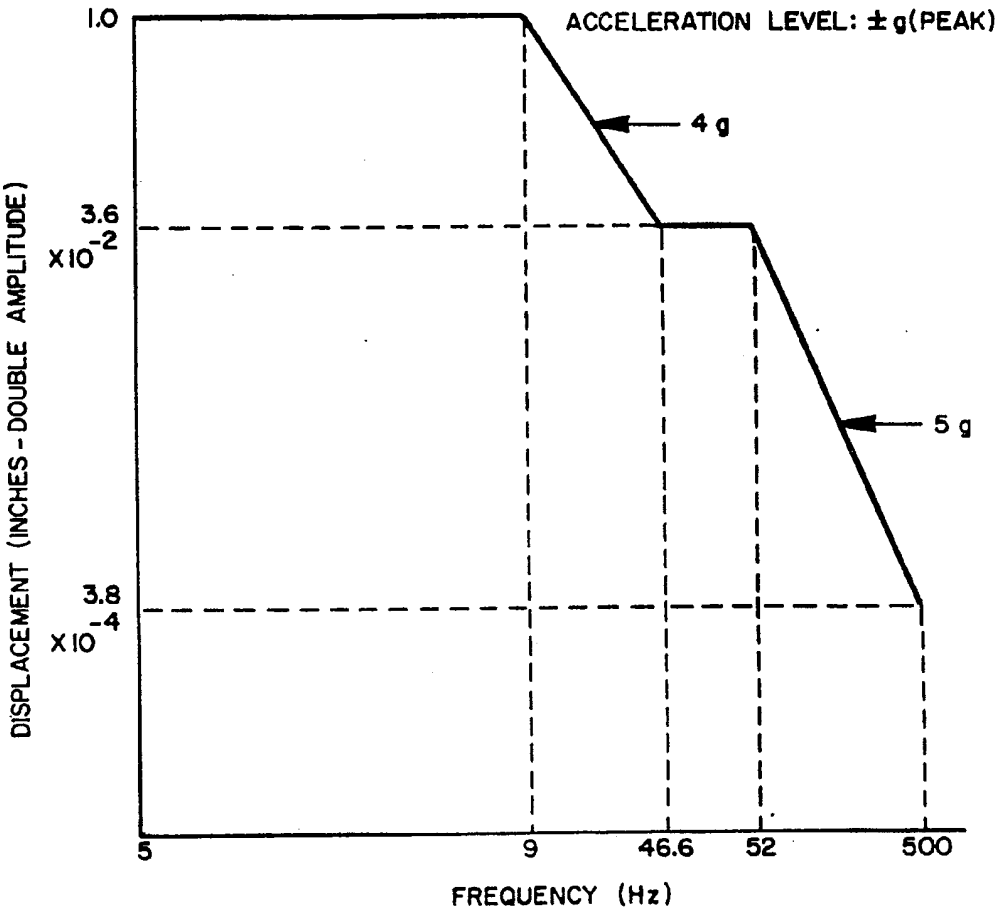


FIGURE 1. VIBRATION TEST PROFILE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:54Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.

2. The submitter of this form must complete blocks 4, 5, 6, and 7.

3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	**1. DOCUMENT NUMBER** MIL-PRF-49169B(CR)	**2. DOCUMENT DATE (YYMMDD)** 990406

3. DOCUMENT TITLE
LIGHT-EMITTING DIODE ARRAY

4. NATURE OF CHANGE (Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME US Army Communications-Electronics Command	b. TELEPHONE (Include Area Code) (1) Commercial (732) 532-9139 (2) AUTOVON 992-9139
c. ADDRESS (Include Zip Code) ATTN: AMSEL-LC-LEO-E-EP Fort Monmouth, NJ 07703-5023	**IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT:** Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:54Z
Check the source to verify that this is the current version before use.