METRIC
MIL-PRF-49170B(CR)
19 MAY 1997
SUPERSEDING
MIL-I-49170A(ER)
11 June 1982

PERFORMANCE SPECIFICATION
OPTICAL IMAGER, SU-97/UA, SU-97A/UA, AND SU-97B/UA

This performance specification is approved for use by USACECOM, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This performance specification covers one type of common module with three changeable models; Optical Imager, SU-97/UA, SU-97A/UA, and SU-97B/UA.

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3 and 4 of this specification. This section does not include documents in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements documents cited in sections 3 and 4 of this specification, whether or not they are listed.

2.2 Government documents.

2.2.1 Handbooks. The following handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of this documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DoDISS) and supplement thereto, cited in the solicitation (see 6.2). Handbooks are for guidance only and therefore are not mandatory.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: HQ, USA Communications-Electronics Command, ATTN: AMSEL-LC-LEO-E-EP, Fort Monmouth, NJ 07703 by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 5855

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:54Z
Check the source to verify that this is the current version before use.

HANDBOOKS

DEPARTMENT OF DEFENSE

MIL-HDBK-454	- Standard general requirements for electronic equipment

(Unless otherwise indicated, copies of the above handbooks are available from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111-5094.)

2.2.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation. Drawings listed below are identified to ensure accurate interface of the item produced under this performance specification with existing hardware.

DRAWINGS

US ARMY COMMUNICATIONS-ELECTRONICS COMMAND

SM-D-806993	- Optical Imager SU-97/UA
SM-D-772258	- Optical Imager SU-97A/UA
SM-D-969555	- Optical Imager SU-97B/UA

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.3 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted are those listed in the issue of the DoDISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DoDISS are the issues of the documents cited in the solicitation (see 6.2).

AMERICAN NATIONAL STANDARDS INSTITUTE (ANSI)

ANSI PH 3.35-1977	- Method of designating and measuring focal lengths and distances of photographic lenses.
ANSI PH 3.29-1979	- Method of designating and measuring apertures and related quantities pertaining to photographic objectives and projection lenses.
ANSI/ASQC Z1.4	- Sampling procedures and Tables for inspection.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:54Z
Check the source to verify that this is the current version before use.

(Application for copies should be addressed to American National Standards Institute, Inc. 1430 Broadway, NY, NY 10018)

2.4 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 First article. When specified in the contract (see 6.2) the contractor shall furnish first article units for inspection (see 4.2).

3.2 Materials. The contractor shall select the materials, but the materials used shall be fully capable of meeting all of the operational and environmental requirements specified herein. The materials specified in the applicable drawings are recommended, but are not mandatory. Selection criteria of the class, grade or type part shall be that the material will be able to perform its intended function when it is assembled. Verification of the supplier meeting the overall performance requirements shall be the governing acceptance standard. Recovered materials shall be used to the maximum extent possible.

3.3 Description. The Optical Imager SU-97/UA, SU-97A/UA, and SU-97B/UA, referred to herein as the imager, consists of thermally compensated optical elements which focus the IR energy from a mechanical scanner onto the detector array of an infrared system. The three models differ in their internal configuration but are identical in performance and external configuration. In system usage, they are, and must be, completely interchangeable.

3.3.1 Design. The imager shall meet the form, fit, function and interface requirements of this specification.

3.3.2 Weight. The weight of the imager shall be 318 grams or under as weighed by a scale with an accuracy of 1% or better.

3.3.3 Dimensions. The imager shall meet the dimensions and dimensional tolerances of drawings SM-D-806993, SM-D-772258 or SM-D-969555 to ensure proper physical mating and operation of the items built under this specification with the existing hardware.

3.4 Components. The number of components comprising the imager shall be held to a minimum consistent with meeting the performance requirements. In this regard, drawings are to be considered as a non-binding guide only.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:54Z
Check the source to verify that this is the current version before use.

3.5 Performance characteristics.

3.5.1 Effective Focal Length (EFL). The EFL of the imager in the 7.6 to 11.75 micrometer spectral region shall be 67.8, ±0.7 millimeters as defined by ANSI PH 3.35, paragraph 4.

3.5.2 f/number. The f/number of the imager shall be f/1.6 or faster, set by the clear aperture of the first lens element (see Figure 3), as defined by ANSI PH 3.29, paragraph 2.6.

3.5.3 Linear Distortion. The geometric (linear) distortion of the imager shall be between 0 to -3 percent at the edge of the field.

3.5.4 Modulation transfer function (MTF). The MTF of the imager shall not be less than the MTF given in Figure 1 as measured in a flat-field focal plane and parallel to surface A in Figure 2. Perform 4.5.4 for acceptance.

3.5.5 Relative Illumination (RI). The RI of the imager at f/2.0 shall not be less than 60 percent at the edge of the field, for a field diameter of 6.5 millimeters at the image plane. Perform 4.5.5 for acceptance.

3.5.6 Flange focal distance (FD). The FD shall be set to a nominal of 50.0, ±0.6 mm at ambient temperature (see 6.4.2). Perform 4.5.6 for acceptance.

3.5.7 Field of view (FOV). The imager shall have a FOV sufficient to fill a circular format with a diameter of 6.5 mm as measured as part of the relative illumination requirement. . Perform 4.5.7 for acceptance.

3.5.8 Optical transmittance. The optical transmittance of the imager, measured in the 7.6 - 11.75 micrometer spectral region shall be at least 85% at ambient temperature (see 6.4.2). Perform 4.5.8 for acceptance.

3.5.9 Deviation. The optical axis of the imager shall not deviate from 90.0 degrees by more than +/- 0.5 degree. Perform 4.5.9 for acceptance.

3.6 Environmental conditions.

3.6.1 Temperature shock. The imager shall not be damaged (see 6.4.1) by sudden changes in temperature between -54°C and +71°C.

3.6.2 High temperature. The imager shall not be damaged by storage to +95°C or operation to +71°C.

3.6.3 Low temperature. The imager shall not be damaged by operation to -54°C or storage to -62°C.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:54Z
Check the source to verify that this is the current version before use.

3.6.4 Shock. The imager shall not be damaged by high intensity shocks of 100 g's peak amplitude with 11 milliseconds duration duration and by bench handling tests.

3.6.5 Vibration. The imager shall not be damaged after sustaining vibration over a frequency spectrum at the specified g levels and amplitudes shown in Figure 3 (see 6.4.1).

3.6.6 Altitude. The imager shall not be damaged by operation at altitudes up to 10,000 feet above sea level or storage to 10,000 feet above sea level or storage to 50,000 feet above sea level.

3.7 Treatment and painting. Unless otherwise specified, the imager shall have an external surface of a composition or surface treatment which will prevent rust, corrosion, and fungus growth in the full range of environmental requirements. External color and surface shine shall reduce light reflection and reduce recognition. Adherence must be assured through the full range of environmental and use factors.

3.8 Nameplates and product marking. The imager, parts, components, subassemblies, and assemblies thereof shall be marked for identification and reference designation markings. For guidance, use MIL-HDBK-454.

3.9 Workmanship. All parts shall be free of material defects such as bubbles, seeds, cracks, feathers, milkiness and other imperfections. Manufacturing defects such as blisters, burns, chips, dirt and other like defects shall be cause for rejection of the component or final assembly.

4. VERIFICATION

4.1 Classification of inspections. Inspections shall be classified as follows:

a. First article inspection (see 4.2).

b. Conformance inspection (see 4.3).

4.2 First article inspection. First article inspection shall be performed by the contractor on a number of samples specified in the contract or purchase order when a first article sample is required (see 6.2). This inspection shall include the examination of 4.2.1 and the tests of 4.2.2.

4.2.1 Visual examination. All materials, parts, and assemblies shall be examined for conformance to the applicable specification or drawing as indicated. Inspections shall be made using ANSI/ASQC Z1.4 sampling procedures.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:54Z
Check the source to verify that this is the current version before use.

TABLE I. Visual inspections.

Inspection	Requirement paragraph	Verification paragraph
Any as specified part or component missing or damaged	3.3, 6.4.1	4.2.1
Dimensions not as specified	3.3.1	4.2.1
Flange diameter (1.998 in. ref)	3.3.1	4.2.1
Flange mounting hole pattern	3.3.1	4.2.1
Weight not as specified	3.3.2	4.2.1
Treatment and painting not as specified	3.7	4.2.1
Marking not as specified	3.8	4.2.1
Workmanship not as specified	3.9	4.2.1

4.2.2 Tests. Upon successful completion of inspections specified in 4.2.1, perform the tests in Table II in any order. Failure to meet any performance requirement shall constitute first article failure.

TABLE II. First article inspection.

Inspection	Requirement paragraph	Test paragraph
Equivalent focal length	3.5.1	4.5.1
f/number	3.5.2	4.5.2
Geometric distortion	3.5.3	4.5.3
Modulation transfer function	3.5.4	4.5.4
Relative illumination	3.5.5	4.5.5
Flange focal distance	3.5.6	4.5.6
Field of view	3.5.7	4.5.7
Optical transmittance	3.5.8	4.5.8
Deviation	3.5.9	4.5.9
Temperature shock	3.6.1	4.6.1
High temperature	3.6.2	4.6.2
Low temperature	3.6.3	4.6.3
Shock	3.6.4	4.6.4
Vibration	3.6.5	4.6.5
Altitude	3.6.6	4.6.6

4.2.3 Disposition of first article samples. First article samples shall not be considered as part of the procurement quantities (see 6.2).

4.3 Conformance inspection.

4.3.1 Inspection. Inspection shall be as specified in 4.2.1.

4.3.2 Group Inspections.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:54Z
Check the source to verify that this is the current version before use.

4.3.2.1 Group A inspection. Group A inspection shall be conducted at an ambient temperature (see 6.4.2) on all imagers following the inspection of 4.3.1. Group A tests listed in Table III may be performed in any order. Failure of any requirement shall be cause for rejection of that unit. Sampling shall be per ANSI/ASQC Z1.4.

TABLE III. Group A inspection.

Inspection	Requirement paragraph	Test paragraph
Modulation transfer function	3.5.4	4.5.4
Flange focal distance	3.5.6	4.5.6

4.3.2.2 Group B inspection. Not required.

4.3.2.3 Group C inspection. Group C inspection shall be conducted on imagers selected from units which have passed the tests in 4.3.2.1. The sample(s) shall be tested in accordance with the inspections listed in Table IV. Samples shall be selected in accordance with 4.3.2.3.1. Group C tests listed in Table IV may be performed in any order.

4.3.2.3.1 Sampling for Group C inspection. Group C inspection samples shall be selected from monthly lots in accordance with ANSI/ASQC Z1.4 and as specified in the contract (see 6.2.f.).

TABLE IV. Group C inspection.

Inspection	Requirement paragraph	Test paragraph
Equivalent focal length	3.5.1	4.5.1
Relative illumination	3.5.5	4.5.5
Optical transmittance	3.5.8	4.5.8
Deviation	3.5.9	4.5.9
Temperature shock	3.6.1	4.6.1
Vibration	3.6.5	4.6.5

4.3.2.3.2 Group C failures. Actions required relative to group C failures shall be as specified in the contract (see 6.2).

4.3.2.3.3 Disposition of Group C samples. Group C samples shall be accepted on contract subsequent to the tests of Table III.

4.4 Examination. Each imager shall be examined for compliance with the requirements specified in 3.3 through 3.9. Any redesign or modification of the contractor's standard product to comply with specified requirements, or any necessary redesign or modification following failure to meet the specified requirements shall receive particular attention for adequacy and suitability. This element of inspection shall encompass all visual examinations and dimensional measurements. Noncompliance with any specified requirements or presence of

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:54Z
Check the source to verify that this is the current version before use.

one or more defects preventing or lessening maximum efficiency shall constitute cause for rejection.

4.5 Methods of inspection. Measurements taken by the contractor during verification testing of all environmental performance requirements shall be accomplished using test apparatus such an environmental test chamber, vibration test table, pendulum shock device or similar equipment which simulate extreme climatic or environmental conditions. For temperature test, test duration shall be a minimum of three (3) cycles for operation and seven (7) cycles for storage at 24 hours for each cycle.

4.5.1 Equivalent focal length (EFL). EFL shall be defined in 3.5.1 and as measured in ANSI PH 3.35, paragraph 4. Measurements falling outside the specified requirements shall be considered a failure.

4.5.2 f/number. f/number shall be as defined in 3.5.2 and as measured in paragraph 2.6 of ANSI PH 3.29. Measurements not in accordance with the specified requirements shall be considered a failure.

4.5.3 Linear distortion. Linear distortion shall be measured. Use of the procedure in 6.2.i(1) is recommended. Distortion outside the requirements of 3.5.3 shall be deemed a failure.

4.5.4 Modulation transfer function (MTF). Using the requirements of Figure 1 and Figure 3, the MTF shall be measured either continuously or in 8 discrete steps from 0 to 16 cycles per millimeter (cy/mm). The MTF test shall be run at infinite conjugates. On-axis MTF shall be measured and shall not be less than the MTF in Figure 1. Off-axis radial MTF shall be measured in the same plane used for the on-axis image parallel to the plane defined by the datum A of Figure 2. The off-axis MTF shall be measured at 2 points in the field 90 degrees apart.

4.5.5 Relative illumination (RI). RI shall be measured. Recommend using the procedure found in 6.2.i(2). RI outside the requirements of 3.5.5 shall be unacceptable. RI shall be measured in 2 mutually perpendicular planes with the first plane measured across the greatest distance of the oval shape of the mirror.

4.5.6 Flange focal distance (FD). FD shall be measured. Recommend using the procedure found in 6.2.i(3). FD falling out of conformance with 3.5.6 shall be considered as being failed. FD shall be measured from datum A in Figure 2 to the flat field plane of best MTF.

4.5.7 Field of view (FOV). The FOV of the IMAGER shall conform to 3.5.7 when measured with optical devices. Recommend using the procedure of 6.2.i(4). FOV falling outside the specified range shall be unacceptable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:54Z
Check the source to verify that this is the current version before use.

4.5.8 Optical transmittance. Measure optical transmittance using optical devices. Recommend use of procedure of 6.2.i(5). Noncompliance with 3.5.8 requirements shall constitute a failure.

4.5.9 Deviation. Deviation shall be measured by determining the angle between the plane of datum A of Figure 2 and the plane of best focus. The plane of best focus is determined by measuring the flange focal distance of four image points of 3.25 mm field height and 90 degrees apart. Best MTF at 10 cy/mm is used to determine the exact location of these points with respect to datum A. Deviation is a vector having components in the x and y directions. The deviation for a single component is determined by the arctangent of the difference in focal positions for opposite sides divided by the distance between the points. The deviation is then the square root of the sum of the squares of the individual components. Failure to meet the requirements of 3.5.9 shall constitute failure of this test.

4.5.10 Optical test conditions. Each imager shall be inspected at an ambient temperature (see 6.4.2). Tests shall be conducted with blackbody/graybody radiation over the 7.6 to 11.75 micrometer region using the configuration shown in Figure 2. The test collimator used shall have a wavefront error of less than 4.0 wavelengths (peak-to-peak) at 632.8 manometers over the clear circular aperture of the unit under test. Linearity of radiometric measurement shall be within 5%. Failure to meet the requirements of 3.5.8 shall constitute failure of this test.

4.6 Environmental tests. Environmental testing shall be performed in accordance with the requirements contained herein, except when a contractor's test plan showing equivalent methods has been approved by the Government contracting office. When the contractor's test plan deviates from the test procedures prescribed, the contractor shall be required to show where his own tests and methods for verifying the specified performance are equivalent. Also, measurements taken by the contractor during verification testing of all environmental requirements shall be accomplished using testing apparatus such as an environmental test chamber, vibration test table, pendulum shock device, or similar equipment for which the technical capabilities to properly simulate extreme climatic or environmental conditions are scientifically documented. The methods for testing to verify compliance with all stated performance characteristics selected by the contractor shall be equivalent to the recommended procedures specified herein.

4.6.1 Temperature shock. Measure compliance with the requirement of 3.6.1. Use of the tests prescribed in 6.3 is recommended. Failure to meet the requirement shall constitute failure of the sample.

4.6.2 High temperature. Measure compliance with the requirement of 3.6.2. Use of the tests prescribed in 6.3 is recommended. Failure to meet the requirement shall constitute failure of the sample.

4.6.3 Low temperature. Measure compliance with the requirement 3.6.3. Use of the tests prescribed in 6.3 is recommended. Failure to meet the requirement shall constitute failure of the sample.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:54Z
Check the source to verify that this is the current version before use.

4.6.4 Shock. Measure compliance with the requirement of 3.6.4. Use of the tests prescribed in 6.3 is recommended. Failure to meet the requirement shall constitute failure of the sample.

4.6.5 Vibration. Measure compliance with the requirement of 3.6.5. Use of the tests prescribed in 6.3 is recommended. Failure to meet the requirement shall constitute failure of the sample.

4.6.6 Altitude. Measure compliance with the requirement of 3.6.6. Use of the test prescribed in 6.3 is recommended. Failure to meet the requirement shall constitute failure of the sample.

5. PACKAGING

5.1 Packaging and Marking. For acquisition purposes, the packaging and marking requirements shall be as specified in the contract or order (see 6.2). When actual packaging of materiel is to be performed by DoD personnel, these personnel need to contact the responsible packaging activity to ascertain requisite packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activity within the Military Department or Defense Agency, or within the Military Department's System Command. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

6. NOTES

(This section contains information of a general of explanatory nature that may be helpful but is not mandatory.)

6.1 Intended use. The imager is intended for use in infrared systems.

6.2 Acquisition requirements. Procurement documents should specify the following:

a. Title, number, and date of this specification.

b. First article tests are required.

(1) Time frame for submission of first article test reports when first article tests are required.
(2) Time frame for approval of first article test reports when first article tests are required.

c. Production delivery schedule.

(1) Defined in terms of monthly lots.
(2) Actions required relative to group C failures (see 4.3.2.3.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:54Z
Check the source to verify that this is the current version before use.

d. Environmental pollution prevention measures are to be considered in the disposal of packaging materials (See MIL-HDBK-742).

e. Address for delivery of first article samples.

f. Group C inspection monthly sample size to be established by the contracting office.

g. Packaging requirements (see 5.1).

h. Issue of DoDISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.2.1 and 2.2.2).

i. Recommended application of MIL-STD-150 for use in measuring optical parameters contained in Section 3. The following applicable paragraphs should apply:

(1) For 4.5.3, see 3.6.6 of MIL-STD-150.
(2) For 4.5.5, see 3.6.7 of MIL-STD-150.
(3) For 4.5.6, see 3.1.7 of MIL-STD-150.
(4) For 4.5.7, see 3.5 of MIL-STD-150.
(5) For 4.5.8, set 3.3.1 of MIL-STD-150.

6.3 Environmental inspection procedures. The test methods and procedures of MIL-STD-810 listed below are recommended, but are not mandatory for determining compliance with the environmental requirements of this specification. The contractor may use any test method that he can verify as providing comparable stress levels on the materiel to be tested.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:54Z
Check the source to verify that this is the current version before use.

TABLE V. Environmental inspection procedures.

Inspection	Req. Para.	MIL-STD-810 Method	MIL-STD-810 Procedure	MIL-STD-810 Remarks
High temperature (storage)	3.6.2	501.1	I	Storage temperature (Step 2) shall be +68° for 6 hours duration.
Low temperature storage	3.6.3	502	I	Storage temperature of Step 2 shall be -51°C for 9 hours. Step 5, “operate”, shall be the ability to meet the requirements of the specification.
Temperature shock	3.6.1	503.1	I	Step 1 & 4 shall be +68°C and Step 2 shall be -51°C. Transition from 65°C -51°C or visa versa shall include a 2 hour stabilization period @ 23°C.
Vibration	3.6.5	514.2	VIII	Use curve V as an alternative use method 201A of MIL-STD-202.
Shock	3.6.4	516.2	II	Time duration: 4 milliseconds
Altitude	3.6.6	500.1	I	Operation @ 40,000 feet above sea-level

6.4 Definitions.

6.4.1 Damage. Breakage, loosening, shifting, evidence of corrosion, or failure of any finish, hardware, connection or component; and any degradation of imager performance to values less than specified herein.

6.4.2 Ambient temperature. Ambient temperature is considered to be +23°C, ± 5°C.

6.5 Subject term (key word) listing.

Detector Array

6.6 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

CUSTODIAN:
Army-CR

PREPARING ACTIVITY:
Army-CR

(Project 5855-0095)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:54Z
Check the source to verify that this is the current version before use.


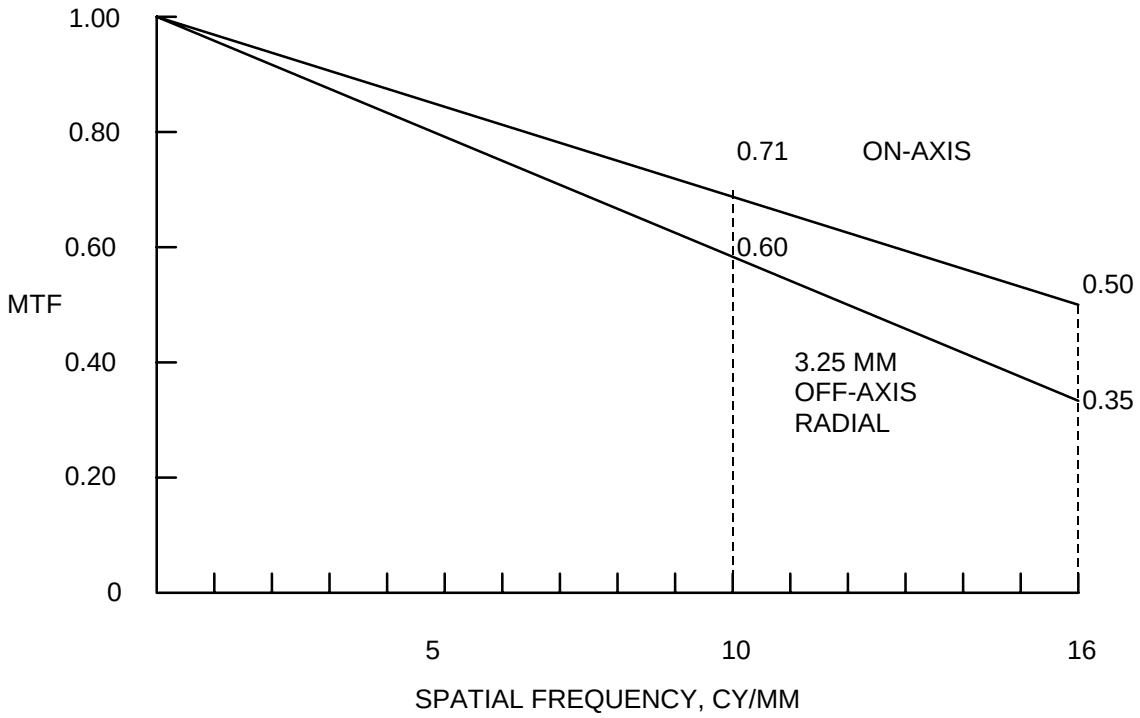


FIGURE 1. MTF Versus Spatial Frequency.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:54Z
Check the source to verify that this is the current version before use.

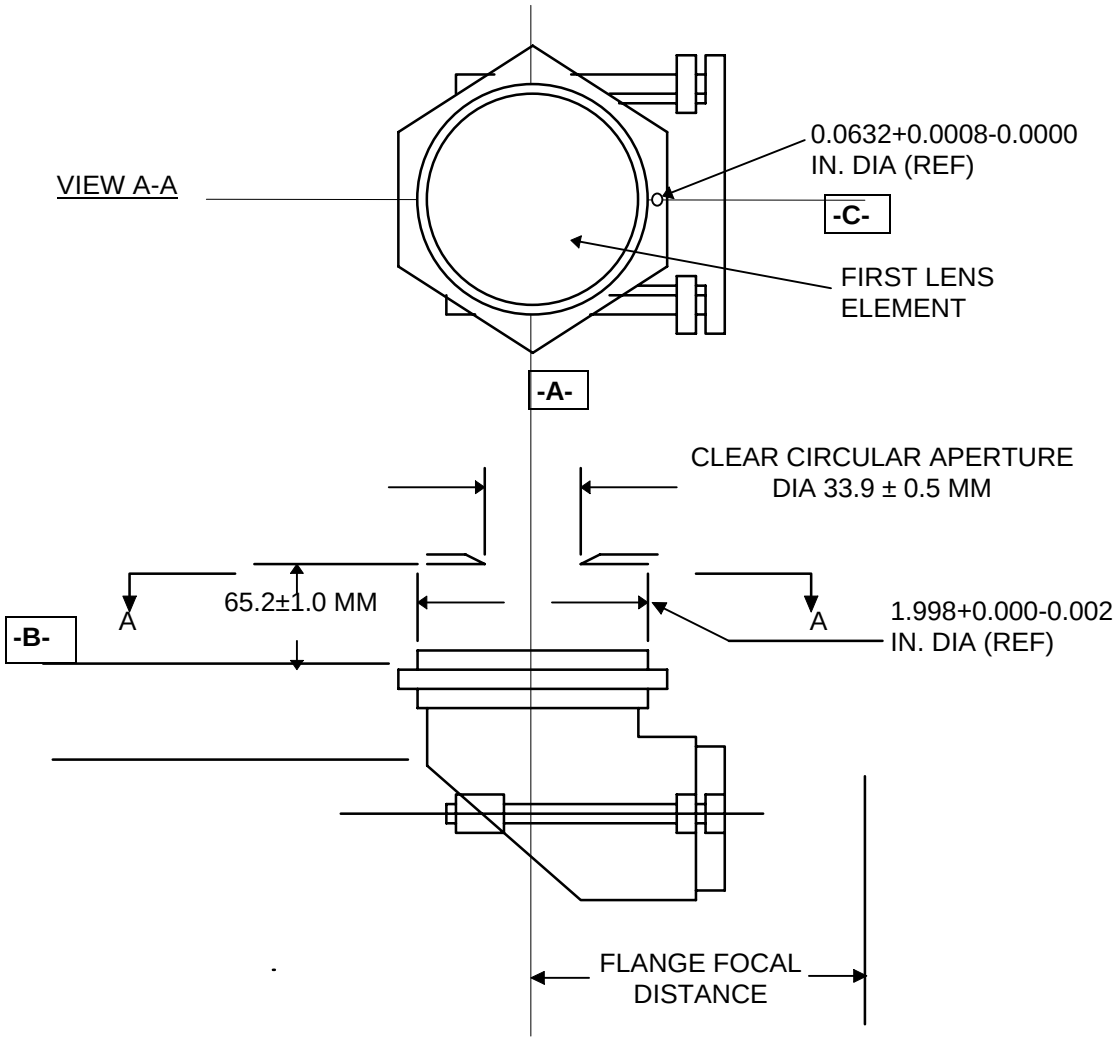

(FOR INTERFACE INFORMATION ONLY)

NOTES:

-A- , **-B-** AND **-C-** ARE THREE MUTUALLY PERPENDICULAR DATUM PLANES SUCH THAT -

1. **-A-** AND **-C-** PASS THRU THE INTERSECTION OF THE 1.998 IN. DIAMETER AND **-B-**
2. **-C-** PASSES THRU THE INTERSECTION OF THE 0.0632 IN. DIAMETER AND **-B-**

FIGURE 2. Imager Inspection Configuration.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:54Z
Check the source to verify that this is the current version before use.

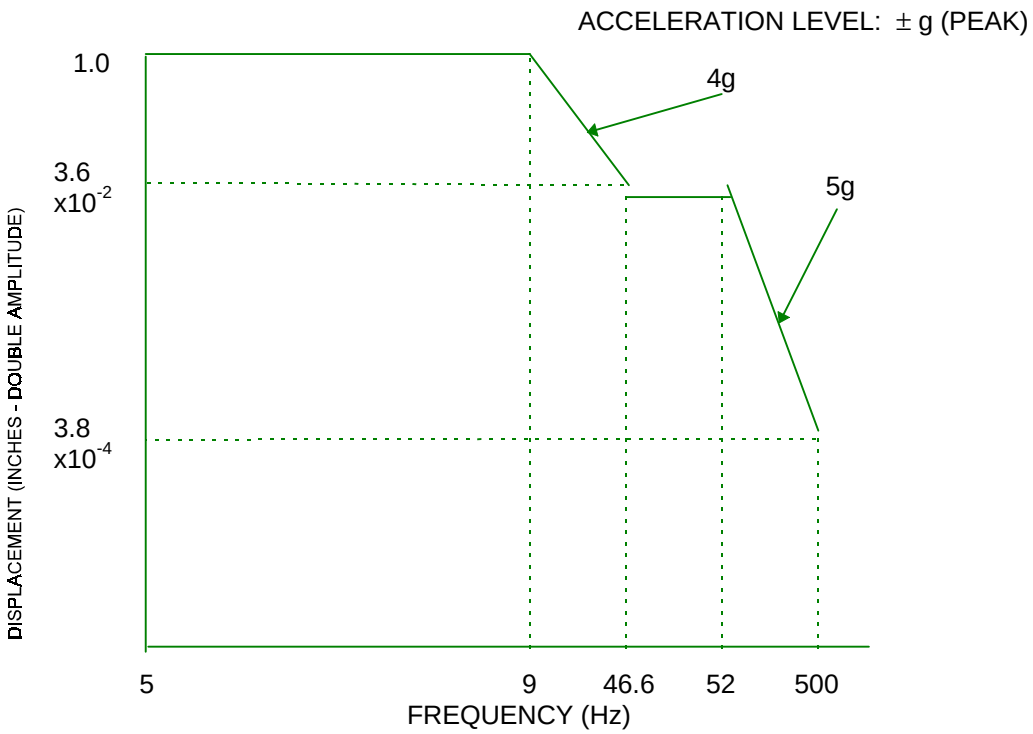


FIGURE 3. Vibration Inspection Profile

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:54Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.

2. The submitter of this form must complete blocks 4, 5, 6, and 7.

3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	**1. DOCUMENT NUMBER** MIL-PRF-49170B	**2. DOCUMENT DATE (YYMMDD)** 970519

3. DOCUMENT TITLE OPTICAL IMAGER, SU-97/UA, SU-97A/UA, AND SU-97B/UA

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME *(Last, First, Middle Initial)*	b. ORGANIZATION	
c. ADDRESS *(Include Zip Code)*	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON *(if applicable)*	**7. DATE SUBMITTED** (YYMMDD)

8. PREPARING ACTIVITY

a. NAME ROGER LOUISAIRE	b. TELEPHONE *Include Area Code)* (1) Commercial (732) 532-2735 (2) AUTOVON 992-2735
c. ADDRESS *(Include Zip Code)* US ARMY COMMUNICATIONS-ELECTRONICS COMMAND, ATTN: AMSEL-LC-LEO-E-EP FORT MONMOUTH, NJ 07703-5023	**IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT:** DEFENSE QUALITY AND STANDARDIZATION OFFICE 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22401-3466 Telephone (703) 756-2340 AUTOVON 289-2340

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:54Z
Check the source to verify that this is the current version before use.