METRIC
MIL-PRF-49173B(CR)
19 MAY 1997
SUPERSEDING
MIL-I-49173A(ER)
11 JUNE 1982

PERFORMANCE SPECIFICATION
OPTICAL IMAGER, SU-103/UA and SU-103A/UA

This performance specification is approved for use by USACECOM, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This performance specification covers one type of common module, Optical Imager SU-103/UA and SU-103A/UA.

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3 and 4 of this specification. This section does not include documents in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements documents cited in sections 3 and 4 of this specification, whether or not they are listed.

2.2 Government documents.

2.2.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DoDISS) and supplement thereto, cited in the solicitation (see 6.2).

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: HQ, USA Communications-Electronics Command, ATTN: AMSEL-LC-LEO-E-EP, Fort Monmouth, NJ, 07703-5023, by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 5855
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:54Z
Check the source to verify that this is the current version before use.

STANDARDS

DEPARTMENT OF DEFENSE

MIL-STD-810 - Environmental Testing and Engineering Guidelines

(Unless otherwise indicated, copies of the above handbooks are available from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA, 19111-5094).

2.2.2 Other Government documents, drawings and publications. The following other Government documents, drawings, and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

DRAWINGS

US ARMY COMMUNICATIONS-ELECTRONICS COMMAND

SM-D-804143	- Imager, Optical SU-103/UA
SM-D-969565	- Imager, Optical SU-103A/UA
SM-D-773420	- Housing, IR Imaging Module
SM-D-773603	- Flange, Mounting

(Copies of specifications, standards, drawings and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer).

2.3 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted are those listed in the issue of the DoDISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DoDISS are the issues of the documents cited in the solicitation (see 6.2).

AMERICAN NATIONAL STANDARDS INSTITUTE (ANSI)

ANSI PH 3.35	- Method of Designating and Measuring Focal Lengths and Distances of Photographic Lenses.
ANSI PH 3.29	- Method of Designating and Measuring Apertures and Related Quantities pertaining to Photographic Objectives and Projection Lenses.
ANSI/ASQC Z 1.4	- Sampling Procedures and Tables for Inspection.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:54Z
Check the source to verify that this is the current version before use.

(Application for copies should be addressed to: American National Standards Institute, Inc. 1430 Broadway, NY, NY, 10018).

2.4 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 First article. When specified in the contract (see 6.2) the contractor shall furnish first article units for inspection (see 4.2).

3.2 Materials. The contractor shall select the materials, but the materials used shall be fully capable of meeting all of the operational and environmental requirements specified herein. The materials specified in the applicable drawings are recommended, but are not mandatory. Selection criteria of the class, grade or type part shall be that the material will be able to perform its intended function when it is assembled. Verification of the supplier meeting the overall performance requirements shall be the governing acceptance standard. Recovered materials shall be used to the maximum extent possible.

3.3 Description. The Optical Imager, SU-103/UA and SU-103A/UA, referred to herein as the “Imager”, consists of thermally compensated optical elements which focus the IR energy from a mechanical scanner onto the detector array of an infrared system. The two models differ in their internal configuration but are identical in performance and external configuration. In system usage, they are completely interchangeable.

3.3.1 Design. The Imager shall meet the form, fit, function and interface requirements specified herein.

3.3.2 Dimensions. The Imager shall have the dimensions and dimensional tolerances specified on Drawing SM-D-804143 for the SU-103/UA or SM-D-969565 for the SU-103A/UA to ensure proper physical interface with existing hardware. Dimensions of the mounting flange and housing for both versions shall be in accordance with Drawings SM-D-773420 and SM-D-773603 to ensure proper interface with existing hardware.

3.3.3 Weight. The weight of the Imager shall be 522.1 grams or less when weighed with a scale having an accuracy of 1% or greater.

3.4 Components. The number of components comprising the imager shall be held to a minimum consistent with meeting the performance requirements. Drawings are to be considered as a guide, except for those cited for dimensions in 3.3.2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:54Z
Check the source to verify that this is the current version before use.

3.5 Performance characteristics.

3.5.1 Effective Focal Length (EFL). The EFL of the Imager in the 7.6 to 11.75 micrometer spectral region shall be 67.8 mm, ± 0.7 mm at the nominal flange focal distance (see 3.5.6) is defined by ANSI PH 3.35, paragraph 4.

3.5.2 f/number. The f/number of the Imager shall be f/1.19 or faster, set by the clear aperture of the first lens element (see Figure 3) as defined by ANSI PH 3.29, paragraph 2.6.

3.5.3 Linear distortion. The linear distortion of the Imager shall be between 0 to -3 percent at the edge of the field.

3.5.4 Modulation transfer function (MTF). The MTF of the Imager shall not be less than the MTF given in Figure 1.

3.5.5 Relative Illumination (RI). The RI of the Imager shall not be less than 60 percent at the edge of the field for a field diameter of 20 millimeters at the image plane.

3.5.6 Flange focal distance (FD). The FD shall be set to a nominal of 17.71 mm, and be adjustable ± 0.47 mm at ambient temperature (see 6.5.2).

3.5.7 Field of view (FOV). The imager shall have a field of view sufficient to fill a circular format with a diameter of 20 mm.

3.5.8 Optical transmittance. The optical transmittance of the Imager, measured in the 7.6 - 11.75 micrometer spectral region shall be at least 85% at ambient temperature (see 6.5.2).

3.5.9 Deviation. The optical axis of the imager shall not deviate from 90.0 degrees by more than ± 0.5 degree.

3.6 Environmental conditions.

3.6.1 Temperature shock. The Imager shall not be damaged by sudden changes in temperature between -54°C and +95°C (see 6.5.1).

3.6.2 High temperature. The Imager shall not be damaged by storage to +95°C or operation to +71°C (see 6.5.1).

3.6.3 Low temperature. The Imager shall not be damaged by operation to -54°C or storage to -62°C (see 6.5.1).

3.6.4 Shock. The Imager shall not be damaged by high intensity shocks of 100 “g’s” peak amplitude with 11 milliseconds duration (see 6.5.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:54Z
Check the source to verify that this is the current version before use.

3.6.5 Vibration. The Imager shall not be damaged after sustaining vibration over a frequency spectrum at the specified “g” levels and amplitudes shown in Figure 3 (see 6.5.1).

3.6.6 Altitude. The Imager shall not be damaged by operation at altitudes up to 10,000 feet above sea level or storage to 50,000 feet above sea level (see 6.5.1).

3.6.7 Test methods. Measurements taken by the contractor during verification testing of all environmental performance requirements shall be accomplished using commercially accepted test apparatus such as an environmental test chamber, vibration test table, pendulum shock device or similar equipment which simulate extreme climatic or environmental conditions. For temperature tests, test duration shall be a minimum of three (3) cycles for operation and seven (7) cycles for storage at 24 hours for each cycle.

3.7 Treatment and painting. Unless otherwise specified, the Imager shall have an external surface of a composition or surface treatment which will prevent rust, corrosion and fungus growth in the full range of environmental requirements. External color and surface shine shall reduce light reflection and reduce recognition. Adherence must be assured through the full range of environmental and use factors.

3.8 Nameplates and product marking. The Imager shall be marked for identification as shown in View B of Drawing SM-D-773420. Marking shall consist of the following:

80063-SM-D-773420
80063 ASSY SM-D-804143 (or SM-D-969565)
MFR xxxxx (CAGE Code)

Marking shall be in contrasting letters when compared to the background with a minimum letter height of 0.06 mm.

3.9 Workmanship. All electronic parts, components, assemblies or sub-assemblies shall be free of smudges, excess solder, metal chips or the existence of any foreign material on any surface. Bearing assemblies shall be free from rust, dirt or tool marks. Wires or integrated circuitry shall be protected from contact with rough or irregular surfaces and be shielded from shorting. All optical parts shall be free of material defects such as bubbles, seeds, cracks, feathers, milkiness and other imperfections. Manufacturing defects such as blisters, burns, chips, dirt and other like defects shall be cause for rejection of the component or final assembly.

4. VERIFICATION

4.1 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.2)

b. Conformance inspection (see 4.3).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:54Z
Check the source to verify that this is the current version before use.

4.2 First article inspection. When first article testing is required, the first article inspection shall be performed by the contractor on the number of samples specified in the contract or purchase order (see 6.2). Sampling procedures and sampling size shall be per ANSI/ASQC Z 1.4. This inspection shall include the examination of 4.5 and the tests of 4.3.2.

4.2.1 Visual examination. All materials, parts and assemblies shall be examined for conformance to the applicable specification or drawing as indicated. Inspections shall be made using ANSI/ASQC Z 1.4 sampling procedures.

TABLE I. Visual inspections

Inspection	Requirement paragraph	Verification paragraph
Any specified part or component missing or damaged	3.3	4.2.1
Dimensions not as specified	3.3.1	4.2.1
Flange diameter	3.3.1	4.2.1
Flange mounting hole pattern	3.3.1	4.2.1
Weight not as specified	3.3.2	4.2.1
Treatment and painting not as specified	3.7	4.2.1
Marking not as specified	3.8	4.2.1
Workmanship not as specified	3.9	4.2.1

4.2.2 Tests. Upon successful completion of inspections specified in 4.2.1, perform the tests of Table II in any order. Failure to meet any performance requirement shall constitute first article failure.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:54Z
Check the source to verify that this is the current version before use.

TABLE II. First article inspection.

Inspection	Requirement paragraph	Test paragraph
Equivalent focal length	3.5.1	4.5.1
f/number	3.5.2	4.5.2
Geometric distortion	3.5.3	4.5.3
Modulation transfer function	3.5.4	4.5.4
Relative illumination	3.5.5	4.5.5
Flange focal distance	3.5.6	4.5.6
Field of view	3.5.7	4.5.7
Optical transmittance	3.5.8	4.5.8
Deviation	3.5.9	4.5.9
Temperature shock	3.6.1	4.6.1
High temperature	3.6.2	4.6.2
Low temperature	3.6.3	4.6.3
Shock	3.6.4	4.6.4
Vibration	3.6.5	4.6.5
Altitude	3.6.6	4.6.6

4.2.3 Disposition of first article samples. First article samples shall not be considered as part of the procurement quantities (see 6.2).

4.3 Conformance inspection. Conformance inspection shall include the examination of 4.4 and Group inspections of 4.3.2.

4.3.1 Inspection. Inspection shall be as specified in 4.2.1.

4.3.2 Group inspections.

4.3.2.1 Group A inspection. Group A inspection shall be conducted at ambient temperature (see 6.5.2) on all imagers following the inspection of 4.2.1. Group A tests listed in Table III may be performed in any order. Failure of any requirement shall be cause for rejection of that unit. Sampling shall be selected from monthly lots in accordance with ANSI/ASQC Z 1.4.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:54Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection.

Inspection	Requirement paragraph	Test paragraph
Modulation transfer function	3.5.4	4.5.4
Flange focal distance	3.5.6	4.5.6

4.3.2.2 Group B inspection. Not required.

4.3.2.3 Group C inspection. Group C inspection shall be conducted on imagers selected from units which have passed the tests in 4.3.2.1. The sample(s) shall be tested in accordance with the inspections listed in Table IV. Samples shall be selected in accordance with 4.3.2.3.1. Group C tests listed in Table IV may be performed in any order. Failure of any requirement shall be cause for rejection of that unit.

4.3.2.3.1 Sampling for Group C inspection. Group C inspection samples shall be selected from monthly lots in accordance with ANSI/ASQC Z 1.4 and as specified in the contract (see 6.2.f).

TABLE IV. Group C inspection.

Inspection	Requirement paragraph	Test paragraph
Equivalent focal length	3.5.1	4.5.1
Relative illumination	3.5.5	4.5.5
Optical transmittance	3.5.8	4.5.8
Deviation	3.5.9	4.5.9
Temperature shock	3.6.1	4.6.1
Vibration	3.6.5	4.6.5

4.3.2.3.2 Group C failures. Actions required relative to group C failures shall be as specified in the contract (see 6.2).

4.3.2.3.3 Disposition of Group C samples. Group C samples shall be accepted on contract subsequent to the tests of Table III.

4.4 Examination. Each imager shall be examined for compliance with the requirements specified in 3.3 through 3.9. Any redesign or modification of the contractor's standard product to comply with specified requirements or any necessary redesign or modification following failure to meet the specified requirements shall receive particular attention for adequacy and suitability. This element of inspection shall encompass all visual examinations and dimensional measurements. Noncompliance with any specified requirements or presence of one or more defects preventing or lessening maximum efficiency shall constitute cause for rejection.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:54Z
Check the source to verify that this is the current version before use.

4.4.1 Test conditions. Each imager shall be inspected at ambient temperature (see 6.5.2). Tests shall be conducted with blackbody/graybody radiation over the 7.6 to 11.75 micrometer region using the configuration shown in Figure 2. The test collimator used shall have a wavefront error of less than 4.0 wavelengths (peak-to-peak) at 632.8 manometers (Ref) over the clear circular aperture of the unit under test. Linearity of radiometric measurement setups shall be within 5 percent.

4.5 Methods of inspection. The contractor/supplier may use his own test methods, measuring devices, tools, fixtures and other equipment during the conduct of verification testing. This specification cites no specific testing procedure as long as all the performance requirements per Section 3 are fully verified as being met.

4.5.1 Effective Focal Length (EFL). Measure compliance with 3.5.1. Recommend using procedures found in 6.3. Failure to meet the requirement shall constitute failure of the sample.

4.5.2 f/number. Measure compliance with 3.5.2. Recommend using procedures found in 6.3. Failure to meet the requirement shall constitute failure of the sample.

4.5.3 Linear distortion. Measure compliance with 3.5.3. Recommend using procedures found in 6.3. Failure to meet the requirement shall constitute failure of the sample.

4.5.4 Modulation transfer function (MTF). The MTF shall be measured either continuously or in eight (8) discrete steps from 0 to 16 cycles per millimeter (cy/mm). The MTF test shall be run at infinite conjugates. On-axis MTF shall be measured and shall not be less than the MTF in Figure 1. Off-axis radial MTF shall be measured in the same plane used for the on-axis image parallel to the plane defined by the datum A of Figure 2. The off-axis MTF shall be measured at two (2) points in the field 90 degrees apart. Failure to meet the requirement (3.5.4) shall constitute failure of the sample.

4.5.5 Relative Illumination (RI). RI shall be measured in two (2) mutually perpendicular planes with the first plane measured across the greatest distance of the oval shape of the mirror. Failure to meet the requirement (3.5.5) shall constitute failure of the sample.

4.5.6 Flange focal distance (FD). FD shall be measured from datum A in Figure 2 to the flat field plane of the best MTF. Failure to meet the requirement (3.5.6) shall constitute failure of the sample.

4.5.7 Field of view (FOV). Measure FOV as part of the relative illumination requirement of 4.5.5. Failure to meet the requirement (3.5.7) shall constitute failure of the sample.

4.5.8 Optical transmittance. Measure optical transmittance. Failure to meet the requirement (3.5.8) shall constitute failure of the sample.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:54Z
Check the source to verify that this is the current version before use.

4.5.9 Deviation. Measure to ensure compliance with 3.5.9. Deviation is measured by determining the angle between the plane of datum A of Figure 2 and the plane of best focus. The plane of best focus is determined by measuring the flange focal distance of four image points of 3.25 mm field height and 90 degrees apart. Best MTF at 10 cy/mm is used to determine the exact location of these points with respect to datum A. Deviation is a vector having components in the x and y directions. The deviation for a single component is determined by the arctangent of the difference in focal positions for opposite sides divided by the distance between the points. The deviation is then the square root of the sum of the squares of the individual components. Failure to meet the requirement shall constitute failure of the sample.

4.6 Environmental tests. Environmental testing shall be performed in accordance with MIL-STD-810, except when a contractor's test plan showing equivalent methods has been approved by the Government. The methods for testing to verify compliance with all stated performance characteristics selected by the contractor shall be equivalent to the recommended procedures specified herein.

4.6.1 Temperature shock. Measure compliance with the requirement of 3.6.1. Recommend using the tests prescribed in 6.4. Failure to meet the requirement shall constitute failure of the sample.

4.6.2 High temperature. Measure compliance with the requirement of 3.6.2. Recommend using the tests prescribed in 6.4. Failure to meet the requirement shall constitute failure of the sample.

4.6.3 Low temperature. Measure compliance with the requirement 3.6.3. Recommend using the tests prescribed in 6.4. Failure to meet the requirement shall constitute failure of the sample.

4.6.4 Shock. Measure compliance with the requirement of 3.6.4 . Recommend using the tests prescribed in 6.4. Failure to meet the requirement shall constitute failure of the sample.

4.6.5 Vibration. Measure compliance with the requirement of 3.6.5. Recommend using the tests prescribed in 6.4. Failure to meet the requirement shall constitute failure of the sample.

4.6.6 Altitude. Measure compliance with the requirement of 3.6.6. Recommend using the test prescribed in 6.4. Failure to meet the requirement shall constitute failure of the sample.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:54Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Packaging. For acquisition purposes, the packaging and marking requirements shall be as specified in the contract or order (see 6.2). When actual packaging of materiel is to be performed by DoD personnel, these personnel need to contact the responsible packaging activity to ascertain requisite packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activity within the Military Department or Defense Agency, or within the Military Department's System Command. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products or by contacting the responsible packaging activity.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory).

6.1 Intended use. The Imager is intended for use in infrared systems.

6.2 Acquisition requirements. Procurement documents should specify the following:

a. Title, number and date of the specification.

b. Issue of DoDISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1).

c. Packaging requirements (see 5.1).

d. If first article tests are required, the following should be specified;

(1) Time frame for submission of first article test reports when first article tests are required.

(2) Time frame for approval of first article test reports when first article tests are required.

e. Production delivery schedule.

(1) Defined in terms of monthly lots.
(2) Actions required relative to Group C failures (see 4.3.2.3.2).

e. Address for delivery of first article samples.

f. Group C inspection monthly sample size should be established in the contract or purchase order.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:54Z
Check the source to verify that this is the current version before use.

6.3 Optical measurements for verification. Recommend application of MIL-STD-150 for the conduct of all acceptance testing of the optical performance characteristics. The following paragraphs of MIL-STD-150 may apply:

a. Equivalent focal length (EFL). Use paragraph 4.5.1
b. f/number. Use paragraph 4.5.2
c. Relative Illumination (RI). Use paragraph 4.5.5
d. Flange Focal Distance (FD). Use paragraph 4.5.6
e. Field of View (FOV). Use paragraph 4.5.7
f. Optical transmittance. Use paragraph 4.5.8

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:54Z
Check the source to verify that this is the current version before use.

6.4 Environmental inspection procedures. The test methods and procedures of MIL-STD-810 listed below are recommended, but not mandatory for determining compliance with the environmental requirements of this specification. The contractor may use any test method that he can verify as providing comparable stress levels on the material to be tested.

Inspection	Spec paragraph	MIL-STD-810 Method	MIL-STD-810 Procedure	Remarks
Temperature shock	3.6.1	503.1	I	Steps 1 & 4 shall be +71°C and Step 2 shall be -54°C. Transition form +71°C to -51°C and from -51°C to 71°C shall include a 2 hour stabilization period at +23°C.
High temperature	3.6.2	501.1	I	Storage temperature (Step 2) shall be +95°C and operation temperature shall be +71°C. Test shall be for 6 hours.
Low temperature	3.6.3	502	I	Storage temperature (Step 2) shall be -62°C for 9 hours. Step 4 for operation shall be -54°C for 9 hours.
Shock	3.6.4	516.2	II	Time duration is 11 milliseconds.
Vibration	3.6.5	514.2	VIII	Use Curve V. Use Method 201A of MIL-STD-202 as an alternative. (See Figure 3).
Altitude	3.6.6	500.1	I	Operator altitude chamber @ 10,000/ft above sea level for operation and 40,000 feet above sea level (Step 2) for 3 hours.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:54Z
Check the source to verify that this is the current version before use.

6.5. Definitions.

6.5.1 Damage. Breakage, loosening, shifting, evidence of corrosion, or failure of any finish, hardware, connection or component; and any degradation of imager performance to values less than specified herein.

6.5.2 Ambient temperature. Ambient temperature is considered to be +23°C, ± 5°C.

6.6 Subject term (key word) listing.

Optical Images
Detector Array

6.7 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

CUSTODIAN:
Army - CR

PREPARING ACTIVITY:
Army - CR

(Project 5855-0096)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:54Z
Check the source to verify that this is the current version before use.

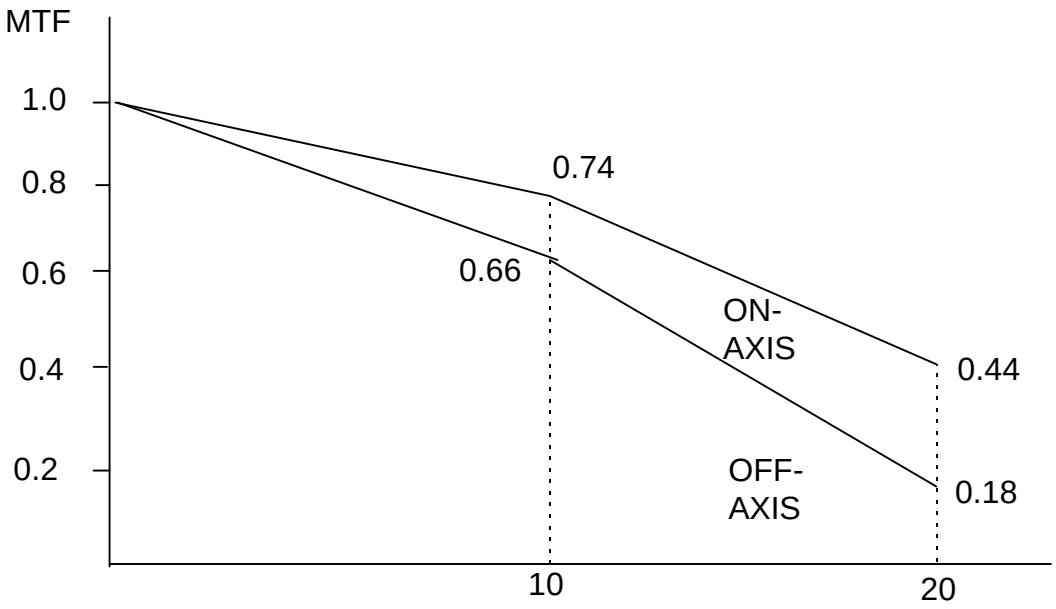


FIGURE 1. Imager MTF VS Spatial Frequency.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:54Z
Check the source to verify that this is the current version before use.

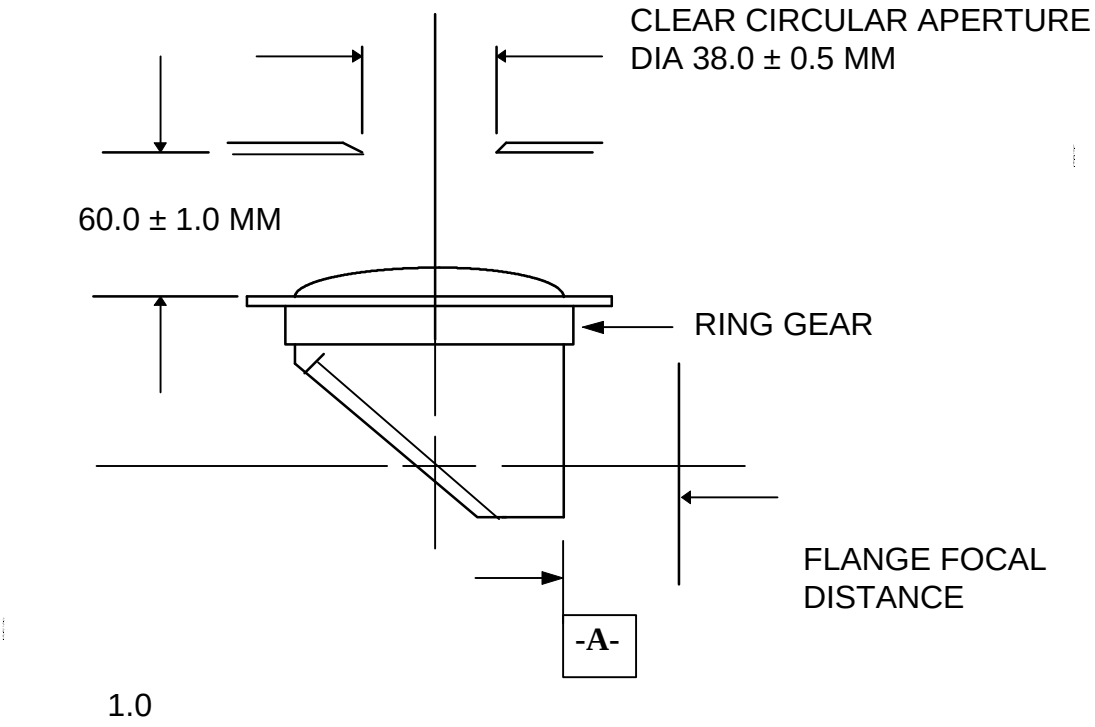


FIGURE 2. Imager Aperture Stop.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:54Z
Check the source to verify that this is the current version before use.

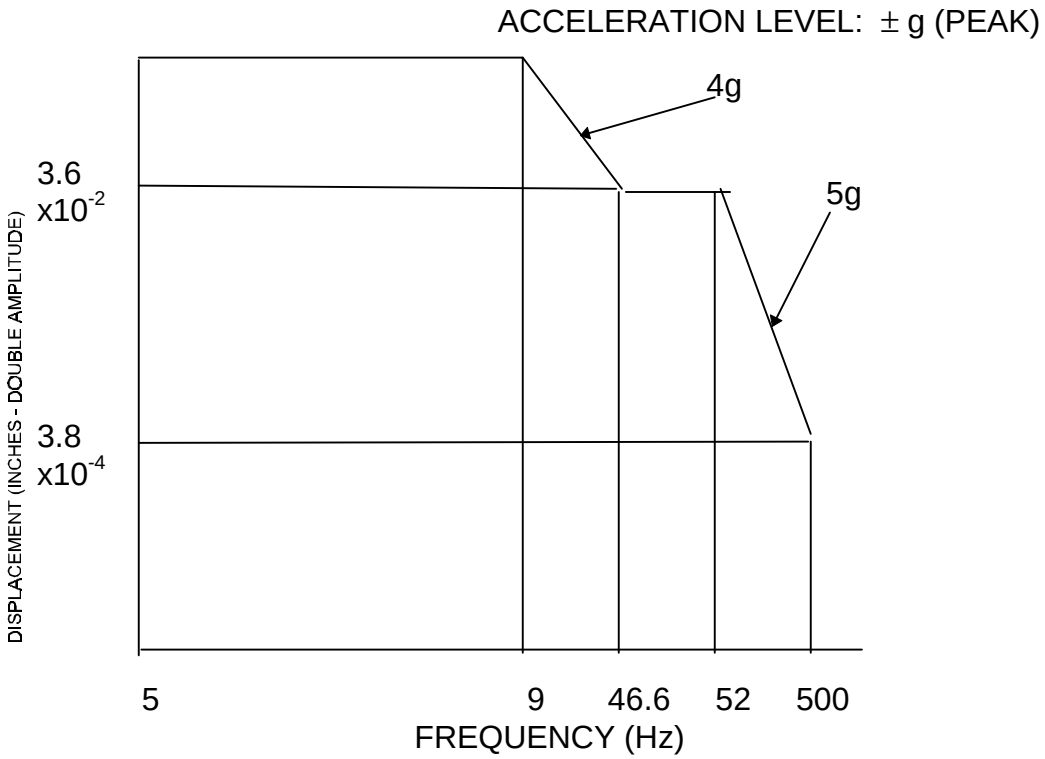


FIGURE 3. Vibration Inspection Profile.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:54Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.

2. The submitter of this form must complete blocks 4, 5, 6, and 7.

3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	**1. DOCUMENT NUMBER** MIL-PRF-49173A	**2. DOCUMENT DATE (YYMMDD)** 97/05/19

3. DOCUMENT TITLE OPTICAL IMAGER, SU-103/UA AND SU-103A/UA

4. NATURE OF CHANGE (Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME US Army Communications-Electronics Command	b. TELEPHONE (Include Area Code) (1) Commercial (732) 532-9913 (2) AUTOVON 992-9913
c. ADDRESS (Include Zip Code) ATTN: AMSEL-LC-LEO-E-EP Fort Monmouth, NJ 07703-5023	**IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT:** Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:54Z
Check the source to verify that this is the current version before use.