The documentation and process conversion measures necessary to comply with this revision shall be completed by 3 November 2003.

INCH-POUND

MIL-PRF-19500/168F
1 August 2003
SUPERSEDING
MIL-PRF-19500/168E
17 October 1998

PERFORMANCE SPECIFICATION

* SEMICONDUCTOR DEVICE, THYRISTORS (CONTROLLED RECTIFIERS), SILICON, TYPES 2N1771A, 2N1772A, 2N1774A, 2N1776A, 2N1777A, 2N1778A, 2N2619A, JAN, JANTX, AND JANTXV

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the performance requirements for PNPN, silicon power, reverse-blocking triode thyristors. Three levels of product assurance are provided for each device type as specified in MIL-PRF-19500.

1.2 Physical dimensions. See figure 1 (similar to TO-64).

1.3 Maximum ratings.

| Limits | $I_O$ (1) $T_C$ = +105°C (180° condition angle) | $I_{TSM}$ (2) | $V_{GM}$ | $T_{op}$ | $T_{STG}$ | $dv/dt$ (3) (repetitive) |
|---|---|---|---|---|---|---|
| | A | A | V(pk) | °C | °C | v/µs |
| Min | | | | -65 | -65 | 5 |
| Max | 4.7 | 60 | 10 | +150 | +150 | |

(1) This average forward current is for a maximum case temperature of +105°C, and 180 electrical degrees of conduction.
(2) Surge rating is non-recurrent and applies only with device in the 'on' conducting state. The peak rate of surge current must not exceed 40 amperes/microsecond during the first 10 µs after switching from the "off" (blocking) state to the "on" (conducting) state. This time is measured from the point where the thyristor voltage has decayed to 90 percent of its initial blocking value.
(3) $T_C$ = -65°C to +150°C.

1.4 Primary electrical characteristics.

| Limits | $V_{TM}$ | $I_H$ | $V_{GT}$ (1) | $I_{GT}$ (1) | $t_{off}$ (1) | $t_{on}$ |
|---|---|---|---|---|---|---|
| | V | mA dc | V dc | mA dc | µs | µs |
| Min | | | 0.2 | | | |
| Max | 1.85 | 25 | 2.0 | 30 | 30 | 5 |

(1) $T_C$ = -65° to +150°C.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Defense Supply Center, Columbus, ATTN: DSCC-VAC, P.O. Box 3990, Columbus, OH 43216-5000, by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.


DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:29Z
Check the source to verify that this is the current version before use.

* 1.4.1 Individual ratings.

| Types | $V_{RRM}$ | $V_{DRM}$ |
|---|---|---|
| | V(pk) (1) | V(pk) |
| 2N1771A | 50 | 50 |
| 2N1772A | 100 | 100 |
| 2N1774A | 200 | 200 |
| 2N1776A | 300 | 300 |
| 2N1777A | 400 | 400 |
| 2N1778A | 500 | 500 |
| 2N2619A | 600 | 600 |

(1) Values apply for zero or negative gate voltage $V_{GK}$.

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3 and 4 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements documents cited in sections 3 and 4 of this specification, whether or not they are listed.

2.2 Government documents.

2.2.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DoDISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATION

DEPARTMENT OF DEFENSE

MIL-PRF-19500 - Semiconductor Devices, General Specification for.

STANDARD

DEPARTMENT OF DEFENSE


MIL-STD-750 - Test Methods for Semiconductor Devices.

(Unless otherwise indicated, copies of the above specifications, standards, and handbooks are available from the Document Automation and Production Services (DAPS), Building 4D (DPM-DODSSP), 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:29Z
Check the source to verify that this is the current version before use.

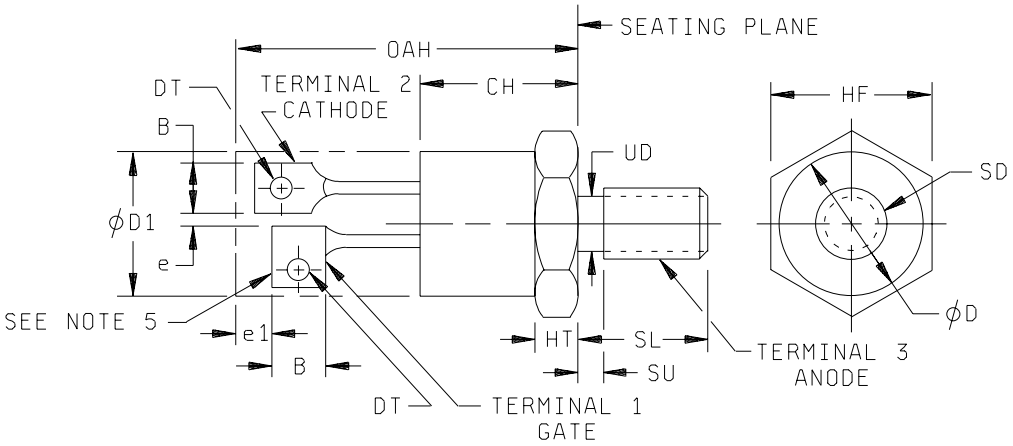


| Ltr | Dimensions | | | | Notes |
|---|---|---|---|---|---|
| | Inches | | Millimeters | | |
| | Min | Max | Min | Max | |
| B | .080 | .136 | 2.03 | 3.45 | 3 |
| CH | .300 | .400 | 7.62 | 10.16 | |
| DT | .040 | .075 | 1.02 | 1.91 | |
| e | .013 | | 0.33 | | 8 |
| $e_1$ | .060 | | 1.52 | | 6 |
| HF | .424 | .437 | 10.77 | 11.10 | |
| HT | .060 | .175 | 1.52 | 4.45 | 4 |
| OAH | .700 | .855 | 17.78 | 21.72 | 2 |
| ΦD | .400 | | 10.16 | | 9 |
| $ΦD_1$ | | .424 | | 10.77 | 2 |
| SD | .1658 | .1697 | 4.212 | 4.310 | 7 |
| SL | .400 | .453 | 10.16 | 11.51 | |
| SU | | .078 | | 1.98 | |
| UD | .163 | .189 | 4.14 | 4.80 | |

NOTES:

1. Dimensions are in inches. Metric equivalents are given for general information only.
2. Device contour except on hex head and noted terminal dimensions is optional within zone defined by $ΦD_1$ and OAH, $ΦD_1$ not to exceed actual HF.
3. Contour and angular orientation of terminals 1 and 2 with respect to hex portion and to each other are optional.
4. Chamfer or undercut on one or both ends of the hexagonal portion are optional.
5. Square or radius on end of terminal is optional.
6. Minimum difference in terminal lengths to establish datum line for numbering terminals.
7. Pitch diameter - thread 10-32 NF-2A (coated). See FED-STD-H28, “Screw-Thread Standards for Federal Services”.
8. Minimum spacing between terminals.
9. Minimum diameter of seating plane.
10. In accordance with ASME Y14.5M, diameters are equivalent to ϕx symbology.

FIGURE 1. Physical dimensions (similar to TO-64).



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:29Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 General. The individual requirements shall be as specified in MIL-PRF-19500 and as modified herein.

3.2 Qualification. Devices furnished under this specification shall be products that are manufactured by a manufacturer authorized by the qualifying activity for listing on the applicable qualified manufacturer's list (QML) before contract award (see 4.2 and 6.3).

3.3 Abbreviations, symbols, and definitions. The abbreviations, symbols, and definitions used herein shall be as specified in MIL-PRF-19500.

3.4 Interface and physical dimensions. The interface and physical dimensions shall be as specified in MIL-PRF-19500 and on figure 1 herein.

3.4.1 Lead material and finish. Lead finish shall be solderable in accordance with MIL-PRF-19500, MIL-STD-750, and herein. Where a choice of lead material or finish is desired, it shall be specified in the acquisition document (see 6.2).

3.4.2 Construction. These devices shall be constructed in a manner and using materials which enable the thyristors to meet the applicable requirements of MIL-PRF-19500 and this document.

3.5 Marking. Devices shall be marked as specified in MIL-PRF-19500.

3.6 Electrical performance characteristics. Unless otherwise specified herein, the electrical performance characteristics are as specified in 1.3, 1.4, and table I herein.

3.7 Electrical test requirements. The electrical test requirements shall be the subgroups specified in 4.4.2 and 4.4.3.

3.8 Workmanship. Semiconductor devices shall be processed in such a manner as to be uniform in quality and shall be free from other defects that will affect life, serviceability, or appearance.

4. VERIFICATION

4.1 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. Qualification inspection (see 4.2).

b. Screening (see 4.3).

c. Conformance inspection (see 4.4).

4.2 Qualification inspection. Qualification inspection shall be in accordance with MIL-PRF-19500 and as specified herein.



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:29Z
Check the source to verify that this is the current version before use.

* 4.3 Screening (JANTX and JANTXV levels). Screening shall be in accordance with appendix E, table IV of MIL-PRF-19500, and as specified herein. The following measurements shall be made in accordance with table I herein. Devices that exceed the limits of table I herein shall not be acceptable.

| Screen (see table IV, appendix E, of MIL-PRF-19500) | Measurement |
|---|---|
| | JANTX and JANTXV levels |
| 3a | Condition F, 10 cycles |
| 7 | Condition C or D for gross leaks |
| 10 | Not required |
| 11 | $I_{RRM}$, $I_{DRM}$ $V_{GT}$, $V_{TM}$ |
| 12d | Method 1040 of MIL-STD-750, Condition A, $T_C$ = +145°C minimum ; $V_{RRM}$, $V_{DRM}$ = rated (see 1.4.1). |
| (1) 13 | Subgroup 2 of table I herein, $\Delta I_{RRM1}$ = 100 percent of initial value or +1.0 mA(pk), whichever is greater. $\Delta I_{DRM1}$ = 100 percent of initial value or +1.0 mA(pk), whichever is greater. |

(1) Devices which exceed the table I limits for this test shall be rejected.

4.4 Conformance inspection. Conformance inspection shall be in accordance with MIL-PRF-19500 and as specified herein. If alternate screening is being performed in accordance with MIL-PRF-19500, a sample of screened devices shall be submitted to and pass the requirements of table I, subgroups 1 and 2 inspection only (table VIb, group B, subgroup 1 is not required to be performed again if group B has already been satisfied in accordance with 4.4.2).

4.4.1 Group A inspection. Group A inspection shall be conducted in accordance with appendix E, table V of MIL-PRF-19500, and table I herein.

* 4.4.2 Group B inspection. Group B inspection shall be conducted in accordance with the conditions specified for subgroup testing in table VIb (JANTX and JANTXV) of MIL-PRF-19500, appendix E, and as follows. Electrical measurements (end-points) shall be in accordance with the applicable steps of table II herein.



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:29Z
Check the source to verify that this is the current version before use.

* 4.4.2.1 Group B inspection, appendix E, table VIb (JANTX and JANTXV) of MIL-PRF-19500.

| Subgroup | Method | Condition |
|---|---|---|
| B2 | 1051 | Test condition F, 15 cycles. |
| B2 | 1071 | Condition C or D for gross leaks. |
| B2 | 4066 | $I_{TSM}$ = 60 A(pk) (0.5 sine wave); 10 surges 1 per minute; $I_O$ = 4.7 A at rated. $V_{RRM}$; $T_C$ = +65°C; f = 60 Hz; surge duration = 7 ms, minimum. |
| B3 | 1026 | $T_C$ = +118°C, ± 5°C, 50 min “on”, $I_O$ = 1.25 A, $T_C$ uncontrolled, 10 minutes “off”. |
| B5 | | Not applicable. |

4.4.3 Group C inspection. Group C inspection shall be conducted in accordance with the conditions specified for subgroup testing in appendix E, table VII of MIL-PRF-19500. Electrical measurements (end-points) shall be in accordance with the applicable steps of table II herein.

* 4.4.3.1 Group C inspection, appendix E, table VII of MIL-PRF-19500

| Subgroup | Method | Condition |
|---|---|---|
| C2 | 2036 | Test condition A, weight 10 pounds, application time = 15 seconds. |
| C2 | 1071 | Condition C or D for gross leaks. |
| C3 | | Not applicable. |
| C6 | 1026 | $T_C$ = +118°C, ± 5°C, 50 min “on”, $I_O$ = 1.25 A, $T_C$ uncontrolled, 10 minutes “off”. |

4.5 Methods of inspection. Methods of inspection shall be as specified in the appropriate tables and as follows.

4.5.1 Pulse measurements. Conditions for pulse measurement shall be as specified in section 4 of MIL-STD-750.



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:29Z
Check the source to verify that this is the current version before use.

* TABLE I. Group A inspection.

| Inspection 1/ | MIL-STD-750 | | Symbol | Limits | | Unit |
|---|---|---|---|---|---|---|
| | Method | Conditions | | Min | Max | |
| Subgroup 1 | | | | | | |
| Visual and mechanical examination | 2071 | | | | | |
| Subgroup 2 | | | | | | |
| Reverse blocking current | 4211 | AC method, bias condition D; f = 60 Hz; $V_{RRM}$ = rated (see 1.4.1) | $I_{RRM1}$ | | 1 | mA(pk) |
| Forward blocking current | 4206 | AC method, bias condition D; f = 60 Hz, $V_{DRM}$ = rated (see 1.4.1) | $I_{DRM1}$ | | 1 | mA(pk) |
| Gate trigger voltage and current | 4221 | $V_2 = V_D$ = 6 V dc; $T_C$ = + 25°C<br>$R_e$ = 20 Ω maximum | $V_{GT1}$<br>$I_{GT1}$ | | 2<br>15 | V dc<br>mA dc |
| 2N1771A, 2N1772A, 2N1774A, 2N1776A, | | $R_L$ = 50 Ω | | | | |
| * 2N1777A, 2N1778A | | $R_L$ = 50 Ω | | | | |
| * 2N2619A | | $R_L$ = 50 Ω | | | | |
| Forward “on” voltage | 4226 | $I_{TM}$ = 14.8 A(pk) (pulse); pulse width = 8.5 ms; maximum; duty cycle = 2 percent maximum | $V_{TM}$ | | 1.85 | V(pk) |
| Holding current | 4201 | Bias condition D; $R_2$ = 50 Ω<br>$V_{AA}$ = 24 V dc maximum;<br>$I_{F1}$ = 1 A dc; $I_{F2}$ = 100 mA dc;<br>trigger voltage source = 6 V dc;<br>trigger PW = 25 µs (minimum) | $I_H$ | | 25 | mA dc |
| Reverse gate current | 4219 | $V_G$ = 10 V dc | $I_G$ | | 250 | mA dc |
| Subgroup 3 | | | | | | |
| High temperature operation: | | $T_C$ = +145°C | | | | |
| Reverse blocking current | 4211 | AC method, bias condition D; f = 60 Hz; $V_{RRM}$ = rated (see 1.4.1) | $I_{RRM2}$ | | 2 | mA(pk) |
| Forward blocking current | 4206 | AC method, bias condition D; f = 60 Hz; $V_{DRM}$ = rated (see 1.4.1) | $I_{DRM2}$ | | 2 | mA(pk) |
| Gate trigger voltage and current | 4221 | $V_2$ = rated $V_{DM}$ ; $T_C$ = + 125°C<br>$R_e$ = 20 Ω maximum | $V_{GT2}$ | 0.2 | | V dc |
| 2N1771A, 2N1772A<br>2N1774A, 2N1776A | | $R_L$ = 140 Ω<br>$R_L$ = 650 Ω | | | | |
| * 2N1777A, 2N1778A<br>* 2N2619A | | | | | | |

See footnote at end of table.



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:29Z
Check the source to verify that this is the current version before use.

* TABLE I. Group A inspection - Continued.

| Inspection 1/ | MIL-STD-750 | | Symbol | Limits | | Unit |
|---|---|---|---|---|---|---|
| | Method | Conditions | | Min | Max | |
| Subgroup 3 - Continued | | | | | | |
| Low temperature operation: | | $T_C$ = -65°C | | | | |
| Reverse blocking current | 4211 | AC method, bias condition D; f = 60 Hz, $V_{RRM}$ = rated (see 1.4.1) | $I_{RRM3}$ | | 1 | mA(pk) |
| Forward blocking current | 4206 | AC method, bias condition D; f = 60 Hz; $V_{DRM}$ = rated (see 1.4.1) | $I_{DRM3}$ | | 1 | mA(pk) |
| Gate trigger voltage and current | 4221 | $V_2 = V_D$ = 6 V dc; $R_e$ = 20 Ω maximum | $V_{GT1}$<br>$I_{GT2}$ | | 2<br>30 | V dc<br>mA dc |
| 2N1771A, 2N1772A | | $R_L$ = 140 Ω | | | | |
| 2N1774A, 2N1776A, | | $R_L$ = 650 Ω | | | | |
| * 2N1777A, 2N1778A | | $R_L$ = 650 Ω | | | | |
| * 2N2619A | | $R_L$ = 650 Ω | | | | |
| Subgroups 4 and 5 | | | | | | |
| Not applicable | | | | | | |
| Subgroup 6 | | | | | | |
| Exponential rate of voltage rise | 4231 | Bias condition D; $T_C$ = +150°C repetition rate = 60 pps test duration = 15 s; C = 10 µF; 50 ≤ $R_L$ ≤ 400 Ω | $dv / dt$ | | 5 | V/µs |
| 2N1771A | | $V_A$ = 50 V dc | $V_D$ | 47 | | V dc |
| 2N1772A | | $V_A$ = 100 V dc | | 95 | | V dc |
| 2N1774A | | $V_A$ = 200 V dc | | 190 | | V dc |
| 2N1776A | | $V_A$ = 300 V dc | | 285 | | V dc |
| 2N1777A | | $V_A$ = 400 V dc | | 380 | | V dc |
| * 2N1778A | | $V_A$ = 500 V dc | | 475 | | V dc |
| * 2N2619A | | $V_A$ = 600 V dc | | 570 | | V dc |

See footnote at end of table.



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:29Z
Check the source to verify that this is the current version before use.

* TABLE I. Group A inspection - Continued.

| Inspection 1/ | MIL-STD-750 | | Symbol | Limits | | Unit |
|---|---|---|---|---|---|---|
| | Method | Conditions | | Min | Max | |
| Subgroup 7 | | | | | | |
| Circuit commutated turn-off time | 4224 | $T_C$ = +145°C; $I_{TM}$ = 5 A pk; $t_{on}$ = 100 µs; $d_i/d_t$ = 5 A/µs minimum; reverse voltage at $t_1$ = 2 V minimum; repetition rate = 1 Hz; $d_v/d_t$ = 5 V/µs; gate bias conditions: gate source voltage = 0 V; gate source resistance = 100 Ω | $t_{off}$ | | | |
| 2N1771A | | $V_{DM} = V_{DRM}$ = 50 V(pk); $V_{RRM}$ = 50 V maximum | | | 30 | µs |
| 2N1772A | | $V_{DM} = V_{DRM}$ = 100 V(pk); $V_{RRM}$ = 100 V maximum | | | 30 | µs |
| 2N1774A | | $V_{DM} = V_{DRM}$ = 200 V(pk); $V_{RRM}$ = 200 V maximum | | | 30 | µs |
| 2N1776A | | $V_{DM} = V_{DRM}$ = 300 V(pk); $V_{RRM}$ = 300 V maximum | | | 30 | µs |
| 2N1777A | | $V_{DM} = V_{DRM}$ = 400 V(pk); $V_{RRM}$ = 400 V maximum | | | 30 | µs |
| * 2N1778A | | $V_{DM} = V_{DRM}$ = 500 V(pk); $V_{RRM}$ = 500 V maximum | | | 30 | µs |
| * 2N2619A | | $V_{DM} = V_{DRM}$ = 600 V(pk); $V_{RRM}$ = 600 V maximum | | | 30 | µs |
| Gate controlled turn-on time | 4223 | $I_{TM}$ = 5 A dc; $V_{GG}$ = 10 V dc; $R_e$ = 50 Ω; $t_{P1}$ = 15 ±5 µs; 2 A/µs ≤ $d_i/d_t$ ≤ 200 A/µs | $t_{on}$ | | 5 | µs |
| 2N1771A | | $V_A = V_{DRM}$ = 50 V(pk) | | | | |
| 2N1772A | | $V_A = V_{DRM}$ = 100 V(pk) | | | | |
| 2N1774A | | $V_A = V_{DRM}$ = 200 V(pk) | | | | |
| 2N1776A | | $V_A = V_{DRM}$ = 300 V(pk) | | | | |
| 2N1777A | | $V_A = V_{DRM}$ = 400 V(pk) | | | | |
| * 2N1778A | | $V_A = V_{DRM}$ = 500 V(pk) | | | | |
| * 2N2619A | | $V_A = V_{DRM}$ = 600 V(pk) | | | | |

1/ For sampling plan, see MIL-PRF-19500.



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:29Z
Check the source to verify that this is the current version before use.

TABLE II. Groups A, B, and C electrical end-point inspection measurements. 1/ 2/

| Step | Inspection | MIL-STD-750 | | Symbol | Limits | | Unit |
|---|---|---|---|---|---|---|---|
| | | Method | Conditions | | Min | Max | |
| 1. | Reverse blocking cutoff current | 4211 | AC method, bias condition D; f = 60 Hz; $V_{RRM}$ = rated (see 1.4.1) | $I_{RRM1}$ | | 1 | mA(pk) |
| 2. | Forward blocking current | 4206 | AC method, bias condition D; f = 60 Hz; $V_{DRM}$ = rated (see 1.4.1) | $I_{DRM1}$ | | 1 | mA(pk) |
| 3. | Reverse blocking cutoff current | 4211 | AC method, bias condition D; $T_C$ = +125°C; f = 60 Hz; $V_{RRM}$ = rated (see 1.4.1) | $I_{RRM2}$ | | 2 | mA(pk) |
| 4. | Forward blocking current | 4206 | AC method; bias condition D; $T_C$ = +125°C; f = 60 Hz; $V_{DRM}$ = rated (see 1.4.1) | $I_{DRM2}$ | | 2 | mA(pk) |
| 5. | Gate trigger voltage and current | 4221 | $V_2 = V_D$ = 6 V dc; $R_L$ = 50 Ω; $R_e$ = 20Ω maximum | $V_{GT1}$ | | 2 | V dc |
| | | | | $I_{GT1}$ | | 15 | mA dc |
| 6. | Forward “on” voltage transfer ratio | 4226 | $I_{TM}$ = 14.8 A(pk) (pulse); pulse width = 8.5 ms maximum; duty cycle = 2 percent maximum | $V_{TM}$ | | 1.85 | V(pk) |

1/ The electrical measurements for appendix E, table VIb (JAN, JANTX and JANTXV) of MIL-PRF-19500 are as follows: Subgroups 2, 3, and 6, see table II herein, steps 1, 2, 3, 4, 5, and 6.
2/ The electrical measurements for appendix E, table VII of MIL-PRF-19500 are as follows: Subgroups 2, 3, and 6, see table II herein, steps 1, 2, 3, 4, 5, and 6.



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:29Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When actual packaging of materiel is to be performed by DoD personnel, these personnel need to contact the responsible packaging activity to ascertain requisite packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activity within the Military Department or Defense Agency, or within the Military Department's System Command. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The notes specified in MIL-PRF-19500 are applicable to this specification.

6.2 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number, and date of this specification.

b. Issue of DoDISS to be cited in the solicitation and if required, the specific issue of individual documents referenced (see 2.2.1).

c. The lead finish or material as specified (see 3.4.1).

d. Type designation and quality assurance level.

e. Packaging requirements (see 5.1).

6.3 Qualification. With respect to products requiring qualification, awards will be made only for products which are, at the time of award of contract, qualified for inclusion in Qualified Manufacturer's List (QML-19500) whether or not such products have actually been so listed by that date. The attention of the contractors is called to these requirements, and manufacturers are urged to arrange to have the products that they propose to offer to the Federal Government tested for qualification in order that they may be eligible to be awarded contracts or orders for the products covered by this specification. Information pertaining to qualification of products may be obtained from Defense Supply Center Columbus, ATTN: DSCC-VQE, P.O. Box 3990, Columbus, OH 43216-5000.

6.4 Changes from previous issue. The margins of this specification are marked with asterisks to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:
Army - CR
Navy - EC
Air Force - 11
DLA - CC

Preparing activity:
DLA - CC

(Project 5961-2751)

Review activities:
Army – AV, MI
Air Force – 19, 99



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:29Z
Check the source to verify that this is the current version before use.

**STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL**

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.

2. The submitter of this form must complete blocks 4, 5, 6, and 7.

3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

| **I RECOMMEND A CHANGE:** | 1. DOCUMENT NUMBER<br>MIL-PRF-19500/168F | 2. DOCUMENT DATE<br>1 August 2003 |
|---|---|---|

*3. **DOCUMENT TITLE** SEMICONDUCTOR DEVICE, THYRISTORS (CONTROLLED RECTIFIERS), SILICON, TYPES 2N1771A, 2N1772A, 2N1774A, 2N1776A, 2N1777A, 2N1778A, 2N2619A, JAN, JANTX, AND JANTXV

4. NATURE OF CHANGE (Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)

5. REASON FOR RECOMMENDATION

6. SUBMITTER

| a. NAME (Last, First, Middle initial) | b. ORGANIZATION | |
|---|---|---|
| c. ADDRESS (Include Zip Code) | d. TELEPHONE (Include Area Code)<br>COMMERCIAL<br>DSN<br>FAX<br>EMAIL | 7. DATE SUBMITTED |

8. PREPARING ACTIVITY

| a. Point of Contact<br>Alan Barone | b. TELEPHONE<br>Commercial DSN FAX EMAIL<br>614-692-0510 850-0510 614-692-6939 alan.barone@dla.mil |
|---|---|
| c. ADDRESS<br>Defense Supply Center, Columbus<br>ATTN: DSCC-VAC, P.O. Box 3990<br>Columbus, OH 43216-5000 | IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT:<br>Defense Standardization Program Office (DLSC-LM)<br>8725 John J. Kingman, Suite 2533, Fort Belvoir, VA 22060-6221<br>Telephone (703) 767-6888 DSN 427-6888 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:29Z
Check the source to verify that this is the current version before use.