INCH-POUND
MIL-PRF-19500/168H
4 December 2006
SUPERSEDING
MIL-PRF-19500/168G
14 March 2006

PERFORMANCE SPECIFICATION SHEET

# SEMICONDUCTOR DEVICE, THYRISTORS (CONTROLLED RECTIFIERS), SILICON, TYPES 2N1771A, 2N1772A, 2N1774A, 2N1776A, 2N1777A, 2N1778A, AND 2N2619A, JAN, JANTX, AND JANTXV

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-PRF-19500.

## 1. SCOPE

1.1 Scope. This specification covers the performance requirements for PNPN, silicon power, reverse-blocking triode thyristors. Three levels of product assurance are provided for each device type as specified in MIL-PRF-19500.

1.2 Physical dimensions. See figure 1 (similar to TO-64).

1.3 Maximum ratings. Unless otherwise specified $T_A$ = +25°C.

| Limits | $I_O$ (1) $T_C$ = +105°C (180 degree condition angle) | $I_{TSM}$ (2) | $V_{GM}$ | $T_J$ | $T_{STG}$ | $dv/dt$ (3) (repetitive) |
|---|---|---|---|---|---|---|
| | A | A | V(pk) | °C | °C | v/µs |
| Min | | | | -65 | -65 | 5 |
| Max | 4.7 | 60 | 10 | +150 | +150 | |

(1) This average forward current is for a maximum case temperature of +105°C, and 180 electrical degrees of conduction.
(2) Surge rating is non-recurrent and applies only with device in the "on" conducting state. The peak rate of surge current must not exceed 40 amperes/microsecond during the first 10 µs after switching from the "off" (blocking) state to the "on" (conducting) state. This time is measured from the point where the thyristor voltage has decayed to 90 percent of its initial blocking value.
(3) $T_C$ = -65°C to +150°C.

1.4 Primary electrical characteristics.

| Limits | $V_{TM}$ | $I_H$ | $V_{GT}$ (1) | $I_{GT}$ (1) | $t_{off}$ (1) | $t_{on}$ |
|---|---|---|---|---|---|---|
| | V | mA dc | V dc | mA dc | µs | µs |
| Min | | | 0.2 | | | |
| Max | 1.85 | 25 | 2.0 | 30 | 30 | 5 |

(1) $T_C$ = -65° to +150°C.

Comments, suggestions, or questions on this document should be addressed to Defense Supply Center, Columbus, ATTN: DSCC-VAC, P.O. Box 3990, Columbus, OH 43218-3990, or emailed to Semiconductor@dscc.dla.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at http://assist.daps.dla.mil/ .



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:29Z
Check the source to verify that this is the current version before use.

1.4.1 Individual ratings.

| Types | $V_{RRM}$ | $V_{DRM}$ |
|---|---|---|
| | V(pk) (1) | V(pk) |
| 2N1771A | 50 | 50 |
| 2N1772A | 100 | 100 |
| 2N1774A | 200 | 200 |
| 2N1776A | 300 | 300 |
| 2N1777A | 400 | 400 |
| 2N1778A | 500 | 500 |
| 2N2619A | 600 | 600 |

(1) Values apply for zero or negative gate voltage $V_{GK}$.

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3, 4, or 5 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements of documents cited in sections 3, 4, or 5 of this specification, whether or not they are listed.

2.2 Government documents.

2.2.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

DEPARTMENT OF DEFENSE SPECIFICATIONS

MIL-PRF-19500 - Semiconductor Devices, General Specification for.

DEPARTMENT OF DEFENSE STANDARDS

MIL-STD-750 - Test Methods for Semiconductor Devices.

(Copies of these documents are available online at http://assist.daps.dla.mil/quicksearch/ or http://assist.daps.dla.mil or from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111-5094.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.


3. REQUIREMENTS

3.1 General. The individual item requirements shall be as specified in MIL-PRF-19500 and as modified herein.

3.2 Qualification. Devices furnished under this specification shall be products that are manufactured by a manufacturer authorized by the qualifying activity for listing on the applicable qualified manufacturers list before contract award (see 4.2 and 6.3).



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:29Z
Check the source to verify that this is the current version before use.

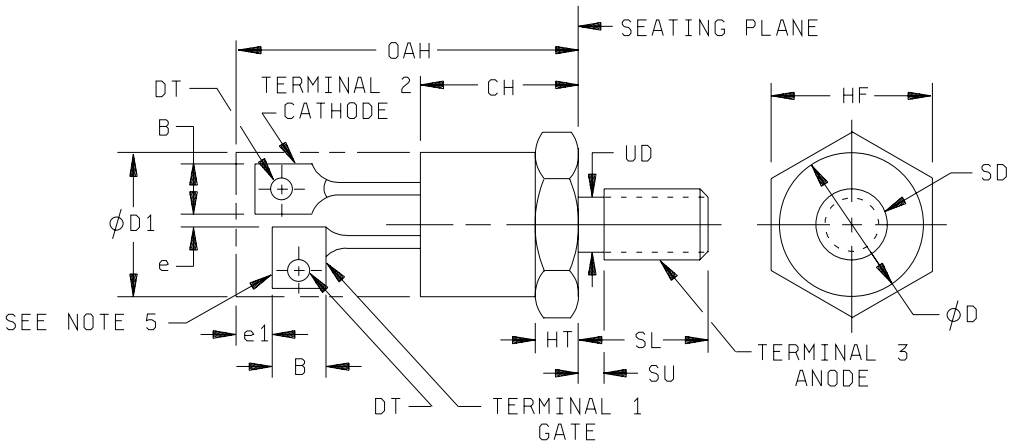


| Ltr | Dimensions | | | | Notes |
|---|---|---|---|---|---|
| | Inches | | Millimeters | | |
| | Min | Max | Min | Max | |
| B | .080 | .136 | 2.03 | 3.45 | 3 |
| CH | .300 | .400 | 7.62 | 10.2 | |
| DT | .040 | .075 | 1.02 | 1.9 | |
| e | .013 | | 0.33 | | 8 |
| e1 | .060 | | 1.52 | | 6 |
| HF | .424 | .437 | 10.8 | 11.1 | |
| HT | .060 | .175 | 1.52 | 4.45 | 4 |
| OAH | .700 | .855 | 17.8 | 21.72 | 2 |
| ΦD | .400 | | 10.2 | | 9 |
| ΦD1 | | .424 | | 10.8 | 2 |
| SD | .1658 | .1697 | 4.21 | 4.310 | 7 |
| SL | .400 | .453 | 10.2 | 11.51 | |
| SU | | .078 | | 1.98 | |
| UD | .163 | .189 | 4.14 | 4.80 | |

NOTES:

1. Dimensions are in inches. Millimeters are given for general information only.
2. Device contour, except on hex head and noted terminal dimensions, is optional within zone defined by $\Phi D_1$ and OAH, $\Phi D_1$ not to exceed actual HF.
3. Contour and angular orientation of terminals 1 and 2, with respect to hex portion and to each other, are optional.
4. Chamfer, or undercut, on one or both ends of the hexagonal portion are optional.
5. Square or radius on end of terminal is optional.
6. Minimum difference in terminal lengths to establish datum line for numbering terminals.
7. Pitch diameter - thread 10-32 NF-2A (coated). See FED-STD-H28, “Screw-Thread Standards for Federal Services”.
8. Minimum spacing between terminals.
9. Minimum diameter of seating plane.
10. In accordance with ASME Y14.5M, diameters are equivalent to Φx symbology.

FIGURE 1. Physical dimensions (similar to TO-64).



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:29Z
Check the source to verify that this is the current version before use.

3.3 Abbreviations, symbols, and definitions. The abbreviations, symbols, and definitions used herein shall be as specified in MIL-PRF-19500 and as follows:

$V_{AA}$ - Anode power supply voltage (dc).

3.4 Interface and physical dimensions. The interface and physical dimensions shall be as specified in MIL-PRF-19500 and on figure 1 herein.

3.4.1 Lead finish. Lead finish shall be solderable in accordance with MIL-PRF-19500, MIL-STD-750, and herein. Where a choice of lead finish is desired, it shall be specified in the acquisition document (see 6.2).

3.4.2 Lead material. Where a choice of lead material is desired, it shall be specified in the acquisition document (see 6.2).

3.4.3 Construction. These devices shall be constructed in a manner and using materials which enable the thyristors to meet the applicable requirements of MIL-PRF-19500 and this document.

3.5 Marking. Marking shall be in accordance with MIL-PRF-19500.

3.6 Electrical performance characteristics. Unless otherwise specified herein, the electrical performance characteristics are as specified in 1.3, 1.4, and table I.

3.7 Electrical test requirements. The electrical test requirements shall be as specified in table I herein.

3.8 Workmanship. Semiconductor devices shall be processed in such a manner as to be uniform in quality and shall be free from other defects that will affect life, serviceability, or appearance.

4. VERIFICATION

4.1 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. Qualification inspection (see 4.2).

b. Screening (see 4.3).

c. Conformance inspection (see 4.4 and tables I, II, and III).

4.2 Qualification inspection. Qualification inspection shall be in accordance with MIL-PRF-19500 and as specified herein.

4.2.1 Group E qualification. Group E inspection shall be performed for qualification or re-qualification only. In case qualification was awarded to a prior revision of the specification sheet that did not require the performance of table III tests, the tests specified in table III herein that were not performed in the prior revision shall be performed on the first inspection lot of this revision to maintain qualification.



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:29Z
Check the source to verify that this is the current version before use.

* 4.3 Screening (JANTX AND JANTXV level). Screening shall be in accordance with table E-IV of MIL-PRF-19500, and as specified herein. The following measurements shall be made in accordance with table I herein. Devices that exceed the limits of table I herein shall not be acceptable.

| Screen (see table E-IV of MIL-PRF-19500) | Measurement |
|---|---|
| | JANTX and JANTXV levels |
| 3a | Condition F, 10 cycles. |
| 10 | Not required. |
| 11 | $I_{RRM1}$, $I_{DRM1}$, $V_{GT1}$, $V_{TM}$. |
| 12 | Method 1040 of MIL-STD-750, condition A, $T_C$ = +145°C minimum, $R_{GK} \geq 1K\Omega$; $V_{RRM}$, $V_{DRM}$ = rated (see 1.4.1). |
| 13 | Subgroup 2 of table I herein, $\Delta I_{RRM1}$ = 100 percent of initial value or +1.0 mA (pk), whichever is greater.<br>$\Delta I_{DRM1}$ = 100 percent of initial value or +1.0 mA (pk), whichever is greater. |
| 14b | Method 1071 of MIL-STD-750, condition C or D for gross leak |

4.4 Conformance inspection. Conformance inspection shall be in accordance with MIL-PRF-19500 and as specified herein. If alternate screening is being performed in accordance with MIL-PRF-19500, a sample of screened devices shall be submitted to and pass the requirements of table I, subgroups 1 and 2 inspection only (table E-VIb, group B, subgroup 1 of MIL-PRF-19500 is not required to be performed again if group B has already been satisfied in accordance with 4.4.2).

4.4.1 Group A inspection. Group A inspection shall be conducted in accordance with table E-V of MIL-PRF-19500, and table I herein.

4.4.2 Group B inspection. Group B inspection shall be conducted in accordance with the conditions specified for subgroup testing in table E-VIb (JANTX and JANTXV) of MIL-PRF-19500 and as follows. Electrical measurements (end-points) shall be in accordance with the applicable steps of table II herein.

4.4.2.1 Group B inspection, table E-VIb (JANTX and JANTXV) of MIL-PRF-19500.

| Subgroup | Method | Condition |
|---|---|---|
| B2 | 1051 | Test condition F, 15 cycles. |
| B2 | 1071 | Condition C or D for gross leaks. |
| B2 | 4066 | $I_{TSM}$ = 60 A(pk) (0.5 sine wave); 10 surges 1 per minute; $I_O$ = 4.7 A at rated $V_{RRM}$; $T_C$ = +65°C; f = 60 Hz; surge duration = 7 ms, minimum. |
| B3 | 1026 | $T_C$ = +118°C, ± 5°C, 50 min “on”, $I_O$ = 1.25 A, $T_C$ uncontrolled, 10 minutes “off”. |
| B5 | | Not applicable. |



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:29Z
Check the source to verify that this is the current version before use.

4.4.3 Group C inspection. Group C inspection shall be conducted in accordance with the conditions specified for subgroup testing in table E-VII of MIL-PRF-19500. Electrical measurements (end-points) shall be in accordance with the applicable steps of table II herein.

4.4.3.1 Group C inspection, table E-VII of MIL-PRF-19500

| Subgroup | Method | Condition |
|---|---|---|
| C2 | 2036 | Test condition A, weight 10 pounds, application time = 15 seconds. |
| C2 | 1071 | Condition C or D for gross leaks. |
| C3 | | Not applicable. |
| C6 | 1026 | $T_C$ = +118°C, ±5°C, 50 min “on”, $I_O$ = 1.25 A, $T_C$ uncontrolled, 10 minutes “off”. |

* 4.4.4 Group E inspection. Group E inspection shall be conducted in accordance with the tests and conditions specified for subgroup testing in table E-IX of MIL-PRF-19500, and table III herein. Electrical measurements (end-points) shall be in accordance with table I, subgroup 2 herein.

4.5 Methods of inspection. Methods of inspection shall be as specified in the appropriate tables and as follows.

4.5.1 Pulse measurements. Conditions for pulse measurement shall be as specified in section 4 of MIL-STD-750.



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:29Z
Check the source to verify that this is the current version before use.

TABLE I. Group A inspection.

| Inspection 1/ | MIL-STD-750 | | Symbol | Limits | | Unit |
|---|---|---|---|---|---|---|
| | Method | Conditions | | Min | Max | |
| Subgroup 1 | | | | | | |
| Visual and mechanical examination | 2071 | | | | | |
| Subgroup 2 | | | | | | |
| Reverse blocking current | 4211 | AC method, bias condition D; f = 60 Hz; $V_{RRM}$ = rated (see 1.4.1) | $I_{RRM1}$ | | 1 | mA (pk) |
| Forward blocking current | 4206 | AC method, bias condition D; f = 60 Hz, $V_{DRM}$ = rated (see 1.4.1) | $I_{DRM1}$ | | 1 | mA (pk) |
| Gate trigger voltage and current | 4221 | $V_2 = V_D$ = 6 V dc; $T_C$ = + 25°C<br>$R_e$ = 20 Ω maximum | $V_{GT1}$<br>$I_{GT1}$ | | 2<br>15 | V dc<br>mA dc |
| 2N1771A, 2N1772A<br>2N1774A, 2N1776A<br>2N1777A, 2N1778A<br>2N2619A | | $R_L$ = 50 Ω<br>$R_L$ = 50 Ω<br>$R_L$ = 50 Ω<br>$R_L$ = 50 Ω | | | | |
| Forward “on” voltage | 4226 | $I_{TM}$ = 14.8 A (pk) (pulse); pulse width = 8.5 ms; maximum; duty cycle = 2 percent maximum | $V_{TM}$ | | 1.85 | V (pk) |
| Holding current | 4201 | Bias condition D; $R_2$ = 50 Ω<br>$V_{AA}$ = 24 V dc maximum;<br>$I_{F1}$ = 1 A dc; $I_{F2}$ = 100 mA dc;<br>trigger voltage source = 6 V dc;<br>trigger PW = 25 μs (minimum) | $I_H$ | | 25 | mA dc |
| Reverse gate current | 4219 | $V_G$ = 10 V dc | $I_G$ | | 250 | mA dc |
| Subgroup 3 | | | | | | |
| High temperature operation: | | $T_C$ = +145°C minimum | | | | |
| Reverse blocking current | 4211 | AC method, bias condition D; f = 60 Hz; $V_{RRM}$ = rated (see 1.4.1) | $I_{RRM2}$ | | 2 | mA (pk) |
| Forward blocking current | 4206 | AC method, bias condition D; f = 60 Hz; $V_{DRM}$ = rated (see 1.4.1) | $I_{DRM2}$ | | 2 | mA (pk) |
| Gate trigger voltage and current | 4221 | $V_2$ = rated $V_{DM}$ ; $T_C$ = + 125°C minimum; $R_e$ = 20 Ω maximum | $V_{GT2}$ | 0.2 | | V dc |
| 2N1771A, 2N1772A | | $R_L$ = 140 Ω | | | | |
| 2N1774A, 2N1776A<br>2N1777A, 2N1778A<br>2N2619A | | $R_L$ = 650 Ω | | | | |

See footnote at end of table.



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:29Z
Check the source to verify that this is the current version before use.

TABLE I. Group A inspection - Continued.

| Inspection 1/ | MIL-STD-750 | | Symbol | Limits | | Unit |
|---|---|---|---|---|---|---|
| | Method | Conditions | | Min | Max | |
| Subgroup 3 - Continued | | | | | | |
| Low temperature operation: | | $T_C$ = -65°C maximum | | | | |
| Reverse blocking current | 4211 | AC method, bias condition D; f = 60 Hz, $V_{RRM}$ = rated (see 1.4.1) | $I_{RRM3}$ | | 1 | mA (pk) |
| Forward blocking current | 4206 | AC method, bias condition D; f = 60 Hz; $V_{DRM}$ = rated (see 1.4.1) | $I_{DRM3}$ | | 1 | mA (pk) |
| Gate trigger voltage and current | 4221 | $V_2 = V_D$ = 6 V dc; $R_e$ = 20 Ω maximum | $V_{GT1}$<br>$I_{GT2}$ | | 2<br>30 | V dc<br>mA dc |
| 2N1771A, 2N1772A | | $R_L$ = 140 Ω | | | | |
| 2N1774A, 2N1776A | | $R_L$ = 650 Ω | | | | |
| 2N1777A, 2N1778A | | $R_L$ = 650 Ω | | | | |
| 2N2619A | | $R_L$ = 650 Ω | | | | |
| Subgroups 4, 5, and 6 | | | | | | |
| Not applicable | | | | | | |
| Subgroup 7 | | | | | | |
| Exponential rate of voltage rise | 4231 | Bias condition D; $T_C$ = +145°C minimum repetition rate = 60 pps test duration = 15 s; C = 10 μF; 50 Ω ≤ $R_L$ ≤ 400 Ω | $dv/dt$ | | 5 | V/μs |
| 2N1771A | | $V_A$ = 50 V dc | $V_D$ | 47 | | V dc |
| 2N1772A | | $V_A$ = 100 V dc | | 95 | | V dc |
| 2N1774A | | $V_A$ = 200 V dc | | 190 | | V dc |
| 2N1776A | | $V_A$ = 300 V dc | | 285 | | V dc |
| 2N1777A | | $V_A$ = 400 V dc | | 380 | | V dc |
| 2N1778A | | $V_A$ = 500 V dc | | 475 | | V dc |
| 2N2619A | | $V_A$ = 600 V dc | | 570 | | V dc |

See footnote at end of table.



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:29Z
Check the source to verify that this is the current version before use.

TABLE I. Group A inspection - Continued.

| Inspection 1/ | MIL-STD-750 | | Symbol | Limits | | Unit |
|---|---|---|---|---|---|---|
| | Method | Conditions | | Min | Max | |
| Subgroup 7 - Continued | | | | | | |
| Circuit commutated turn-off time | 4224 | $T_C$ = +145°C minuimum; $I_{TM}$ = 5 A pk; $t_{on}$ = 100 µs; $d_i/d_t$ = 5 A/µs minimum; reverse voltage at $t_1$ = 2 V minimum; repetition rate = 1 Hz; $d_v/d_t$ = 5 V/µs; gate bias conditions: gate source voltage = 0 V, gate source resistance = 100 Ω | $t_{off}$ | | | |
| 2N1771A | | $V_{DM} = V_{DRM}$ = 50 V(pk); $V_{RRM}$ = 50 V maximum | | | 30 | µs |
| 2N1772A | | $V_{DM} = V_{DRM}$ = 100 V(pk); $V_{DRM}$ = 100 V maximum | | | 30 | µs |
| 2N1774A | | $V_{DM} = V_{DRM}$ = 200 V(pk); $V_{DRM}$ = 200 V maximum | | | 30 | µs |
| 2N1776A | | $V_{DM} = V_{DRM}$ = 300 V(pk); $V_{DRM}$ = 300 V maximum | | | 30 | µs |
| 2N1777A | | $V_{DM} = V_{DRM}$ = 400 V(pk); $V_{DRM}$ = 400 V maximum | | | 30 | µs |
| 2N1778A | | $V_{DM} = V_{DRM}$ = 500 V(pk); $V_{DRM}$ = 500 V maximum | | | 30 | µs |
| 2N2619A | | $V_{DM} = V_{DRM}$ = 600 V(pk); $V_{DRM}$ = 600 V maximum | | | 30 | µs |
| Gate controlled turn-on time | 4223 | $I_{TM}$ = 5 A dc; $V_{GG}$ = 10 V dc; $R_e$ = 50 Ω; $t_{P1}$ = 15 ±5 µs; 2 A/µs ≤ $d_i/d_t$ ≤ 200 A/µs | $t_{on}$ | | 5 | µs |
| 2N1771A | | $V_A = V_{DRM}$ = 50 V(pk) | | | | |
| 2N1772A | | $V_A = V_{DRM}$ = 100 V(pk) | | | | |
| 2N1774A | | $V_A = V_{DRM}$ = 200 V(pk) | | | | |
| 2N1776A | | $V_A = V_{DRM}$ = 300 V(pk) | | | | |
| 2N1777A | | $V_A = V_{DRM}$ = 400 V(pk) | | | | |
| 2N1778A | | $V_A = V_{DRM}$ = 500 V(pk) | | | | |
| 2N2619A | | $V_A = V_{DRM}$ = 600 V(pk) | | | | |

1/ For sampling plan, see MIL-PRF-19500.



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:29Z
Check the source to verify that this is the current version before use.

TABLE II. Groups A, B, and C electrical end-point inspection measurements. 1/ 2/

| Step | Inspection | MIL-STD-750 | | Symbol | Limits | | Unit |
|---|---|---|---|---|---|---|---|
| | | Method | Conditions | | Min | Max | |
| 1. | Reverse blocking cutoff current | 4211 | AC method, bias condition D; f = 60 Hz; $V_{RRM}$ = rated (see 1.4.1) | $I_{RRM1}$ | | 1 | mA (pk) |
| 2. | Forward blocking current | 4206 | AC method, bias condition D; f = 60 Hz; $V_{DRM}$ = rated (see 1.4.1) | $I_{DRM1}$ | | 1 | mA (pk) |
| 3. | Reverse blocking cutoff current | 4211 | AC method, bias condition D; $T_C$ = +125°C minimum; f = 60 Hz; $V_{RRM}$ = rated (see 1.4.1) | $I_{RRM2}$ | | 2 | mA (pk) |
| 4. | Forward blocking current | 4206 | AC method; bias condition D; $T_C$ = +125°C minimum; f = 60 Hz; $V_{DRM}$ = rated (see 1.4.1) | $I_{DRM2}$ | | 2 | mA (pk) |
| 5. | Gate trigger voltage and current | 4221 | $V_2 = V_D$ = 6 V dc; $R_L$ = 50 Ω; $R_e$ = 20Ω maximum | $V_{GT1}$ | | 2 | V dc |
| | | | | $I_{GT1}$ | | 15 | mA dc |
| 6. | Forward “on” voltage transfer ratio | 4226 | $I_{TM}$ = 14.8 A(pk) (pulse); pulse width = 8.5 ms maximum; duty cycle = 2 percent maximum | $V_{TM}$ | | 1.85 | V (pk) |

1/ The electrical measurements for table E-VIb (JAN, JANTX and JANTXV) of MIL-PRF-19500 are as follows: Subgroups 2, 3, and 6, see table II herein, steps 1, 2, 3, 4, 5, and 6.
2/ The electrical measurements for table E-VII of MIL-PRF-19500 are as follows: Subgroups 2, 3, and 6, see table II herein, steps 1, 2, 3, 4, 5, and 6.



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:29Z
Check the source to verify that this is the current version before use.

* TABLE III. Group E inspection (all quality levels) for qualification and requalification only.

| Inspection | MIL-STD-750 | | Qualification inspection |
|---|---|---|---|
| | Method | Conditions | |
| Subgroup 1 | | | n = 45, c = 0 |
| Temperature cycling | 1051 | 500 cycles, -65°C to +150°C. | |
| Hermetic seal | 1071 | Gross leak only. | |
| Electrical measurement | | See table I, subgroup 2. | |
| Subgroup 2 | | | |
| Intermittent operating life | 1037 | $I_{AV} \geq 4.7A$, half sine wave or dc equivalent; $T_{ON} \geq 1$ minute; 6,000 cycles. | |
| Electrical measurements | | See table I, subgroup 2. | |
| Subgroups 4, 5, 6, 7, 8, and 9 | | | |
| Not applicable | | | |

5. PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When packaging of materiel is to be performed by DoD or in-house contractor personnel, these personnel need to contact the responsible packaging activity to ascertain packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activities within the Military Service or Defense Agency, or within the Military Service's system commands. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The notes specified in MIL-PRF-19500 are applicable to this specification.

6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number, and date of this specification.

b. Packaging requirements (see 5.1).

c. Lead finish and material (see 3.4.1 and 3.4.2).

d. Product assurance level and type designator.



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:29Z
Check the source to verify that this is the current version before use.

6.3 Qualification. With respect to products requiring qualification, awards will be made only for products which are, at the time of award of contract, qualified for inclusion in Qualified Manufacturers List (QML-19500) whether or not such products have actually been so listed by that date. The attention of the contractors is called to these requirements, and manufacturers are urged to arrange to have the products that they propose to offer to the Federal Government tested for qualification in order that they may be eligible to be awarded contracts or orders for the products covered by this specification. Information pertaining to qualification of products may be obtained from Defense Supply Center, Columbus, ATTN: DSCC/VQE, P.O. Box 3990, Columbus, OH 43218-3990 or e-mail vqe.chief@dla.mil.

6.4 Changes from previous issue. The margins of this specification are marked with asterisks to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:
Army - CR
Navy - EC
Air Force - 11
DLA - CC

Preparing activity:
DLA - CC

(Project 5961-2006-080)

Review activities:
Army - AV, MI
Air Force - 19, 99

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil/.



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:29Z
Check the source to verify that this is the current version before use.