FED. SUP CLASS.
5307

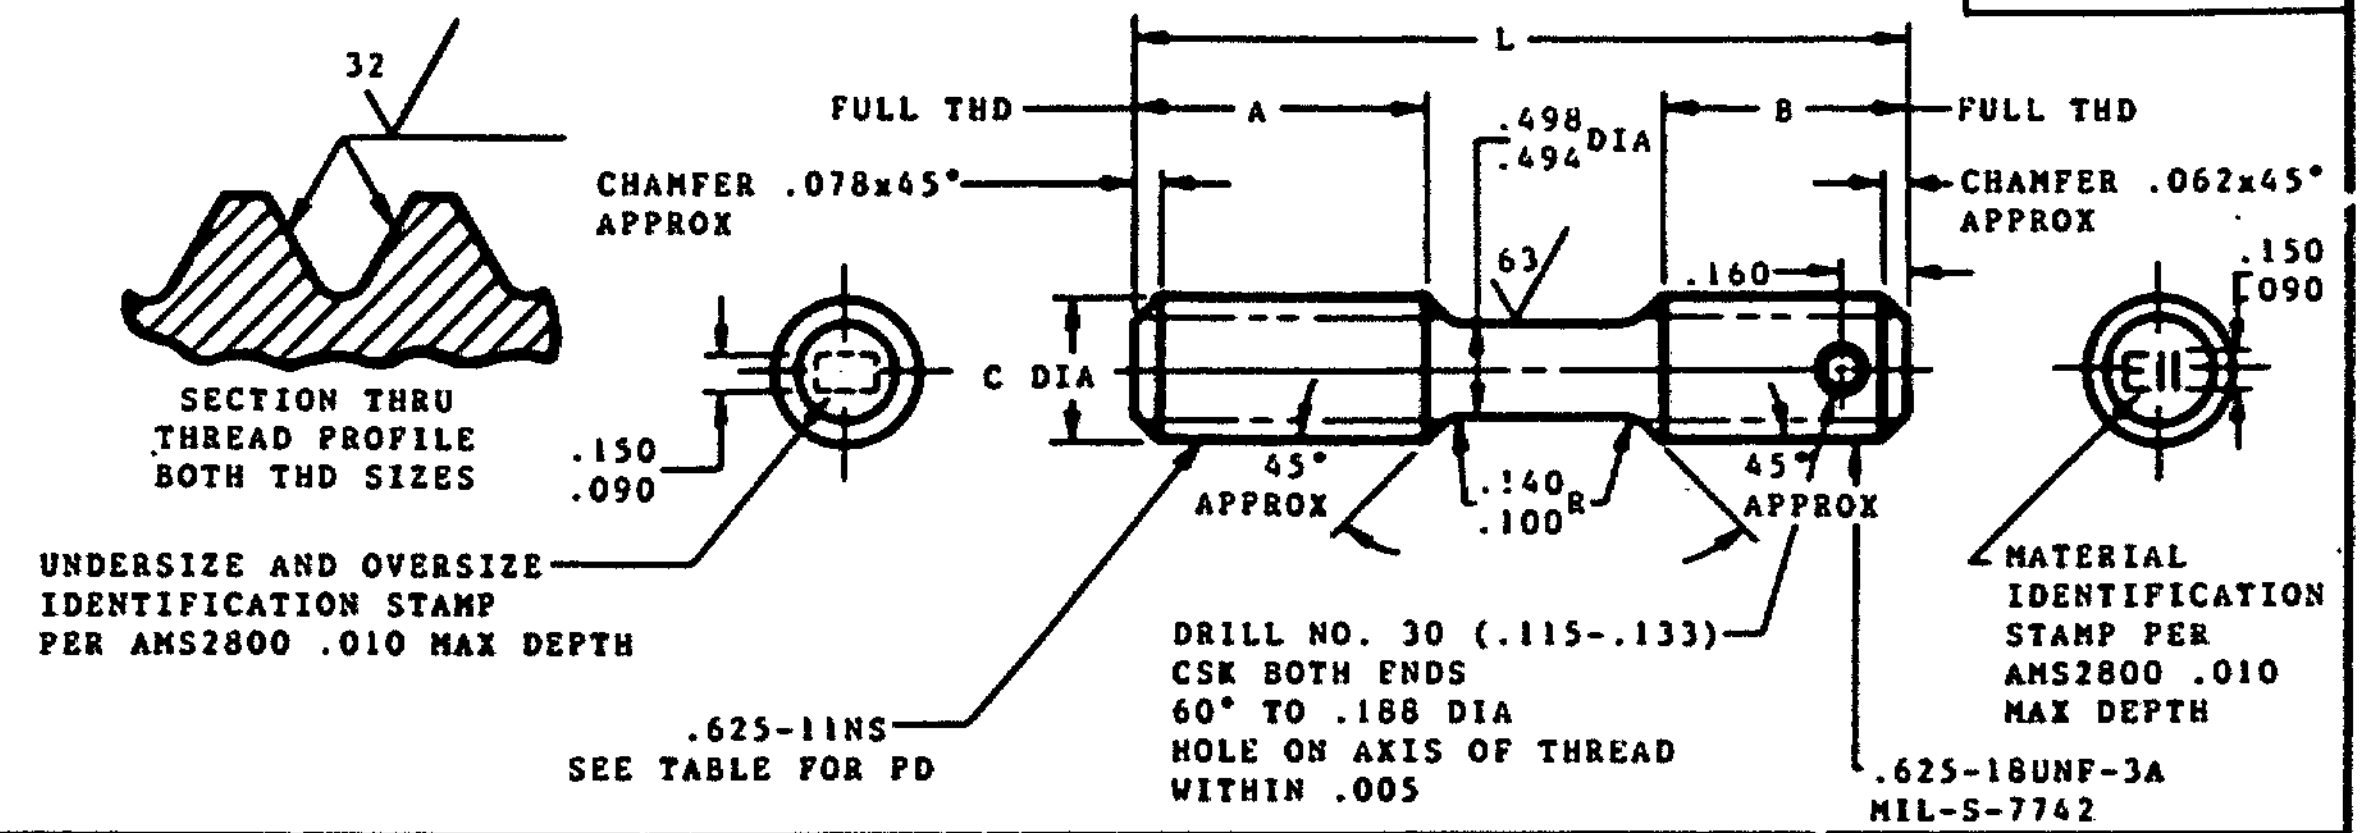
32
SECTION THRU THREAD PROFILE BOTH THD SIZES
FULL THD
A
L
.498
.494 DIA
B
FULL THD
CHAMFER .078x45° APPROX
CHAMFER .062x45° APPROX
63
.160
.150
.090
C DIA
.150
.090
E11
45° APPROX
.140
.100 R
45° APPROX
UNDERSIZE AND OVERSIZE IDENTIFICATION STAMP PER AMS2800 .010 MAX DEPTH
MATERIAL IDENTIFICATION STAMP PER AMS2800 .010 MAX DEPTH
DRILL NO. 30 (.115-.133) CSK BOTH ENDS 60° TO .188 DIA HOLE ON AXIS OF THREAD WITHIN .005
.625-11NS SEE TABLE FOR PD
.625-18UNF-3A MIL-S-7742

UNDERSIZE AND OVERSIZE IDENTIFICATION			-.003	STANDARD	+.003	+.006	+.009	+.012
			(-3)	○	③	⑥	⑨	⑫
C			.620 -.625	.620 -.625	.620 -.625	.620 -.625	.629 -.634	.629 -.634
PD BEFORE PLATING			.5682-.5692	.5712-.5722	.5742-.5752	.5772-.5782	.5802-.5812	.5832-.5842
PD AFTER PLATING			.5687-.5702	.5717-.5732	.5747-.5762	.5777-.5792	.5807-.5822	.5837-.5852
PD LEAD THREAD			.5610-.5630	.5640-.5660	.5670-.5690	.5700-.5720	.5730-.5750	.5760-.5780
L	A	B	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER
2.500	1.250	1.000	AN130511	AN130512	AN130513	AN130514	AN130515	AN130516
2.562	1.250	1.062	AN130517	AN130518	AN130519	AN130520	AN130521	AN130522
2.625	1.250	1.062	AN130523	AN130524	AN130525	AN130526	AN130527	AN130528
2.688	1.250	1.062	AN130529	AN130530	AN130531	AN130532	AN130533	AN130534
2.750	1.250	1.062	AN130535	AN130536	AN130537	AN130538	AN130539	AN130540
2.812	1.562	1.000	AN130541	AN130542	AN130543	AN130544	AN130545	AN130546
2.875	1.562	1.062	AN130547	AN130548	AN130549	AN130550	AN130551	AN130552
2.938	1.562	1.125	AN130553	AN130554	AN130555	AN130556	AN130557	AN130558
3.000	1.562	1.125	AN130559	AN130560	AN130561	AN130562	AN130563	AN130564
3.062	1.562	1.125	AN130565	AN130566	AN130567	AN130568	AN130569	AN130570
3.125	1.562	1.125	AN130571	AN130572	AN130573	AN130574	AN130575	AN130576
3.250	1.562	1.125	AN130577	AN130578	AN130579	AN130580	AN130581	AN130582
3.375	1.562	1.125	AN130583	AN130584	AN130585	AN130586	AN130587	AN130588
3.500	1.562	1.125	AN130589	AN130590	AN130591	AN130592	AN130593	AN130594
3.625	1.562	1.125	AN130595	AN130596	AN130597	AN130598	AN130599	AN130600
3.750	1.562	1.125	AN130601	AN130602	AN130603	AN130604	AN130605	AN130606
3.875	1.562	1.125	AN130607	AN130608	AN130609	AN130610	AN130611	AN130612
4.000	2.250	1.125	AN130613	AN130614	AN130615	AN130616	AN130617	AN130618
4.125	2.250	1.125	AN130619	AN130620	AN130621	AN130622	AN130623	AN130624
4.250	2.250	1.125	AN130625	AN130626	AN130627	AN130628	AN130629	AN130630
4.375	2.250	1.125	AN130631	AN130632	AN130633	AN130634	AN130635	AN130636
4.500	2.250	1.125	AN130637	AN130638	AN130639	AN130640	AN130641	AN130642
4.625	2.250	1.125	AN130643	AN130644	AN130645	AN130646	AN130647	AN130648
4.750	2.250	1.125	AN130649	AN130650	AN130651	AN130652	AN130653	AN130654
4.875	2.250	1.125	AN130655	AN130656	AN130657	AN130658	AN130659	AN130660
5.000	2.250	1.125	AN130661	AN130662	AN130663	AN130664	AN130665	AN130666
5.125	2.250	1.125	AN130667	AN130668	AN130669	AN130670	AN130671	AN130672
5.250	2.250	1.125	AN130673	AN130674	AN130675	AN130676	AN130677	AN130678
5.375	2.250	1.125	AN130679	AN130680	AN130681	AN130682	AN130683	AN130684
5.500	2.250	1.125	AN130685	AN130686	AN130687	AN130688	AN130589	AN130690
5.625	2.250	1.125	AN130691	AN130692	AN130693	AN130694	AN130695	AN130696
5.750	2.250	1.125	AN130697	AN130698	AN130699	AN130700	AN130701	AN130702
5.875	2.250	1.125	AN130703	AN130704	AN130705	AN130706	AN130707	AN130708
6.000	2.250	1.125	AN130709	AN130710	AN130711	AN130712	AN130713	AN130714

INACTIVE FOR DESIGN AFTER 26 OCTOBER 1972. NO SUPERSEDING STANDARD.

NOTE: PITCH DIAMETERS OF BOTH THREADED ENDS SHALL BE CONCENTRIC WITHIN .006 FIR.
MATERIAL: STEEL AMS 6322. (AMS 6320 MATERIAL MAY ALSO BE USED FOR THESE PARTS UNTIL 1 JAN 1960.)
HARDNESS: ROCKWELL C26-32.
FINISH: CADMIUM PLATE AMS 2400. DIMENSIONS ARE AFTER PLATING EXCEPT WHERE SHOWN.
SURFACE ROUGHNESS: AS 291
MANUFACTURING SPECIFICATION AMS 7456.
③ INSPECTION: ALL PARTS SHALL UNDERGO MAGNETIC INSPECTION IN ACCORDANCE WITH AMS2640.
BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED: TOLERANCES; LINEAR DIMENSIONS ±.010, ANGULAR DIMENSIONS ±5°.
DO NOT USE INASSIGNED PART NUMBERS.
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE.

APPROVED 19 May 50 REVISED ① 23 Jun 58 ② 26 Oct 72 ③ 30 June 1986

PA 11
CUST AV, AS
11

AIR FORCE-NAVY AERONAUTICAL STANDARD

STUD - STRAIGHT, DRILLED, NECKED, .625-11 x .625-18

**AN130499
THRU
AN130774**

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

NOTE: This drawing was approved by joint action of the Air Force and Navy Departments as the Air Force-Navy standard for this product. This drawing supersedes all antecedent standard drawings for the same product and shall become effective for the procurement of aeronautical supplies or for use in new design, not later than 6 months after the latest date of approval shown.

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:27Z
Check the source to verify that this is the current version before use.

*U.S. GOVERNMENT PRINTING OFFICE: 1961-351-415/3611

Project No. 5307-0365