
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

AN157101 THRU AN157400

FSC 5307

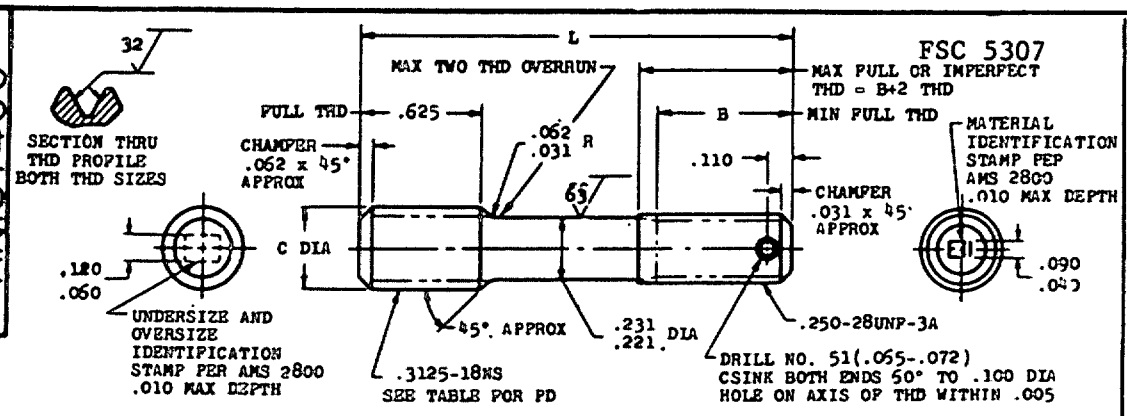

UNDERSIZE AND OVERSIZE IDENTIFICATION		-.003 (-3)	STANDARD	+.003 (3)	+.006 (6)	+.009 (9)	+.012 (12)
C		.307- .312	.307- .312	.307- .312	.307- .312	.316- .321	.316- .321
PD BEFORE PLATING		.2775-.2785	.2805-.2815	.2835-.2845	.2865-.2875	.2895-.2905	.2925-.2935
PD AFTER PLATING		.2780-.2795	.2810-.2825	.2840-.2855	.2870-.2885	.2900-.2915	.2930-.2945
PD LEAD THREAD		.2710-.2734	.2740-.2764	.2770-.2794	.2800-.2824	.2830-.2854	.2860-.2884
L	B	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER
1.188	.438	AN157119	AN157120	AN157121	AN157122	AN157123	AN157124
1.250	.500	AN157125	AN157126	AN157127	AN157128	AN157129	AN157130
1.312	.562	AN157131	AN157132	AN157133	AN157134	AN157135	AN157136
1.375	.562	AN157137	AN157138	AN157139	AN157140	AN157141	AN157142
1.438	.562	AN157143	AN157144	AN157145	AN157146	AN157147	AN157148
1.500	.562	AN157149	AN157150	AN157151	AN157152	AN157153	AN157154
1.562	.562	AN157155	AN157156	AN157157	AN157158	AN157159	AN157160
1.625	.562	AN157161	AN157162	AN157163	AN157164	AN157165	AN157166
1.688	.562	AN157167	AN157168	AN157169	AN157170	AN157171	AN157172
1.750	.562	AN157173	AN157174	AN157175	AN157176	AN157177	AN157178
1.812	.562	AN157179	AN157180	AN157181	AN157182	AN157183	AN157184
1.875	.562	AN157185	AN157186	AN157187	AN157188	AN157189	AN157190
1.938	.562	AN157191	AN157192	AN157193	AN157194	AN157195	AN157196
2.000	.562	AN157197	AN157198	AN157199	AN157200	AN157201	AN157202
2.062	.562	AN157203	AN157204	AN157205	AN157206	AN157207	AN157208
2.125	.562	AN157209	AN157210	AN157211	AN157212	AN157213	AN157214
2.188	.562	AN157215	AN157216	AN157217	AN157218	AN157219	AN157220
2.250	.562	AN157221	AN157222	AN157223	AN157224	AN157225	AN157226
2.312	.562	AN157227	AN157228	AN157229	AN157230	AN157231	AN157232
2.375	.562	AN157233	AN157234	AN157235	AN157236	AN157237	AN157238
2.500	.562	AN157239	AN157240	AN157241	AN157242	AN157243	AN157244
2.625	.562	AN157245	AN157246	AN157247	AN157248	AN157249	AN157250
2.750	.562	AN157251	AN157252	AN157253	AN157254	AN157255	AN157256
2.875	.562	AN157257	AN157258	AN157259	AN157260	AN157261	AN157262
3.000	.562	AN157263	AN157264	AN157265	AN157266	AN157267	AN157268
3.125	.562	AN157269	AN157270	AN157271	AN157272	AN157273	AN157274
3.250	.562	AN157275	AN157276	AN157277	AN157278	AN157279	AN157280
3.375	.562	AN157281	AN157282	AN157283	AN157284	AN157285	AN157286
3.500	.562	AN157287	AN157288	AN157289	AN157290	AN157291	AN157292
3.625	.562	AN157293	AN157294	AN157295	AN157296	AN157297	AN157298

NOTE: PITCH DIAMETERS OF BOTH THREADED ENDS SHALL BE CONCENTRIC WITHIN .006 FIR.

MATERIAL: [illegible] 6320 (AMS 6320 MATERIAL MAY ALSO BE USED FOR THIS PART UNTIL JANUARY 1, 197[illegible]).
HARDNESS: ROCKWELL C26-32.
FINISH: CADMIUM PLATE AMS 2400. DIMENSIONS ARE AFTER PLATING EXCEPT WHERE SHOWN.
SURFACE ROUGHNESS: AS 107.
MANUFACTURING SPECIFICATION: AMS 7456. PARTS SUBJECT TO MAGNETIC INSPECTION PER AMS 2640.
BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED: TOLERANCES; LINEAR DIMENSIONS ±.010, ANGULAR DIMENSIONS ±2°.

(4) CANCELED AS OF 9 OCT 87

(2) DO NOT USE UNASSIGNED PART NUMBERS.

(2) INACTIVE FOR DESIGN AFTER 26 OCTOBER 1972. NO SUPERSEDING STANDARD.

THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE.

APPROVED [illegible] REVISED (1) 15 Mar 55 (2) 26 Oct 72 (4) 9 OCT 87

PROCUREMENT SPECIFICATION	AIR FORCE-NAVY AERONAUTICAL STANDARD	AN157101 THRU AN157400
[illegible]	STUD-STEPPED, DRILLED, 2 DIA ENGAGEMENT, .3125-18 x .250-28	

E-24-121

Project 5307-0387

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:27Z
Check the source to verify that this is the current version before use.