
# AN160401 THRU AN160700

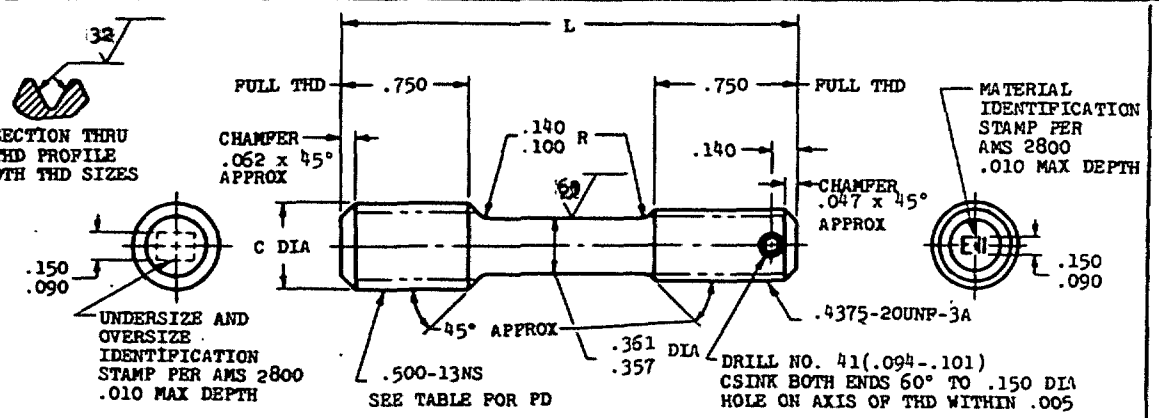


| UNDERSIZE AND OVERSIZE IDENTIFICATION | -.003 (-3) | STANDARD | +.003 (3) | +.006 (6) | +.009 (9) | +.012 (12) |
|---|---|---|---|---|---|---|
| C | .495- .500 | .495- .500 | .495- .500 | .495- .500 | .504- .509 | .504- .509 |
| PD BEFORE PLATING | .4518-.4528 | .4548-.4558 | .4578-.4588 | .4608-.4618 | .4638-.4648 | .4668-.4678 |
| PD AFTER PLATING | .4523-.4538 | .4553-.4568 | .4583-.4598 | .4613-.4628 | .4643-.4658 | .4673-.4688 |
| PD LEAD THREAD | .4450-.4470 | .4480-.4500 | .4510-.4530 | .4540-.4560 | .4570-.4590 | .4600-.4620 |
| L | PART NUMBER | PART NUMBER | PART NUMBER | PART NUMBER | PART NUMBER | PART NUMBER |
| 1.750 | AN160413 | AN160414 | AN160415 | AN160416 | AN160417 | AN160418 |
| 1.812 | AN160419 | AN160420 | AN160421 | AN160422 | AN160423 | AN160424 |
| 1.875 | AN160425 | AN160426 | AN160427 | AN160428 | AN160429 | AN160430 |
| 1.938 | AN160431 | AN160432 | AN160433 | AN160434 | AN160435 | AN160436 |
| 2.000 | AN160437 | AN160438 | AN160439 | AN160440 | AN160441 | AN160442 |
| 2.062 | AN160443 | AN160444 | AN160445 | AN160446 | AN160447 | AN160448 |
| 2.125 | AN160449 | AN160450 | AN160451 | AN160452 | AN160453 | AN160454 |
| 2.188 | AN160455 | AN160456 | AN160457 | AN160458 | AN160459 | AN160460 |
| 2.250 | AN160461 | AN160462 | AN160463 | AN160464 | AN160465 | AN160466 |
| 2.312 | AN160467 | AN160468 | AN160469 | AN160470 | AN160471 | AN160472 |
| 2.375 | AN160473 | AN160474 | AN160475 | AN160476 | AN160477 | AN160478 |
| 2.438 | AN160479 | AN160480 | AN160481 | AN160482 | AN160483 | AN160484 |
| 2.500 | AN160485 | AN160486 | AN160487 | AN160488 | AN160489 | AN160490 |
| 2.625 | AN160491 | AN160492 | AN160493 | AN160494 | AN160495 | AN160496 |
| 2.750 | AN160497 | AN160498 | AN160499 | AN160500 | AN160501 | AN160502 |
| 2.875 | AN160503 | AN160504 | AN160505 | AN160506 | AN160507 | AN160508 |
| 3.000 | AN160509 | AN160510 | AN160511 | AN160512 | AN160513 | AN160514 |
| 3.125 | AN160515 | AN160516 | AN160517 | AN160518 | AN160519 | AN160520 |
| 3.250 | AN160521 | AN160522 | AN160523 | AN160524 | AN160525 | AN160526 |
| 3.375 | AN160527 | AN160528 | AN160529 | AN160530 | AN160531 | AN160532 |
| 3.500 | AN160533 | AN160534 | AN160535 | AN160536 | AN160537 | AN160538 |
| 3.625 | AN160539 | AN160540 | AN160541 | AN160542 | AN160543 | AN160544 |
| 3.750 | AN160545 | AN160546 | AN160547 | AN160548 | AN160549 | AN160550 |
| 3.875 | AN160551 | AN160552 | AN160553 | AN160554 | AN160555 | AN160556 |
| 4.000 | AN160557 | AN160558 | AN160559 | AN160560 | AN160561 | AN160562 |
| 4.125 | AN160563 | AN160564 | AN160565 | AN160566 | AN160567 | AN160568 |
| 4.250 | AN160569 | AN160570 | AN160571 | AN160572 | AN160573 | AN160574 |
| 4.375 | AN160575 | AN160576 | AN160577 | AN160578 | AN160579 | AN160580 |
| 4.500 | AN160581 | AN160582 | AN160583 | AN160584 | AN160585 | AN160586 |
| 4.625 | AN160587 | AN160588 | AN160589 | AN160590 | AN160591 | AN160592 |
| 4.750 | AN160593 | AN160594 | AN160595 | AN160596 | AN160597 | AN160598 |
| 4.875 | AN160599 | AN160600 | AN160601 | AN160602 | AN160603 | AN160604 |
| 5.000 | AN160605 | AN160606 | AN160607 | AN160608 | AN160609 | AN160610 |
| 5.125 | AN160611 | AN160612 | AN160613 | AN160614 | AN160615 | AN160616 |
| 5.250 | AN160617 | AN160618 | AN160619 | AN160620 | AN160621 | AN160622 |

NOTE: PITCH DIAMETERS OF BOTH THREADED ENDS SHALL BE CONCENTRIC WITHIN .006 FIR.
MATERIAL: [redacted] (AMS 6320 MATERIAL MAY ALSO BE USED FOR THIS PART UNTIL JANUARY 1, 1957).
HARDNESS: ROCKWELL C26-32.
FINISH: CADMIUM PLATE AMS 2400. DIMENSIONS ARE AFTER PLATING EXCEPT WHERE SHOWN.
SURFACE ROUGHNESS: AS 107.
MANUFACTURING SPECIFICATION: AMS 7456. PARTS SUBJECT TO MAGNETIC INSPECTION PER AMS 2640.
BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED: TOLERANCES; LINEAR DIMENSIONS ±.010, ANGULAR DIMENSIONS ±2°.

(2) **INACTIVE FOR DESIGN** AFTER 26 OCTOBER 1972. NO SUPERSEDING STANDARD.
DO NOT USE UNASSIGNED PART NUMBERS.

THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE.

APPROVED 29 May 50 REVISED (1) 25 Mar 55 (2) 26 Oct 72

| PROCUREMENT SPECIFICATION | AIR FORCE-NAVY AERONAUTICAL STANDARD | AN160401 THRU AN160700 |
|---|---|---|
| NONE | [redacted] STUD-STEPPED, DRILLED, NECKED, 1.5 DIA ENGAGEMENT, .500-13 x .4375-20 | |

E-25-121

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

NOTE: This drawing was approved by joint action of the Air Force and Navy Departments as the Air Force-Navy standard for this product. This drawing supersedes all superseded standard drawings for the same product and shall become effective for the procurement of commercial supplies, or for use in new design, not later than 6 months after the latest date of approval shown.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:28Z
Check the source to verify that this is the current version before use.