INCH-POUND
AN3308
REVISION 7
9 June 2023
SUPERSEDING
REVISION 6
7 June 2011

DETAIL SPECIFICATION SHEET

RELAY, 10 AMP, 3 PDT, SEALED, CONNECTOR MOUNTING, CLASS O

Inactive for new design after 17 November 1954. No superseding document.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the relay described herein shall consist of this specification and MIL-PRF-6106.

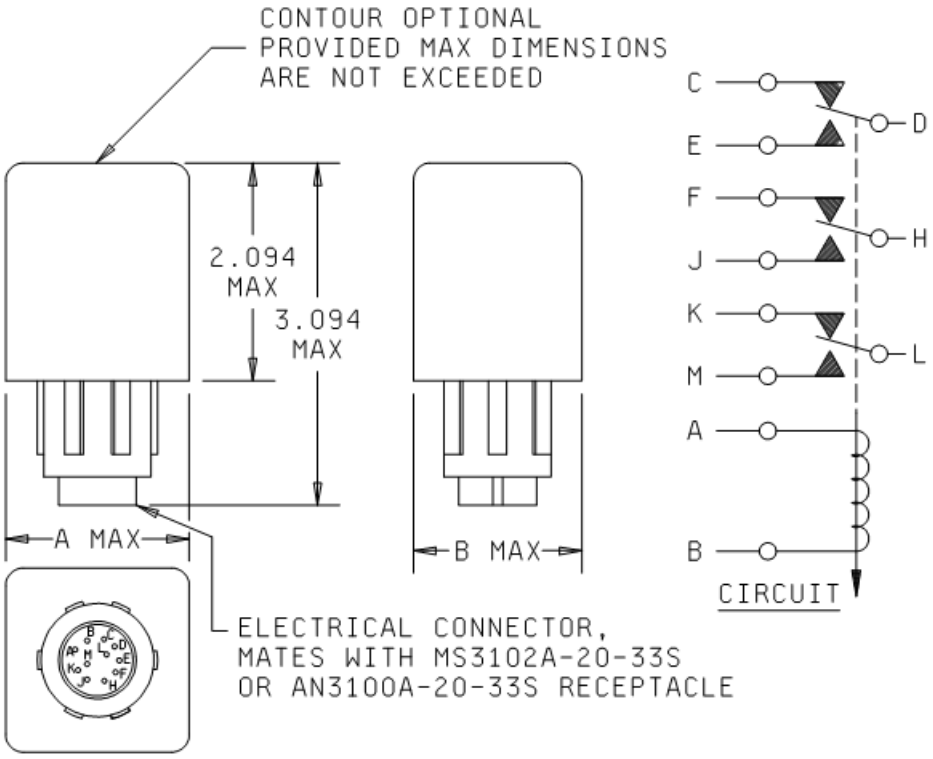


FIGURE 1. Configurations and dimensions.

AMSC N/A

FSC 5945

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:19Z
Check the source to verify that this is the current version before use.

AN Part Number	A (MAX)	B (MAX)
AN3308-1	2.094	1.718
AN3308-2	2.188	1.813

Inches	mm
.016	0.040
1.719	4.366
1.813	4.604
2.094	3.094
2.188	5.556

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance are ±.005 (0.013 mm).

FIGURE 1. Configurations and dimensions - Continued.

REQUIREMENTS

Operating cycles: 50,000 minimum.

Contact data:

Contact voltage drop:

Initial: 0.150 volt maximum. Applicable only for AN3308-2.

After life: 0.175 maximum. Applicable only for AN3308-2.

Load ratings: See Table I.

TABLE I - Rated contact load (per pole).

Type of load	Amperes
Resistive (DC)	10
Resistive (AC 400 Hz, 115 volts)	10
Inductive	10
Motor	6

Overload current: See MIL-PRF-6106. Not applicable to AN3308-1.

Rupture current: See MIL-PRF-6106. Not applicable AN3308-1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:19Z
Check the source to verify that this is the current version before use.

Coil data:

Nominal coil voltage: 28 volts.

Maximum operating voltage: 29 volts.

Pickup voltage: 18 volts.

Dropout voltage: 2 volts, minimum; 7 volts, maximum.

Rated duty: Continuous.

Coil current: 0.35 amperes, maximum.

Physical data:

Weight: 0.6 pounds, maximum.

Qualification by similarity: See MIL-PRF-6106.

Retention of qualification: To retain qualification, the manufacturer shall submit group A acceptance reports every 36 months to the qualifying activity.

Quality conformance inspection: Performance of groups B and C tests are not applicable.

Part or Identifying Number (PIN): AN3308-1 and AN3308-2.

AN3308-2 relays shall meet the mixed loads current requirements specified in MIL-PRF-6106. The relay shall be equipped with a glass to metal sealed electrical connector.

Supersession information: Supersedes USAF Drawing 50B6185.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:19Z
Check the source to verify that this is the current version before use.

The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Referenced documents:

MIL-PRF-6106

Custodian:
Air Force - 85
DLA - CC

Preparing activity:
DLA - CC

(Project 5945-2023-040)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil/ .

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:19Z
Check the source to verify that this is the current version before use.