PROJECT NO. 5310-0544


FSC 5310

USER SYMBOLS:

REVIEWER SYMBOLS: NAVY-AS ARMY-AV USAF-11 DSA-IS

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

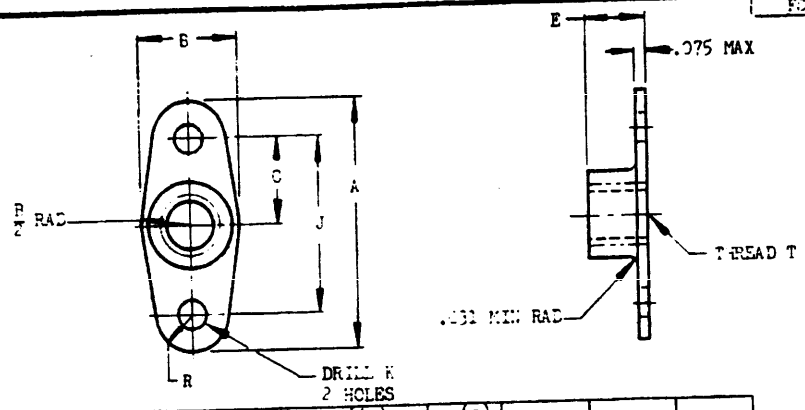

SIZE	A MAX	B MAX	B MIN	(b) C NOM	(a) E MAX	J ±.002	K +.005 -.000 DIA	R MIN RAD
NO. 6	.985	.407	.250	.344	.234	.688	.098	.100
NO. 8			.282		.297			
NO. 10			.314		.312			
1/4	1.297	.516	.374	.500	.375	1.000	.130	.115
5/16		.532	.500					.125
3/8		.641	.609		.453			

DASH NUMBERS STEEL	DASH NUMBERS COR RES STEEL	THREAD T
(c) ~~F420~~	~~C620~~	~~NO. 6-32UNF-2B~~
(c) ~~F836~~	~~C836~~	~~NO. 8-32NF-2B~~
F1032	C1032	NO. 10-32NF-3B
F428	C428	1/4 -20UNF-3B
F528	C528	5/16-24UNF-3B
F624	C624	3/8 - 24 UNF - 3B

DASH NUMBERS STEEL	DASH NUMBERS COR RES STEEL	THREAD T
F632	C632	NO. 6-32NC-2B
F832	C832	NO. 8-32NC-2B
(c) ~~F1028~~	C1028	~~NO. 10-28NC-2B~~
(c) ~~F428~~	~~C428~~	~~1/4 -20UNC-3B~~
(c) ~~F518~~	~~C518~~	~~5/16-18UNC-3B~~
(c) ~~F616~~	C616	~~3/8 - 16 UNC - 3B~~

INACTIVE FOR NEW DESIGN AFTER 7 APRIL 1967 USE MS21047 OR MS21048.

(a) MINIMUM E NOT SPECIFIED. LIMITED ONLY BY STRENGTH REQUIREMENT OF SPECIFICATION.

(b) THE CENTER OF THE TAPPED HOLE SHALL NOT DEVIATE IN ANY DIRECTION FROM THE CENTER OF THE PLATE NUT AS DETERMINED BY THE RIVET HOLES BY MORE THAN .005.

(c) DASH NUMBERS F420, F836, C420, C836, F1024, F428, F528, F616, C1024, C428, C518, AND C616 INACTIVE FOR DESIGN AFTER 14 APRIL 1949.

FOR DEFINITION AND APPLICATION OF DRAWING STATUS NOTE, SEE ANA BULLETIN NO. 337.

SHAPE OF TOP OPTIONAL TO SUIT LOCKING METHOD.

NUTS MAY BE MADE OF SHEET METAL.

NUTS FOR USE BY WELDING TO BE MADE OF COR RES STEEL AND WITHOUT RIVET HOLES. SPACING OF WELDING PROJECTIONS MUST BE EQUAL TO DIMENSION J.

ADD W BEFORE COR RES STEEL DASH NUMBERS FOR PLATE NUTS FOR USE BY WELDING.

EXAMPLES OF PART NUMBERS: AN362F428 = 1/4-20 STEEL NUT.
AN362C428 = 1/4-20 COR RES STEEL NUT.
AN362W428 = 1/4-20 COR RES STEEL NUT FOR USE BY WELDING.

(6) * QUALIFICATION NOT REQUIRED

DIMENSIONS IN INCHES, UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.016. FOR INSTALLATION INSTRUCTIONS SEE MS33566.

(6) CANCELLED SEE SHEET 2

PROCUREMENT SPECIFICATION	AIR FORCE-NAVY AERONAUTICAL STANDARD	AN362
(6) *MIL-N-25027	NUT, SELF-LOCKING, PLATE, NON-COUNTERSUNK, 550°F	SHEET 1 OF 2

SUPERSEDES USAF DRAWING 362

APPROVED 13 Jul 45 REVISED (1) 20 Nov 45 (2) 14 Apr 49 (3) 10 May 56 (4) 17 Feb 59 (5) 7 Apr 67 (6) 25 May 72

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:15Z
Check the source to verify that this is the current version before use.

PROJECT NO. 5310-0544

FSC 5310

(6)

CANCELED IN PART AFTER 25 MAY 1972 DASH NUMBERS

F640, F836, C640, C836, F1024, F420, F518, F616, C1024, C420, C518, AND C616 NOT CANCELED. FOR SUBSTITUTIVE PARTS SEE INTERCHANGEABILITY TABLES ON MS21047 AND MS21048.

☆ U. S. GOVERNMENT PRINTING OFFICE: 1972-714-167/7796

APPROVED 13 Jul 45 REVISED (6) FOR CHANGES SEE SHEETS 1 AND 2.

PROCUREMENT SPECIFICATION	AIR FORCE-NAVY AERONAUTICAL STANDARD	AN362
*MIL-N-25027	NUT, SELF-LOCKING, PLATE, NON-COUNTERSUNK, 550°F	SHEET 2 OF 2

USER SYMBOLS:

REVIEWER SYMBOLS: NAVY-AS ARMY-AV USAF-11 DSA-IS

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS"

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:15Z
Check the source to verify that this is the current version before use.